THE BOOK OF BARNS

HONOR-BILT-ALREADY CUT

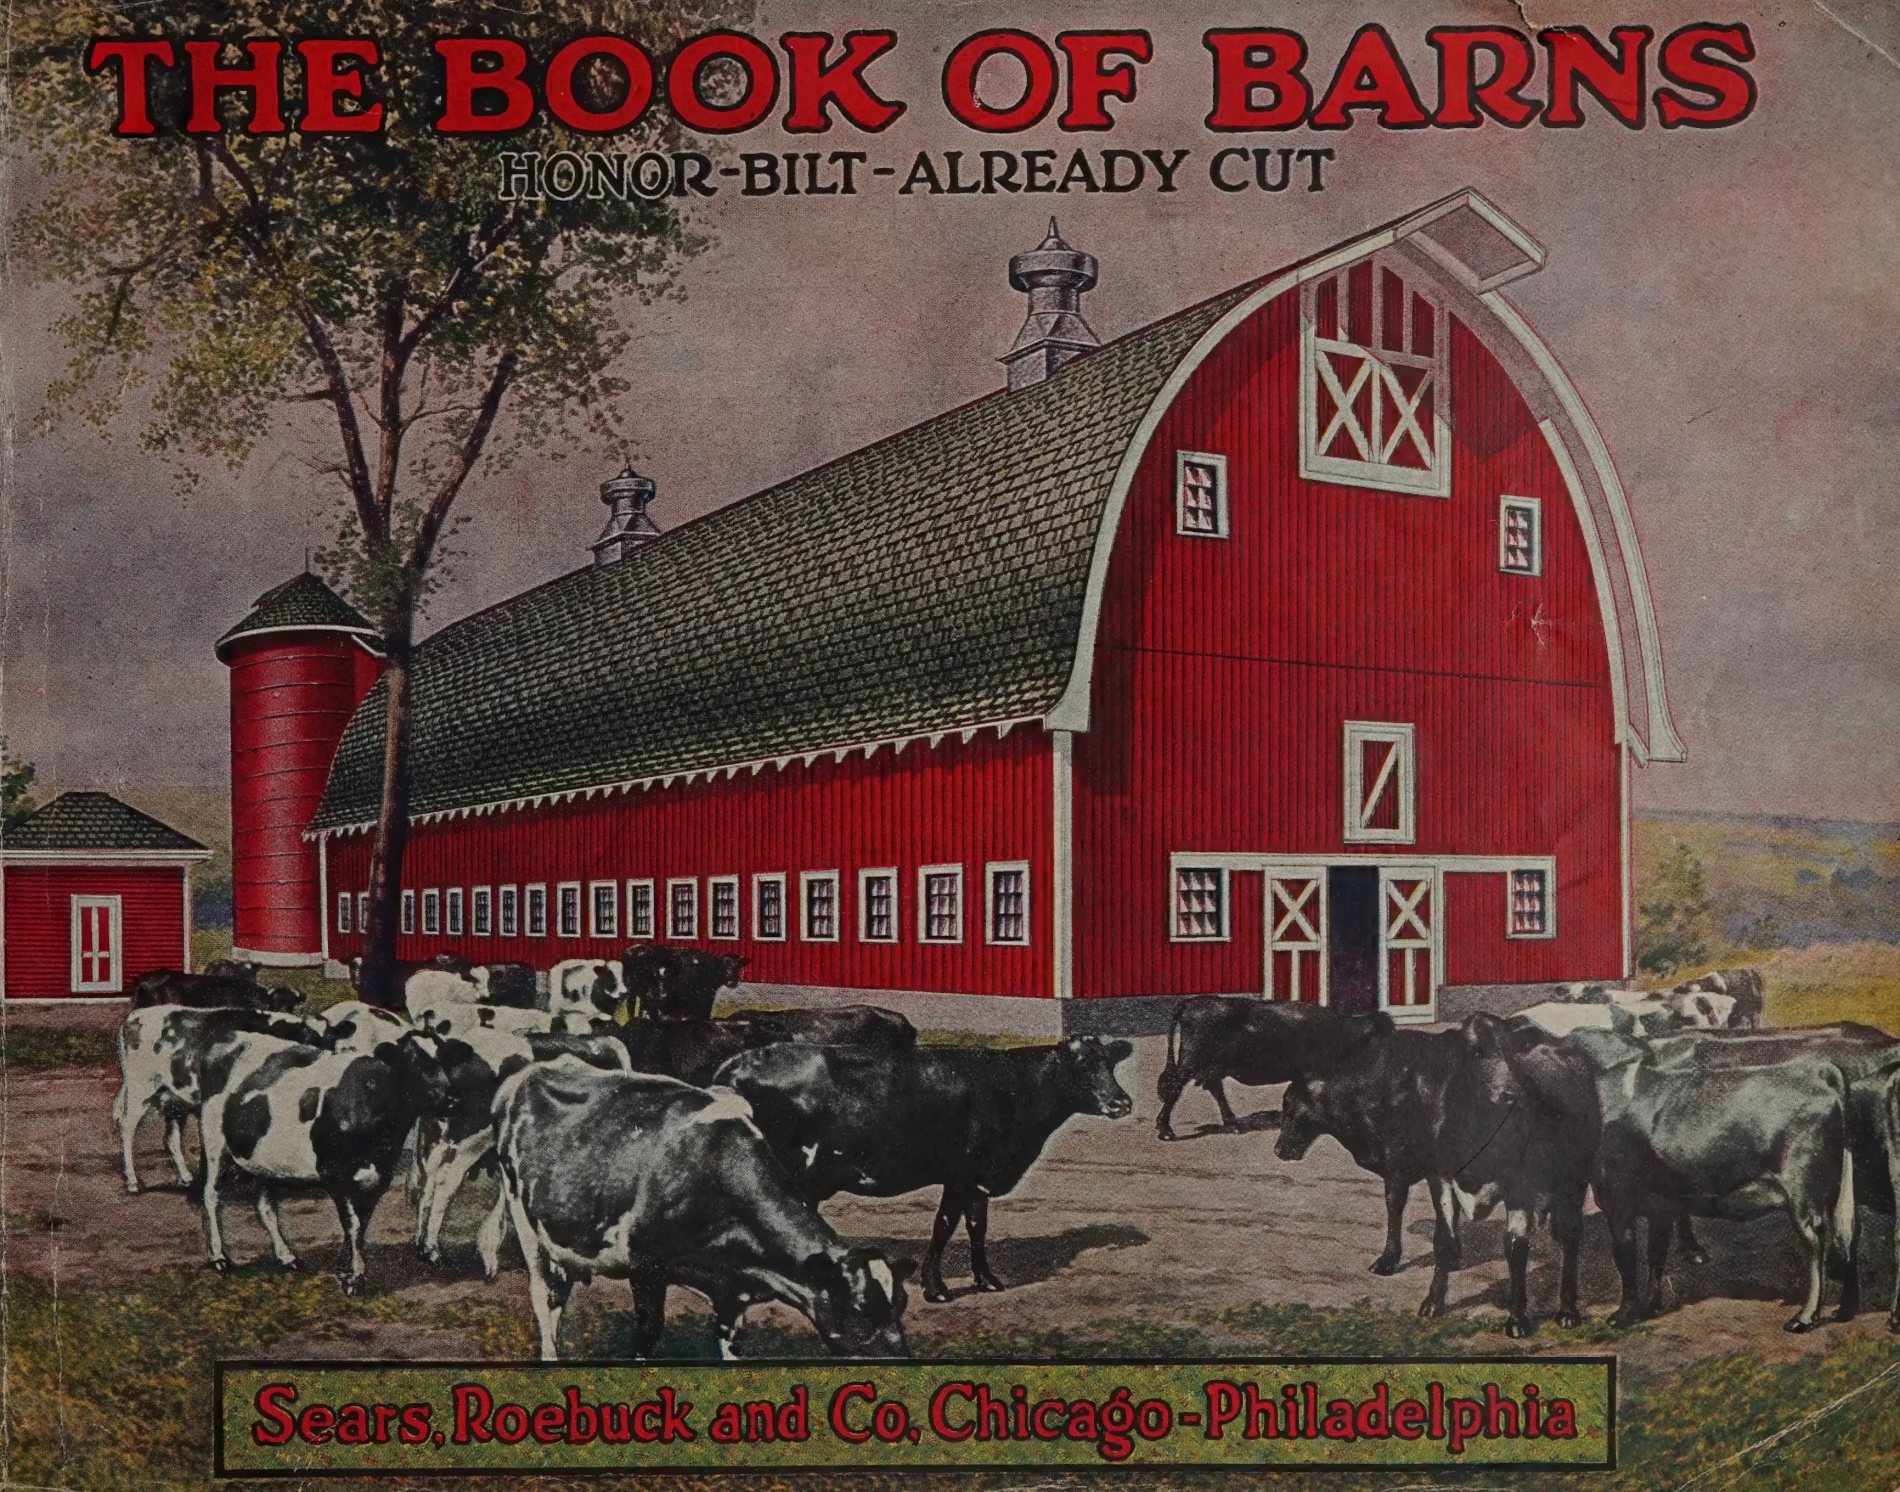

Sears, Roebuck and Co, Chicago-Philadelphia

GUARANTEE

We Guarantee that all of the framing material for our "Already Cut" Modern Farm Buildings will be cut and fitted, ready to nail in place.

We Guarantee the "Already Cut" Modern Farm Buildings described, illustrated, specified and priced in this catalog, as well as every other item listed and illustrated herein, to be exactly as represented.

We Guarantee that every Farm Building will arrive at destination in FIRST CLASS CONDITION.

We Guarantee to make PROMPT SHIPMENT of your order.

We Guarantee that after the shipment has been examined at the station, if the Farm Building does not come up to the purchaser's expectations in every respect, by notifying us in writing it can be shipped back AT OUR EXPENSE and we will promptly RETURN THE MONEY PAID and any freight charges that may have been paid by the purchaser.

We Guarantee to replace any piece or part that may be damaged in transit or otherwise considered unsatisfactory, or to return the price of such item, as the purchaser may direct, upon receipt of the paid freight expense bill with a notation by the freight agent stating the damage incurred.

Remember, a guarantee is worth only what is behind it.
Sears, Roebuck and Co. stand back of this guarantee.

SEARS, ROEBUCK AND CO. **CHICAGO-PHILADELPHIA**

AVERY LIBRARY
COLUMBIA UNIVERSITY
Classics
AT
727
Se17

Reduced Prices on "Honor Bilt" Barns

THE COUNTRY GENTLEMAN
Size, 36 feet by 104 feet.
1920 Price, $4,235.00
Present Price, $2,245.00
Page 7

Reduced Prices on All Sizes

Big reductions have been made on all farm building prices in this book. Every one of these prices has been reduced nearly 50 per cent. On this page we show you comparisons between our last year's prices and the present low prices.

We believe these comparisons will be of interest to you, as many of our customers have written asking how our present prices compare with last year's prices. See the big reductions we have made to make it worth while for you to order at once. These reductions mean a real saving to you. Our 1920 prices were never advanced to the high point justified by market prices. This means that when we now offer you a saving of $500.00 to $3,000.00 from our last year's prices you will actually be saving considerably more than this.

Right now is the time to order. The demand for all building materials has increased. Right now is the time to talk business with your carpenter or contractor. Labor is now in better shape than it has been for years. Right now deliveries can be made very promptly.

With all conditions favorable, don't you think the wise thing for you to do is to take advantage of your best opportunity to order an "HONOR BILT" Farm Building today?

READ OUR EASY PAYMENT PROPOSITION ON THE ORDER BLANK IN THE BACK OF THE BOOK.

THE BLUE RIBBON
Size, 36 feet by 140 feet.
1920 Price, $6,509.00
Present Price, $3,450.00
Page 9.

THE CYCLONE
Size, 40 feet by 140 feet.
1920 Price, $6,781.00
Present Price, $3,730.00
Page 10.

(See Other Side.)

F7207

SEARS, ROEBUCK AND CO.

COLUMBIA UNIVERSITY

Order Now! Pay Later! Save $500.00 to $3,000.00

THE STAR
Size, 20 feet by 32 feet.
1920 Price,
$810.00
Present Price,
$429.00
Page 29.

HIGH QUALITY GUARANTEED.

Although all prices of "HONOR BILT" Buildings have been greatly reduced, the same high quality of old has been maintained. Read our guarantee inside the front cover and page 1 showing eight good reasons why you should buy an "HONOR BILT" Already Cut Farm Building.

CORN CRIB AND GRANARY
Size, 28 feet by 52 feet.
1920 Price,
$2,438.00
Present Price,
$1,219.00
Page 34.

THE SUNLIGHT HOG HOUSE
Size, 24 feet by 72 feet.
1920 Price,
$1,481.00
Present Price,
$785.00
Page 30.

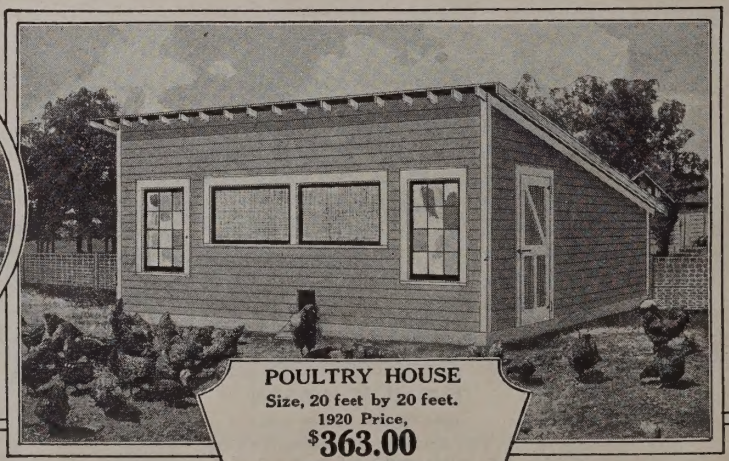

POULTRY HOUSE
Size, 20 feet by 20 feet.
1920 Price,
$363.00
Present Price,
$182.00
Page 37.

Easy Payments

(See Other Side.)

See Order Blank in Back of Book

F7207

SEARS, ROEBUCK AND CO.

LOOK AT THIS CLOSELY. EVERYTHING FOR YOUR MODERN FARM BUILDING CUT AND FITTED

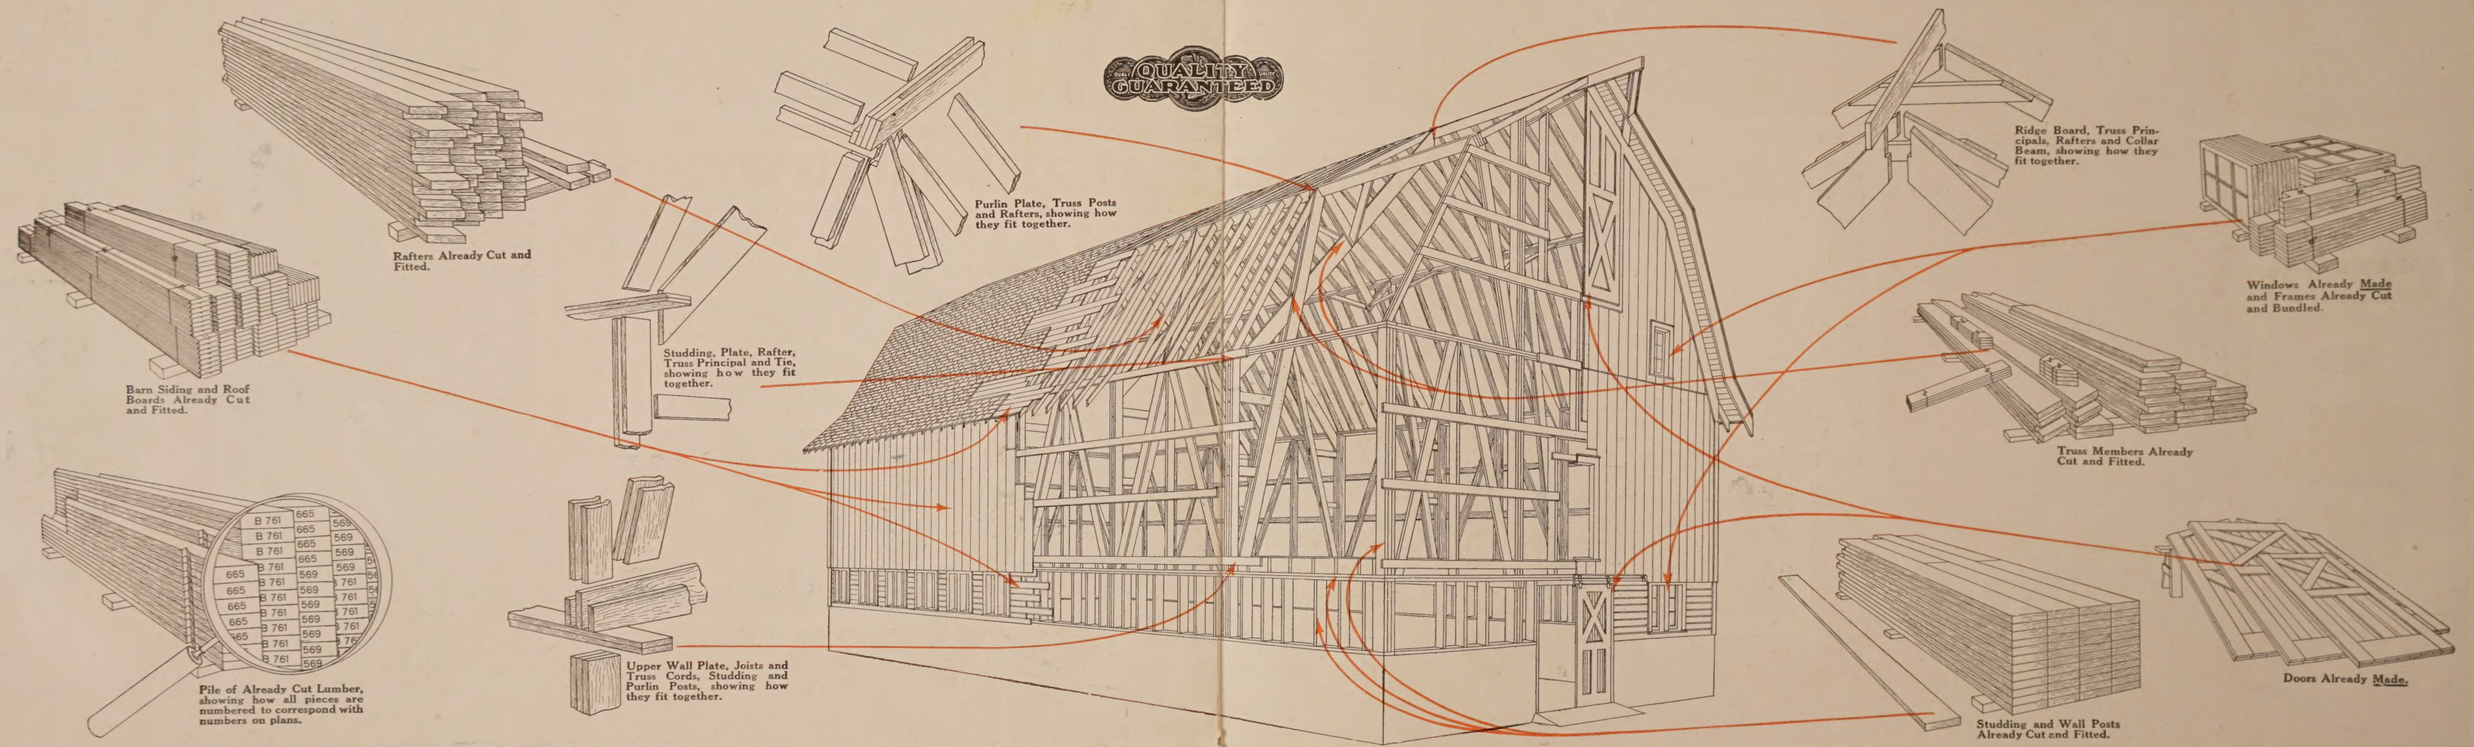
QUALITY GUARANTEED
Rafters Already Cut and Fitted.
Barn Siding and Roof Boards Already Cut and Fitted.
Pile of Already Cut Lumber, showing how all pieces are numbered to correspond with numbers on plans.
Studding, Plate, Rafter, Truss Principal and Tie, showing how they fit together.
Purlin Plate, Truss Posts and Rafters, showing how they fit together.
Upper Wall Plate, Joists and Truss Cords, Studding and Purlin Posts, showing how they fit together.
Ridge Board, Truss Principals, Rafters and Collar Beam, showing how they fit together.
Windows Already Made and Frames Already Cut and Bundled.
Truss Members Already Cut and Fitted.
Doors Already Made.
Studding and Wall Posts Already Cut and Fitted.

SEARS, ROEBUCK AND CO. - - - - - - CHICAGO

2864

THIS ROOFING FOR YOUR MODERN HOME OR BARN. SAFE, DURABLE, BEAUTIFUL AND ECONOMICAL

APPROVED BY THE UNDERWRITERS' LABORATORIES INC. UNDER DIRECTION OF THE NATIONAL BOARD OF FIRE UNDERWRITERS

LOOKS BETTER
COSTS LESS
AND WILL
OUT WEAR
WOOD
SHINGLES

ORIENTAL (FIRE CHIEF) SHINGLE ROLL SLATE SURFACED ROOFING

Our Own Trade Mark, Reg. in U. S. Pat. Off.

LOOKS LIKE PAINTED RED OR GREEN WOOD SHINGLES, but costs about half as much. Wears practically twice as long, and does not catch fire from sparks. Fire-Chief Shingle Roll Roofing does not have the defects, such as curled or warped shingles, so often found in wood shingle roofs.

THE PATTERN is made of red or sea green crushed slate (your choice of color), with black shaded lines inlaid between each shingle, a treatment that is permanent and beautiful. Needs no painting.

EITHER COLOR will make a nice roof, but we recommend the green because the shingle pattern is more pronounced.

EXCLUDES SNOW AND WATER BETTER THAN WOOD SHINGLES. Fire-Chief Shingle Roll Roofing is airtight and watertight.

WARMER THAN WOOD SHINGLES and helps to make a house cooler in Summer and warmer in Winter. Can be used over old shingles, giving double roof protection.

GUARANTEED FOR FIFTEEN YEARS. A written guarantee, backed by the entire resources of Sears, Roebuck and Co., protects you for fifteen years. If building is kept in good condition this roofing will wear many years longer.

48A3320—Red Fire-Chief Shingle Roll Roofing. Price, per roll of 108 square feet..... **$3.75**

Shipped from CHICAGO, ILL., or SOUTHERN OHIO.

Shipped from either of the following warehouses: ALBANY, N. Y., ST. PAUL, MINN., KANSAS CITY, MO., or ATLANTA, GA., at 30 cents per roll extra.

For 1¼-in. nails to lay this roofing over old shingles, add 7c per roll extra.

IT PAYS TO BUY GOOD ROOFING because the roof of a building has to stand the hardest weather conditions.

WEARING QUALITY FULLY TESTED. The formula and process for making Fire-Chief Shingle Roll Roofing have been in use for years in our Oriental Slate Surfaced Roofing. It has been put to the most severe tests. Roofing laid ten years ago is practically as good as the day it was laid. It is an asphalt roofing that defies heat, cold, rain and snow.

WE HAVE MADE THIS THE HEAVIEST, THICKEST, STRONGEST AND MOST BEAUTIFUL of all our roofings. It is the only natural effect shingle roll roofing in the market that we know of. Patented and sold only by us. Each roll weighs 90 pounds. **IT IS** the **HEAVIEST ROOFING WE HANDLE.**

THIS SHINGLE ROOFING IS FURNISHED IN ROLLS containing 108 square feet, 36 inches wide, with 8 square feet extra allowed for 2-inch laps, and will cover 100 square feet. All in one piece.

CEMENT AND GALVANIZED RUST RESISTING 1-INCH NAILS INCLUDED.

48A3321—Sea Green Fire-Chief Shingle Roll Roofing. Price, per roll of 108 square feet..... **$3.75**

Shipped from CHICAGO, ILL., or SOUTHERN OHIO.

Shipped from either of the following warehouses: ALBANY, N. Y., ST. PAUL, MINN., KANSAS CITY, MO., or ATLANTA, GA., at 30 cents per roll extra.

For 1¼-in. nails to lay this roofing over old shingles, add 7c per roll extra.

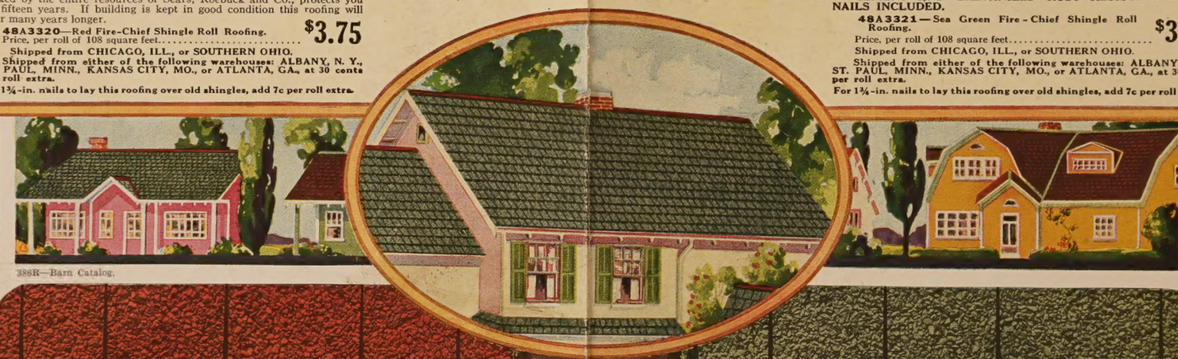

386R—Barn Catalog.

SOLD ONLY BY SEARS, ROEBUCK AND CO., CHICAGO. FOR ORIENTAL RIDGE ROLL, FLASHING AND VALLEY TO MATCH THIS ROOFING. WRITE FOR PRICES.

COLUMBIA UNIVERSITY

Eight Good Reasons Why You Should Buy Sears, Roebuck and Co.'s "Already Cut" Modern Farm Buildings

AVERY LIBRARY COLUMBIA UNIVERSITY

1—Our farm buildings are constructed scientifically. They combine the good features of the best farm buildings now in use.

2—Our farm buildings are designed according to the latest requirements of sanitation and convenience.

3—For every farm building the framing material is already cut and fitted. This prevents waste of material and reduces the labor about one-half. In addition, all doors are "ready made," ready to hang in place, making doors superior to those produced by hand carpentry.

4—Any handy man can erect our "already cut" modern farm buildings according to our plans. This saves a considerable amount on expert labor.

5—You have our guarantee that at the prices shown in this catalog we furnish enough material to complete the farm building. You will not be required to buy extra material.

6—We guarantee the material to be equal to or better than the grades specified in our general specifications.

7—When you deal with us you have the assurance that you are not paying for an experiment. We were the first to develop the mail order system of selling complete buildings. We have had many years of experience in this line. Our buildings are not experimental, but, having been built many times, have proved correct and practical in every detail.

8—We guarantee to please you in quality and price. We have thousands of letters from builders in all parts of the country who have saved big money by building the "Honor Bilt" way. The two letters printed directly below are representative of those we are constantly receiving from our customers.

Read These Letters

Sears, Roebuck and Co.
Gentlemen:—The Already Cut Barn which we purchased of you is all right in every respect. It is a beauty. I will be glad to show the barn to any callers. We saved about $750.00 on the transaction. Everything received has been satisfactory.
Yours truly,
ROSCOE HARRINGTON,
Route 3, Box 107,
Elkhorn, Wis.

Sears, Roebuck and Co.
Gentlemen:—I wish to say that the barn purchased from you and all our dealings in regard to same are very gratifying. I favor the Already Cut method, for it stands to reason that time saved in labor and waste in lumber makes the cost considerably less by your method. I am more than pleased with the lumber.
Thanking you for past favors, I am,
Yours truly,
J. C. LEE,
Waverly, Ohio.

Notes About Foundation Walls of Barns

As a rule you may accept the state laws governing the depth of foundations for other buildings as a pretty sure indication of what is actually required. Some states say 24 inches; others, 30 inches; according to the severity of the Winter. But the frost line alone is not the controlling factor; other considerations such as loose or refilled ground merit consideration and should not be overlooked. It is always practical to go down to the permanent moisture line.

The height of the foundation wall above the established grade line merits your special attention because **your barn** and every other building **will last much longer if you prevent moisture from coming into contact with the sill and the framework of the building.**

In most of our barns we specify the height of the foundation above the grade line to be at least 24 inches. This has proved sufficient to meet ordinary requirements.

The illustrations on pages 3, 4, 5 and 6 convey a fairly good idea of the solid foundations and cross sections. They can be modified to meet particular requirements.

Cement or other foundation material is not included in the prices quoted on any of the buildings shown in this catalog.

The following proportions of cement, sand and crushed stone for concrete are recommended: One part of cement, two and one-half parts of sand, five parts of crushed stone **for foundation walls.** One part of cement, three parts of sand, six parts of crushed stone **for concrete floors in stables, mangers, etc.** One part of cement, one part of sand **for finishing floors, etc.**

As packed by the manufacturer, 1 barrel cement equals 4 sacks, each sack weighs 95 pounds and is equal to about 1 cubic foot.

For a cubic yard of solid concrete the following quantities of cement, sand and gravel or broken stone are required, proportioned as shown above.

	Cement, Cubic Feet	Sand, Cubic Feet	Gravel or Stone, Cubic Feet
Foundations	5	12½	25
Floors	4¼	12¾	25½
Finish	1	1	None

Variation in the fineness of sand and the solid tamping of the concrete may affect the quantities a little in either direction. 1 cubic yard of concrete will yield about 6 lineal feet of foundation wall as shown on page 4, which is 30 inches below and 24 inches above the grade line or about 5 lineal feet of foundation wall as shown on page 5, which is 30 inches below and 4 feet above the grade line, at a cost of approximately 45 cents per lineal foot for cement, figured on a price of $2.25 per barrel of cement.

All prices quoted in this book are for material loaded on the cars at our factory or yards.
Lumber and Mill Work for farm buildings are quoted loaded on the cars at our yards in SOUTHERN ILLINOIS.
Hardware, Paint and other Accessories are quoted loaded on the cars at CHICAGO or PHILADELPHIA.

Index to Barn Catalog

Page

Annex Barns.....25, 28
Bank Barns.....12, 19-21
Driveway Barns.....20-22
Feeder Barns.....24, 26-27
Gothic Roof Barns.....10, 16, 18-19, 29
Gothic Roof Construction.... 6
Sheep Barns.....28
Small Barns.....29
Box Stalls.....46
Corn Cribs 34-35
Doors 44
Eight Good Reasons..... 1
Farm Buildings, "Already Cut" 2
Feed Rack.....45
Floor Plans.....40-42
Flooring Blocks.....39
General Specifications.....3-4
Guarantee...Inside Front Cover
Hardware 50
Hog Crates.....46
Hog Houses.....30-33
The "Colony" Hog House....33
The "Community" Hog House.32
The "Monitor" Hog House...31
The "Sunlight" Hog House...30
The "Wigwam" Hog House..33
Ice Houses.....38
Implement Sheds.....36
Lightning Rods.....43
Milk Houses.....39
Paints 48
Partitions, Etc..... 46-47
Paving Blocks.....39
Poultry Houses.....37
Roofing.....See Colored Insert
Sheds.....25, 36
Silos 49
Timber Frame Construction.. 5
Ventilators 47

"ALREADY CUT" FARM BUILDINGS. REQUIRE NO SAWING. REDUCE LABOR ONE-HALF

No Waste—No Mistakes—No Big Labor Bills

READ THIS ABOUT OUR MACHINE MADE, "ALREADY CUT" MODERN FARM BUILDINGS.

This is the way your material comes when you buy one of our "Already Cut" Modern Farm Buildings:

All Wall Plates
All Girders
All Joists
All Studding
All Ridge Boards
All Plates
All Rafters
All Trusses

} ***"Already Cut" and Fitted, Ready for Nailing***

All Girts and Ribbons
All Braces
All Posts
All Door Frames
All Sash and Window Frames
All Barn Doors, ***ready made.***
All Windows and Sash, ***ready made.***

} ***"Already Cut" and Fitted, Ready for Nailing***

Each and every piece of the above material is **measured, fitted and cut to exact size for you at our factory.** The only work necessary on the job is to nail the pieces in place, following the instructions and plans furnished free with the material. Each piece is plainly marked to show just where it goes in the building. You can readily understand that when all this work is done at our factory, building is a small job. In addition, our price for a complete barn includes Window Shields with all six-light and nine-light windows for ground floor ventilation; seventeen-year guaranteed Fire-Chief Shingle Roll Roofing for all barns (except round barn), complete Hardware, Latches, Hinges, Staples, Nails, etc., and Paint for two coats, your selection of colors.

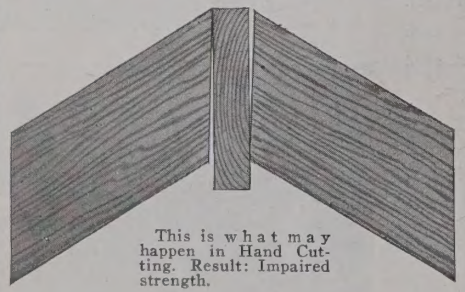

This is what may happen in Hand Cutting. Result: Impaired strength.

We furnish you all the Roof Boards, Barn Boards, Drop Siding, Mow Floor, Sub-Floors, as specified, in lengths that will work out to the best advantage on the job. When you purchase from us you know exactly what you get and how we cut and fit the material.

Our "Already Cut" buildings combine high quality of material, careful design and solid construction.

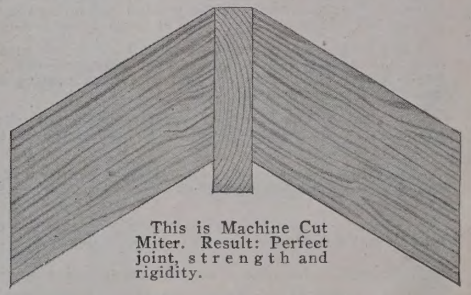

This is Machine Cut Miter. Result: Perfect joint, strength and rigidity.

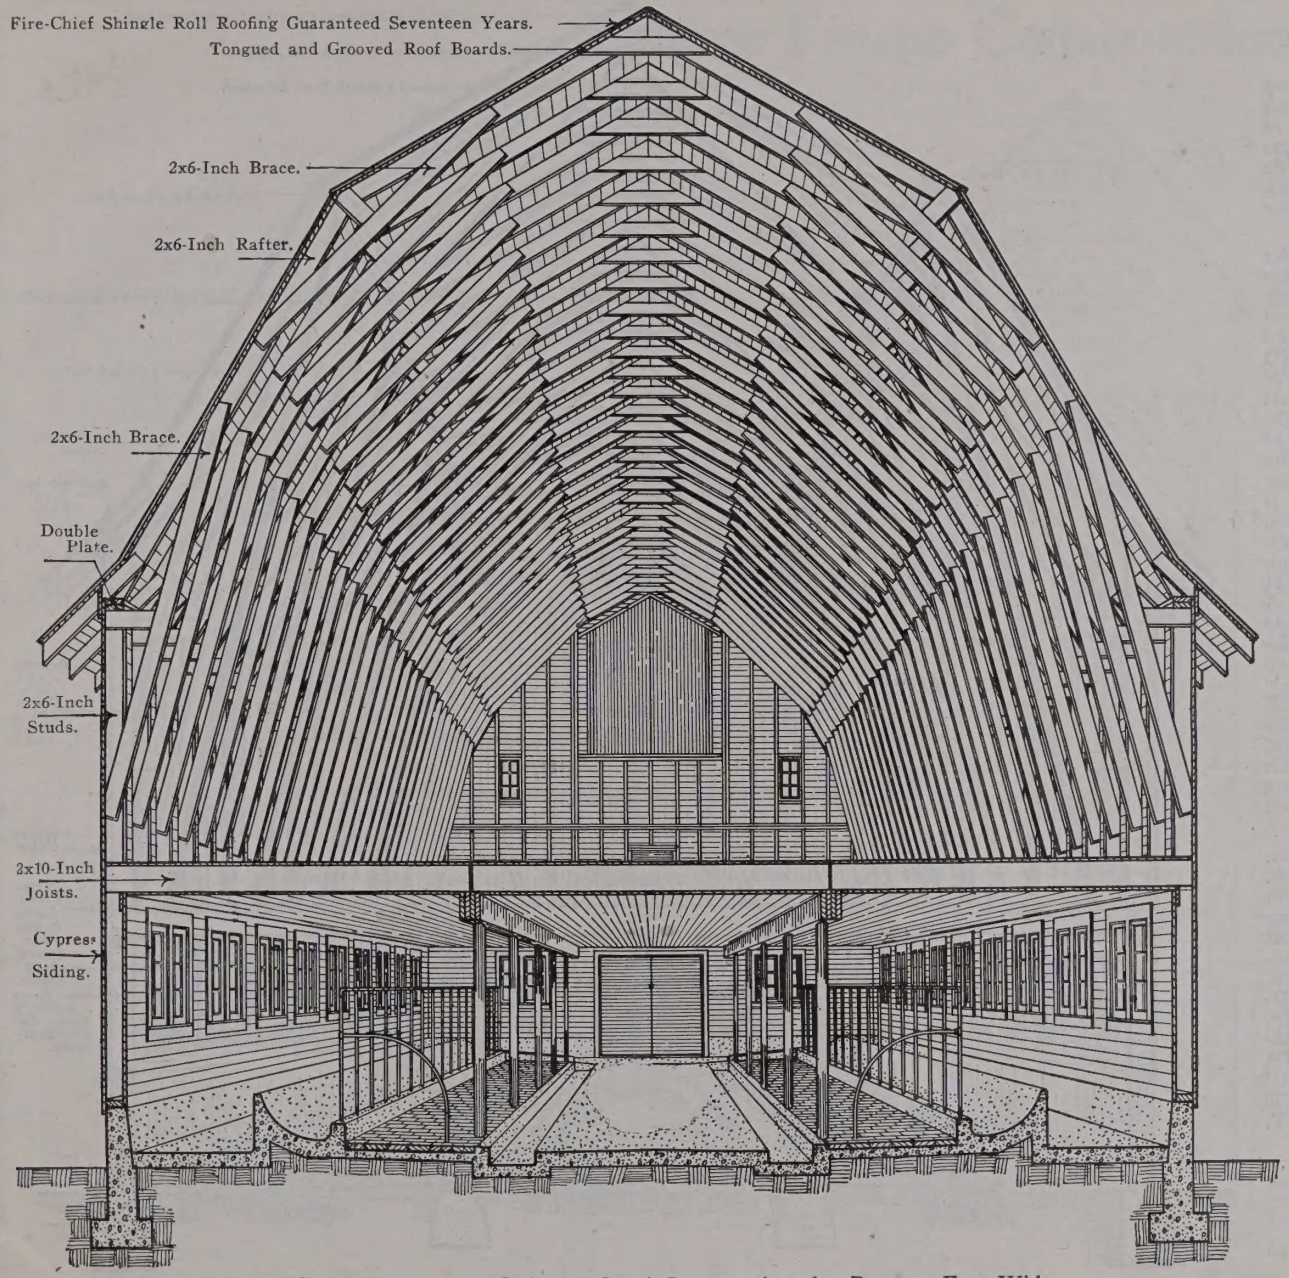

Braced Rafter—or Balloon—Roof Construction, for Barn 36 Feet Wide.
Regarding equipment, inside lining, ceiling, etc., see "Optional Items," page 4.

General Specifications

The illustrations on this and the following page are reproductions of the construction of most of our barns. No words are needed to describe the strength and rigidity of the construction. The illustrations speak for themselves. Equipment, inside lining and ceiling are optional; see page 4.

During our study of barn building we have carefully analyzed the methods of the builders and the requirements of the owners. We learned that four different types of construction are very popular—the **BRACED RAFTER CONSTRUCTION** or, as it is sometimes called, the Balloon Construction; the **TRUSSED ROOF CONSTRUCTION**, the **GOTHIC ROOF CONSTRUCTION** and the **TIMBER FRAME CONSTRUCTION.** The popularity of these types of construction is so great that we did not feel warranted in omitting any of them. On this and the following page we illustrate the Braced Rafter Construction and the Trussed Roof Construction. A good impression of the strength of the Timber Frame Construction and the simplicity of the Gothic Roof Construction will be found on pages 5 and 6.

The same care used in selecting the most suitable types of construction was exercised when we decided on the kind of material to be specified. Prominent barn men agree that **THE FRAME OF THE BARN** should be constructed of the strongest lumber obtainable. Actual experience and statistics of the U. S. Department of Agriculture as well as many other sources prove that **YELLOW PINE IS THE MOST SUITABLE FOR THIS PURPOSE.** Therefore, we have decided to use only No. 1 Yellow Pine for the framework of all our barns in the belief that by this selection we meet actual requirements to the greatest advantage.

The quality of the **LUMBER TO BE USED FOR THE OUTSIDE WALLS** of a barn needs no less attention than the quality of the material used for the frame of the barn. But, while strength of material is the principal feature that governs the selection of the framing lumber, weather resisting qualities are the chief requirements in the selection of the lumber for the outside. We know of no higher quality of weather resisting lumber than that of **CYPRESS, "THE WOOD ETERNAL."** The superiority of cypress over other woods as a weather resisting material is well known. Bulletin No. 272 of the U. S. Department of Agriculture states that Cypress Farm Buildings in excellent preservation after 100 to 200 years and others of a like character are frequently reported.


Drop Siding.

GENERAL SPECIFICATIONS—Continued

We furnish two grades of Cypress Siding: **SELECT GRADE** and **No. 1 COMMON GRADE.**

Select Cypress Siding is our highest quality of Barn Siding and we recommend it highly. No. 1 Common Cypress Siding contains sound knots and other defects. It is favored in many localities for the reason that when it is painted it has the same appearance from the outside as the higher grade siding. Such defects in Cypress in no way impair the long life of the siding. In fact this grade will give double the length of service of even the highest grade of white pine.

A glance at the illustrations of "Drop Siding" and the "Double V Siding" will show you the designs we furnish for the outside walls of our barns. Double V Siding is mostly used on Truss Construction and Drop Siding on Braced Rafter Construction. Complete specifications will be found in the description of each barn. **FOR MOW FLOORING** we furnish **TONGUED AND GROOVED No. 1 YELLOW PINE.** This is superior to plain boards, as it prevents dust from dropping on the stock below. A mow floor not airtight does not permit of good ventilation of the ground floor where the stock is kept. This is of greatest importance. In driveways through the mow floor of bank barns we lay **2-INCH PLANKS ON A TONGUED AND GROOVED YELLOW PINE SUB-FLOORING.** For the roof we furnish tongued and grooved, tight fitting roof boards of Yellow Pine, to be covered with extra heavy **FIRE-CHIEF SHINGLE ROLL ROOFING, GUARANTEED BY US FOR SEVENTEEN YEARS FOR WEAR AND COLOR.** Approved by National Board of Fire Underwriters. This gives you a dustproof, rainproof, snowproof and fire resisting roof. (See description of Fire-Chief Roofing on colored insert opposite page 1.)

"Double V Siding."

For a full description of our Doors, Hardware and Paint, refer to pages 44, 47, 48 and 50. A careful study of these details will convince you that in placing your order with us you are assured of getting your full money's worth. Remember, we are not trying to sell the lowest priced barn, but one of the highest quality of material and sound construction at the smallest outlay of money—quality considered. ONLY OUR GREAT RESOURCES AND OUR BUILDING EXPERIENCE ENABLES US TO QUOTE THE VERY LOW PRICES IN THIS CATALOG. REMEMBER, **THAT EVERY PIECE OF FRAMING LUMBER YOU RECEIVE FOR YOUR BARN IS "ALREADY CUT" AND FITTED AND THAT YOU GET COMPLETE PLANS SHOWING EXACTLY WHERE IT WILL FIT,** on receipt of order.

Optional Items.

On account of difference in requirements and arrangement of floor plans, we have **NOT INCLUDED** the following items in our catalog prices:

Ventilators and Cupolas.

Ventilating Systems.

Material for ground floors, because it may be desired to make them of concrete.

Inside Lining of the ground floor and ceiling.

Barn Equipment, such as stalls, partitions, bins, hay racks, hay carriers.

Special prices for such items will be quoted on application.

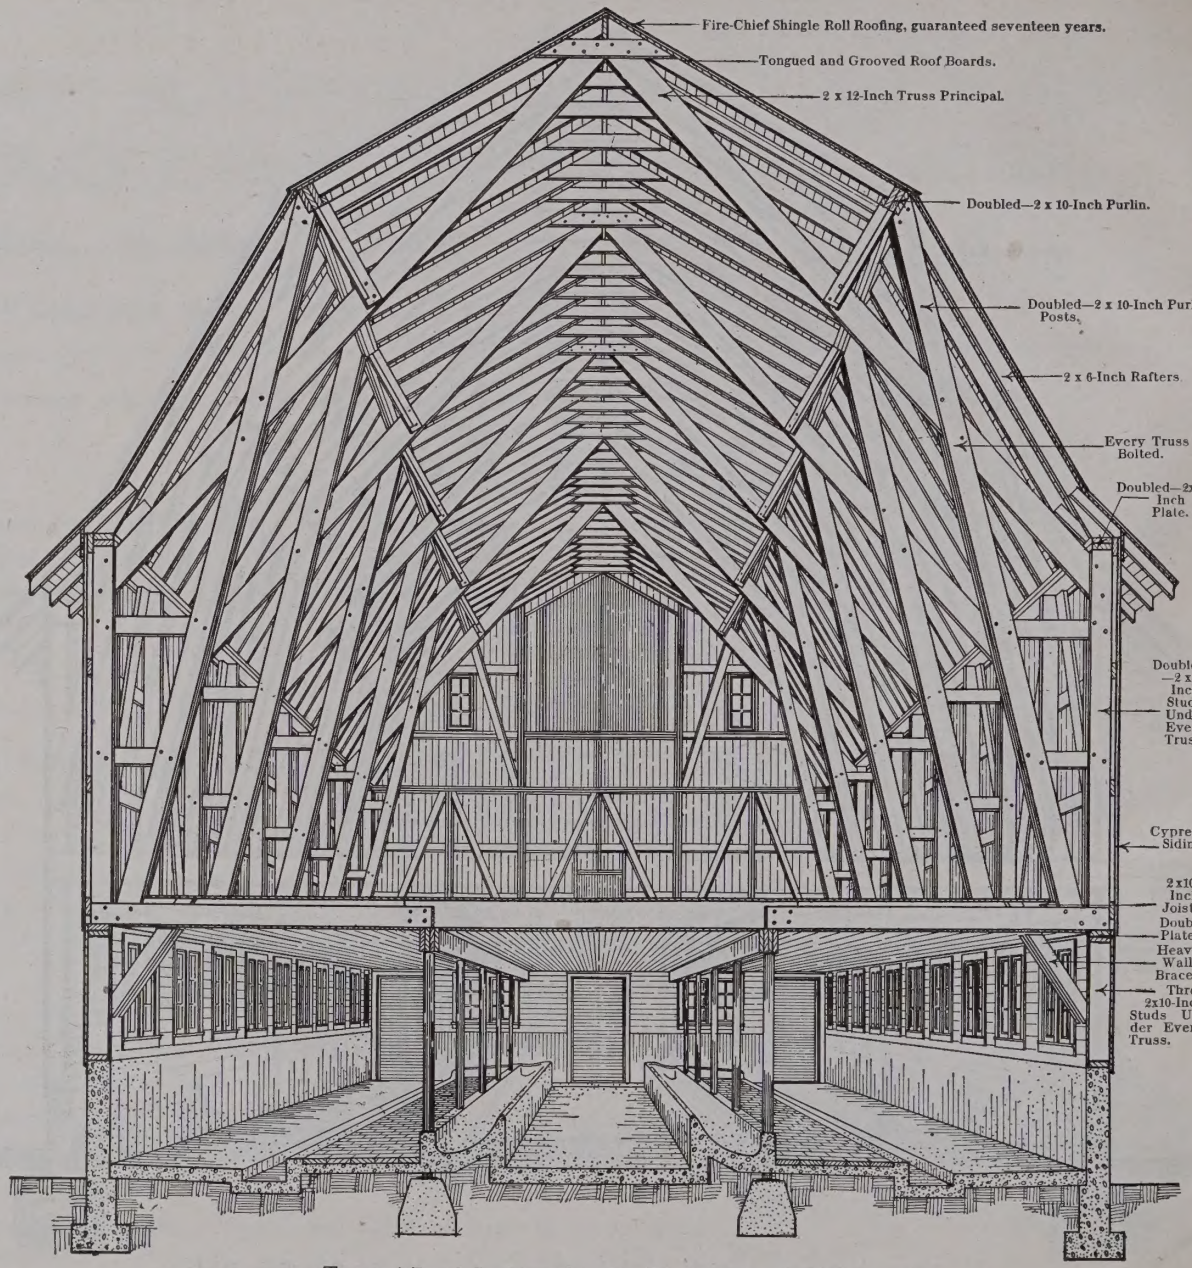
Fire-Chief Shingle Roll Roofing, guaranteed seventeen years.
Tongued and Grooved Roof Boards.
2 x 12-Inch Truss Principal.
Doubled—2 x 10-Inch Purlin.
Doubled—2 x 10-Inch Purlin Posts.
2 x 6-Inch Rafters.
Every Truss Bolted.
Doubled—2x8 Inch Plate.
Doubled—2 x 8-Inch Studs Under Every Truss.
Cypress Siding.
2x10-Inch Joists.
Double Plate.
Heavy Wall Braces.
Three 2x10-Inch Studs Under Every Truss.

Trussed Roof Construction for Barn 36 Feet Wide.
Regarding equipment, inside lining, ceiling, etc., see "Optional Items" to the left.

Timber Frame Construction

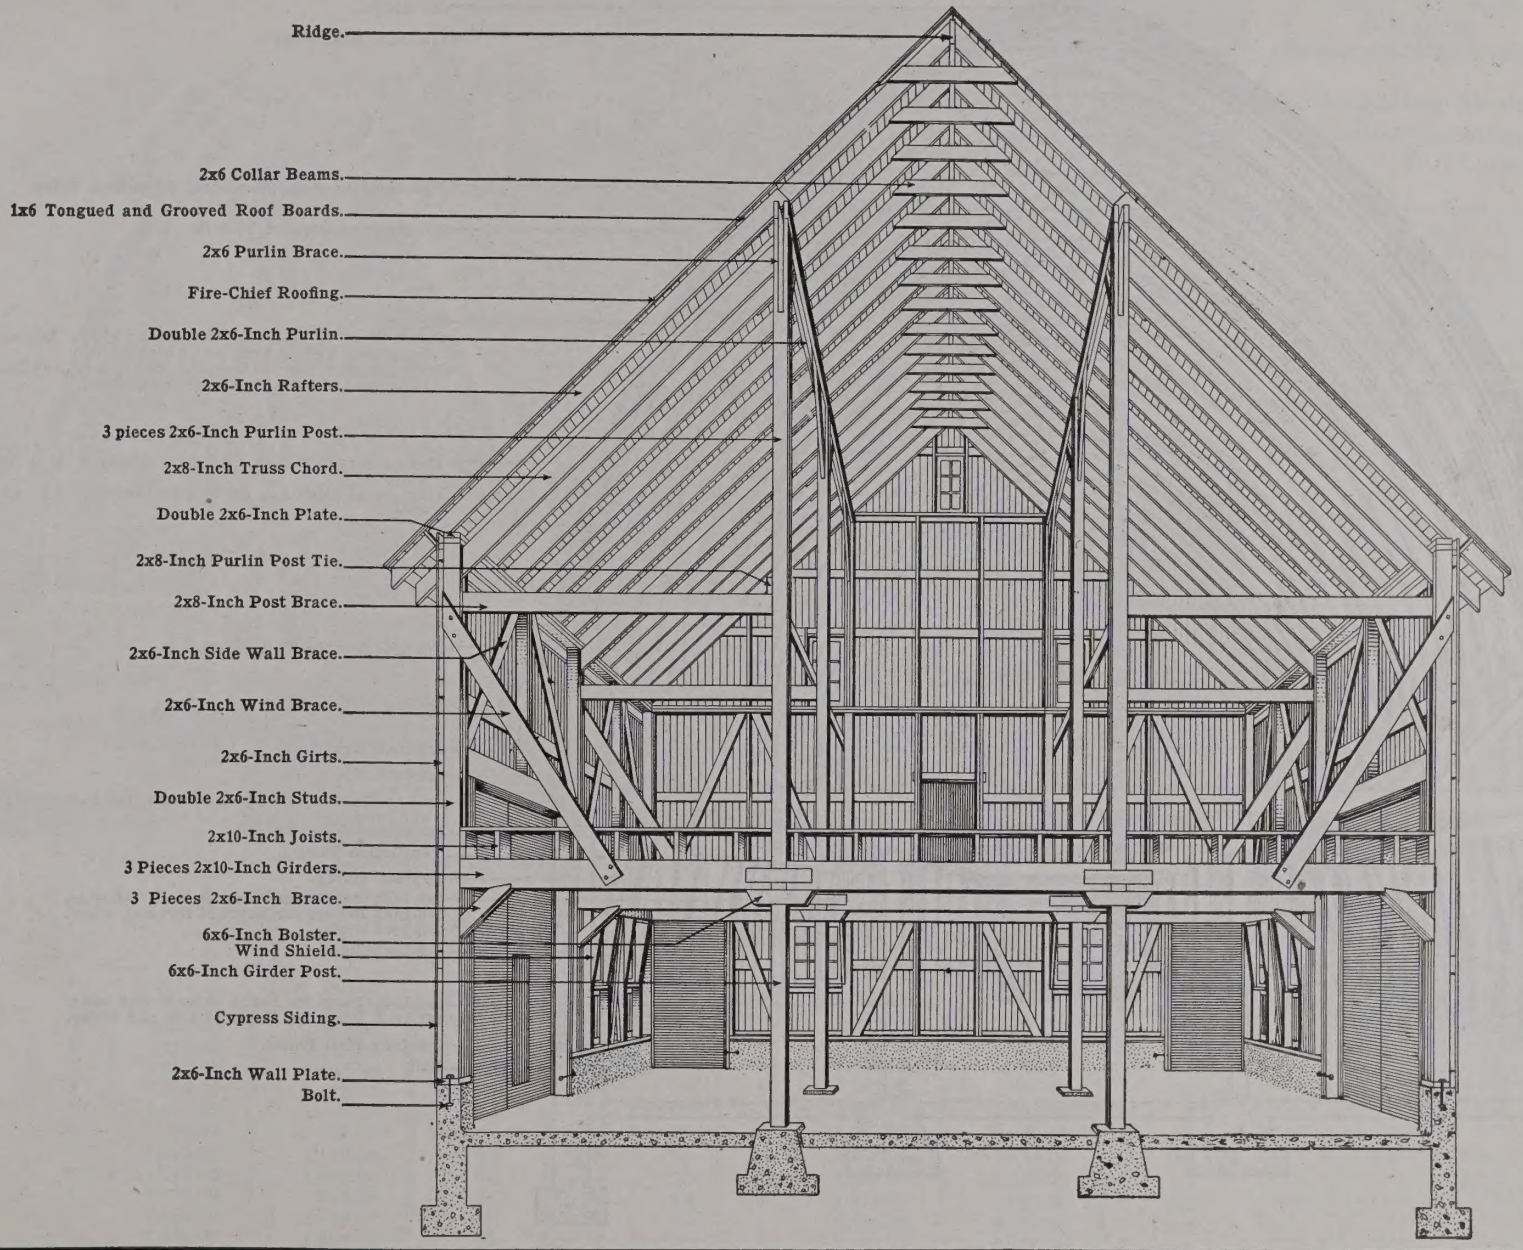

GOTHIC ROOF CONSTRUCTION

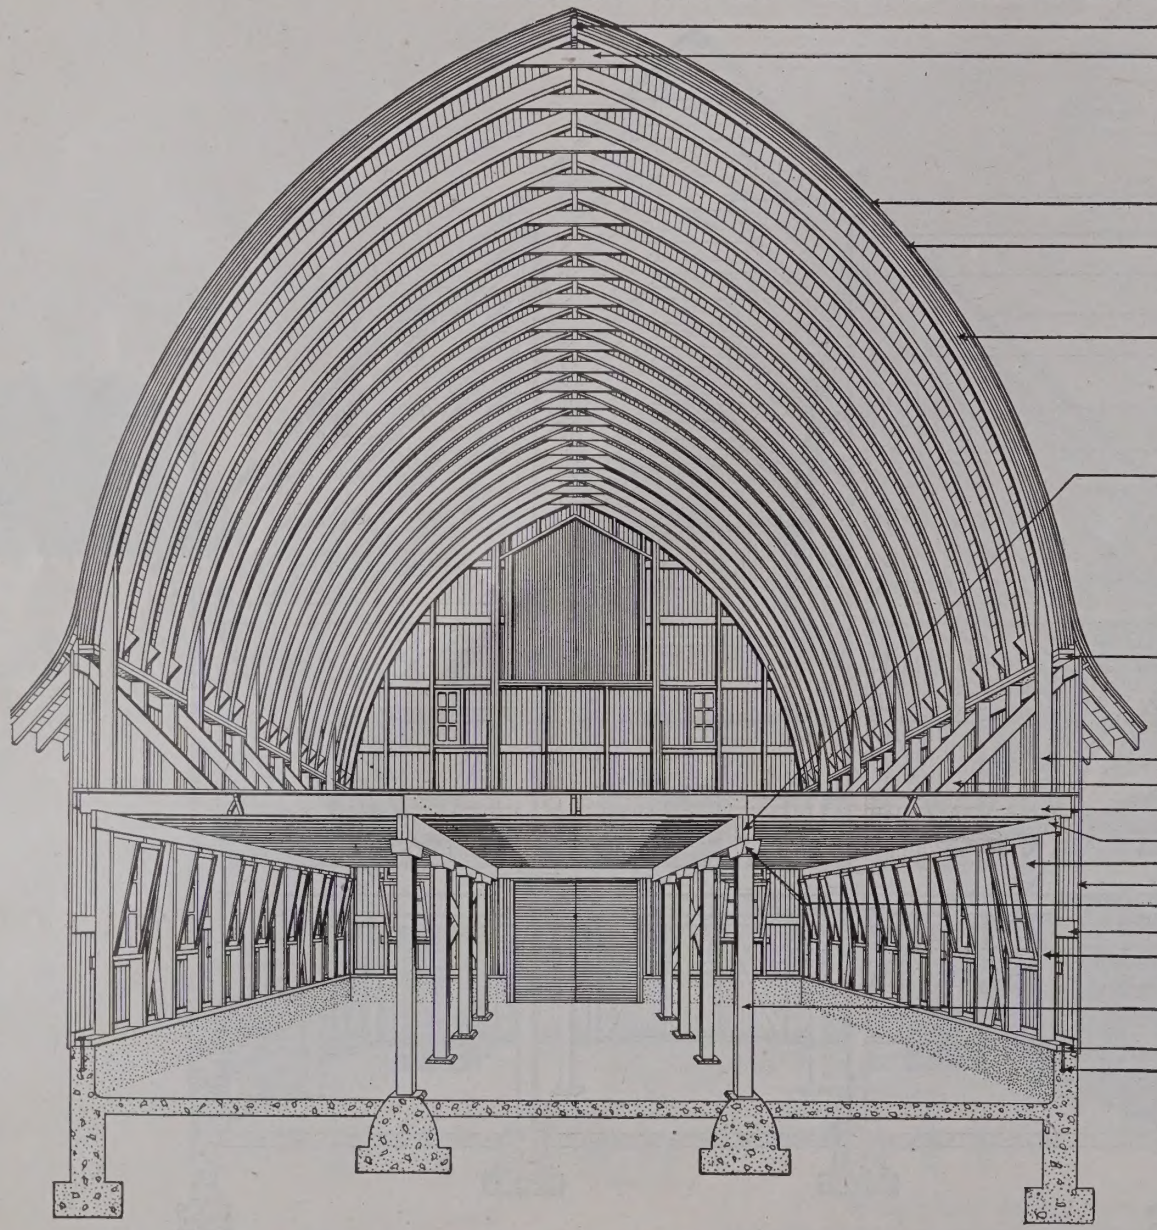

2x8 Ridge.

2x6-Inch Collar Beams.

Fire-Chief Roofing, Guaranteed Seventeen Years.

Tongued and Grooved Roof Board.

Rafters.
Barns 24 to 28 feet wide have four pieces 1x3-inch Long Leaf Yellow Pine 2 feet on centers.
Barns 30 feet and wider have five pieces 1x4-Inch Long Leaf Yellow Pine 2 feet on centers.

Three pieces 2x10-Inch Girder for Barns 24 to 32 feet wide.
Four pieces 2x10-Inch Girders for Barns 34 feet and wider.

2x6-Inch Double Wall Plates.

2x6-Inch Roof Ties.

2x6-Inch Brace.

2x10-Inch Joists, 18-inch on centers, for Barns 30 feet and wider.

2x6-Inch Ribbon.

Ventilation Shields.

Cypress Siding.

6x6-Inch Bolster for Barns 24 to 32 feet wide.
6x8-Inch Bolster for Barns 34 feet and wider.

2x6-Inch Girts.

2x6-Inch Studs.

6x6-Inch Posts for Barns 24 to 32 feet wide.
6x8-Inch Posts for Barns 34 feet and wider.

2x6-Inch Wall Plates.

Bolt.

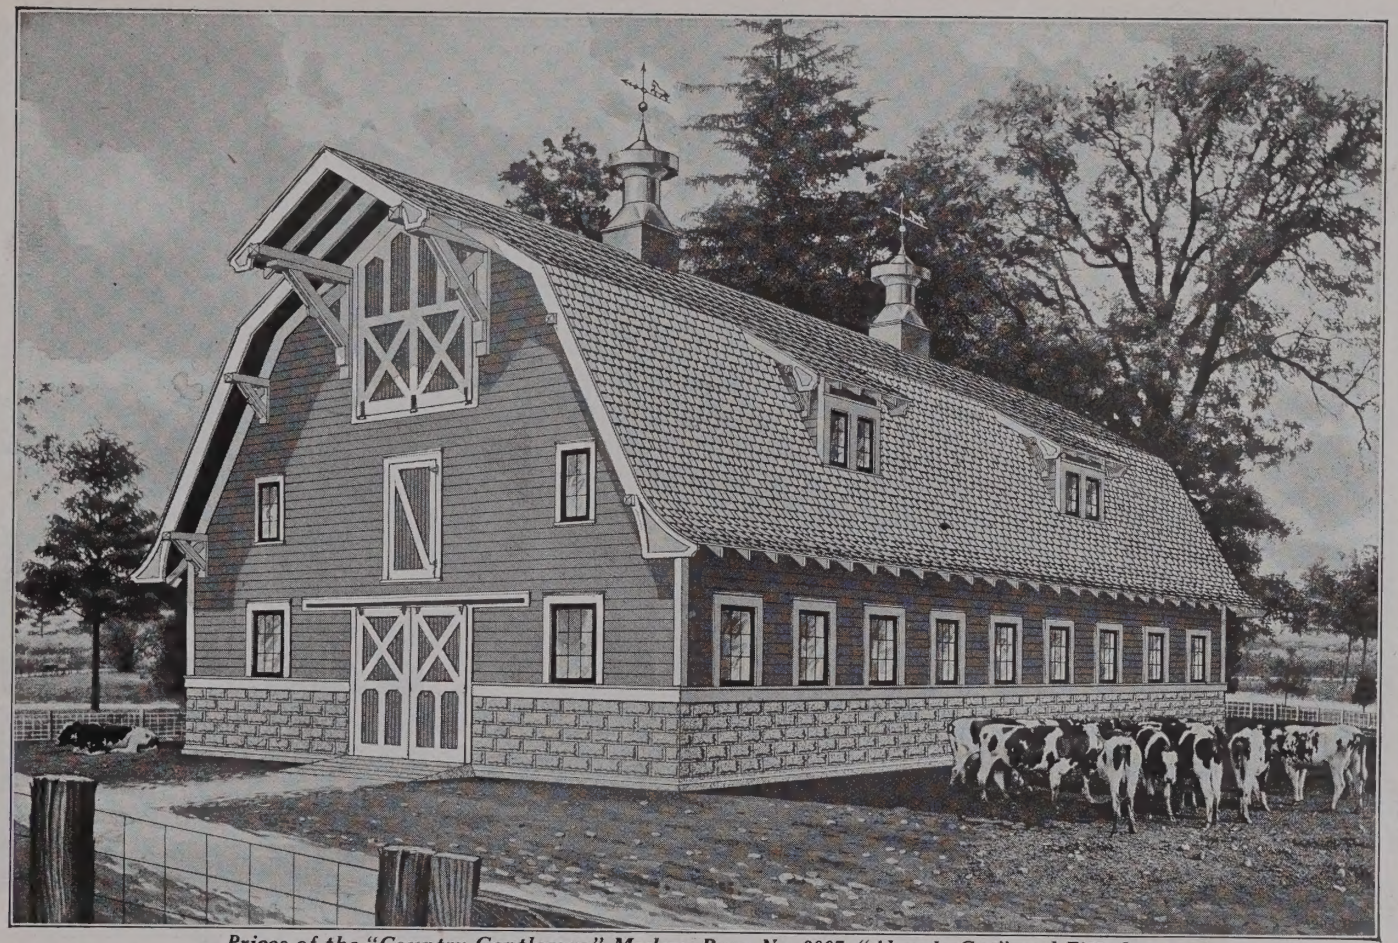

ALREADY CUT AND FITTED PRICE $831.00 AND UP

An Imposing Modern Barn, Braced Rafter Construction, "Already Cut" and Fitted

THERE is a quiet charm about this modern farm building. It represents the approved type of American barn architecture, and it well deserves its name, the "Country Gentleman."

For the dairyman, for the horseman, or for mixed farming, this building is equally useful. It is designed to meet modern sanitary requirements and to permit of convenience in doing the daily work.

This barn is to be erected on a foundation of concrete or masonry extending 4 feet above the grade level. The ceiling height is 8 feet 6 inches.

Framing lumber is of No. 1 Yellow Pine.

The outside walls are sided with drop siding of Cypress, "The Wood Eternal." This secures a strong and weather resisting building.

To make the roof good and strong we furnish tight fitting tongued and grooved sheathing boards to be laid on the rafters and covered with Fire-Chief Shingle Roll Roofing, guaranteed by us for seventeen years. It resembles painted shingles.

Barns up to 44 feet long have one dormer on each side.

Barns 50 to 68 feet long have two dormers on each side.

Barns over 68 feet long have three dormers on each side.

Doors are made of Clear Cypress, "The Wood Eternal." Ground floor doors and the double hay door in the front gable slide on Roll Rite Hangers, the best hangers we handle. A smaller hinged door on the mow floor level is convenient for many purposes. All doors are **"ready made,"** ready to hang in place, and are superior to those produced by hand carpentry.

Large windows, 1⅜ inches thick, with nine lights, are provided for the ground floor. Opening size of windows is 2 feet 8 inches by 3 feet 6 inches. Ventilation shields are furnished. A quick change of air can be made by lifting the windows back into the shields. The practical construction of the shields protects your stock from direct drafts.

Hardware, such as latches, bolts, screws, nails, etc., is included in the price, also sufficient **paint for two coats,** oxide red for the body and white for the trim. You may select other combinations from our paint page. (See page 48.) Ventilating systems, cupolas, barn equipment and foundation material are not included in the price.

Floor Plans. See pages 40 to 42 for sample floor plan arrangements. **Be sure to specify number of the floor plan that best suits your requirements.** Use the enclosed sketch sheet to outline your needs when changes are necessary and return for quotation on equipment.

Our "already cut" feature, together with **"ready made"** doors, sash, etc., furnished at the prices quoted, make it possible for you to erect this modern barn at a remarkable saving of time and labor. Free building plans, which are easy to understand, are furnished with every order.

You will appreciate the value, beauty, economy and convenience of this strong and sanitary modern barn.

Prices of the "Country Gentleman" Modern Barn No. 3007, "Already Cut" and Fitted.

SIZE OF BARN		Height From Sill to Eaves, Feet	PRICE OF BARN			SIZE OF BARN		Height From Sill to Eaves, Feet	PRICE OF BARN		
Width, Feet	Length, Feet		With No. 1 Common Cypress Siding	With Select Cypress Siding	Haymow, Capacity in Tons	Width, Feet	Length, Feet		With No. 1 Common Cypress Siding	With Select Cypress Siding	Haymow, Capacity in Tons
32	32	8	$ 831.00	$ 855.00	32	34	80	8	$1,692.00	$1,732.00	88
32	38	8	931.00	957.00	38	36	38	8	1,030.00	1,065.00	45
32	44	8	1,031.00	1,058.00	44	36	44	8	1,142.00	1,175.00	51
32	50	8	1,131.00	1,159.00	50	36	50	8	1,252.00	1,286.00	58
32	56	8	1,231.00	1,261.00	56	36	56	8	1,363.00	1,400.00	65
32	62	8	1,332.00	1,363.00	62	36	62	8	1,472.00	1,509.00	72
32	68	8	1,431.00	1,465.00	68	36	68	8	1,582.00	1,622.00	79
34	38	8	970.00	999.00	42	36	74	8	1,693.00	1,734.00	86
34	44	8	1,072.00	1,110.00	48	36	80	8	1,804.00	1,845.00	93
34	50	8	1,177.00	1,209.00	55	36	86	8	1,914.00	1,957.00	100
34	56	8	1,279.00	1,314.00	61	36	92	8	2,025.00	2,069.00	107
34	62	8	1,383.00	1,418.00	69	36	98	8	2,135.00	2,180.00	114
34	68	8	1,486.00	1,523.00	75	36	104	8	2,245.00	2,292.00	121
34	74	8	1,589.00	1,628.00	81						

"Already Cut" and Fitted.

ALREADY CUT AND FITTED PRICE **$946.00 AND UP**

A Modern Dairy Barn, Braced Rafter Type With Drop Siding.

NO dark corners in this Dairy Barn. Many long windows provide an abundance of light. Right here the first requirement of sanitation in a dairy barn has been carefully considered. The windows are equipped with ventilation shields; a quick change of air may be made by lifting windows back into these shields. No direct draft touches your stock. The arrangement of the ventilation shields protects them.

Sanitary steel columns with base and cap, for the support of the main girders, are furnished. These are the best columns for dairy barns.

This barn is constructed in the Braced Rafter Type (for full details see page 3). Height of ground floor, 8 feet 6 inches.

The framing lumber for this barn is No. 1 Yellow Pine.

The outside walls are covered with drop siding of Cypress, "The Wood Eternal." This combination secures a very strong frame and outside walls that will last a lifetime.

For the roof of the barn we furnish **tight fitting tongued and grooved sheathing boards** on which is to be laid **Fire-Chief Shingle Roll Roofing. Fire-Chief Roofing** is guaranteed by us for **seventeen years.** It resembles painted shingles.

Barns up to 44 feet long have one dormer on each side.

Barns 50 to 68 feet long have two dormers on each side.

Barns over 68 feet long have three dormers on each side.

All doors in this barn are **"ready made"**—ready to hang in place and are superior to doors produced by hand carpentry. The doors on the ground floor are of double thickness. These doors and the hay door slide on Roll Rite Hangers, the highest priced hangers we handle. The smaller hinged door at the mow level will be found of great advantage.

Hardware, such as latches, bolts, nails, etc., is included in the above price. Sufficient **paint for two coats is furnished,** oxide red for the body and white for the trim. You may select any other combination from our paint page (see page 48). Foundation material, ventilating systems, cupolas, barn equipment and silos are not included in the price.

Our "already cut" feature, together with **"ready made"** doors, sash, etc., furnished at the prices quoted, enable you to build this barn at a big saving of time and labor. Free building plans, easy to understand, are furnished with each order.

Floor Plans. See pages 40 to 42 for sample floor plan arrangements. **Be sure to specify number of the floor plan that best suits your requirements.** Use the enclosed sketch sheet to outline your needs when changes are necessary and return for quotation on equipment. **Be sure to give size when ordering.**

QUALITY GUARANTEED

Prices of the "Pride of the Farmstead" Modern Dairy Barn No. 2054 "Already Cut" and Fitted.

SIZE OF BARN			PRICE OF BARN			SIZE OF BARN			PRICE OF BARN		
Width, Feet	Length, Feet	Height From Sill to Eaves, Feet	With No. 1 Common Cypress Siding "Already Cut" and Fitted.	With Select Cypress Siding "Already Cut" and Fitted.	Haymow Capacity in Tons	Width, Feet	Length, Feet	Height From Sill to Eaves, Feet	With No. 1 Common Cypress Siding "Already Cut" and Fitted.	With Select Cypress Siding "Already Cut" and Fitted.	Haymow Capacity in Tons
30	32	12	$ 946.00	$ 988.00	31	34	74	16	$1,949.00	$2,031.00	106
30	38	12	1,064.00	1,117.00	37	34	86	16	2,211.00	2,296.00	123
30	44	12	1,181.00	1,235.00	43	34	98	16	2,469.00	2,561.00	140
30	50	12	1,301.00	1,350.00	49	34	110	16	2,726.00	2,828.00	157
32	32	14	1,000.00	1,049.00	37	36	38	16	1,226.00	1,284.00	61
32	38	14	1,124.00	1,176.00	44	36	44	16	1,360.00	1,423.00	70
32	44	14	1,249.00	1,303.00	52	36	50	16	1,494.00	1,560.00	80
32	50	14	1,370.00	1,402.00	59	36	56	16	1,627.00	1,698.00	90
32	56	14	1,492.00	1,557.00	66	36	62	16	1,744.00	1,825.00	99
32	62	14	1,615.00	1,683.00	73	36	74	16	2,029.00	2,112.00	118
34	38	16	1,173.00	1,235.00	54	36	86	16	2,296.00	2,387.00	138
34	44	16	1,310.00	1,367.00	63	36	98	16	2,564.00	2,663.00	157
34	50	16	1,438.00	1,500.00	71	36	110	16	2,831.00	2,945.00	176
34	56	16	1,567.00	1,632.00	80	36	122	16	3,099.00	3,216.00	195
34	62	16	1,695.00	1,764.00	89	36	146	16	3,635.00	3,766.00	234

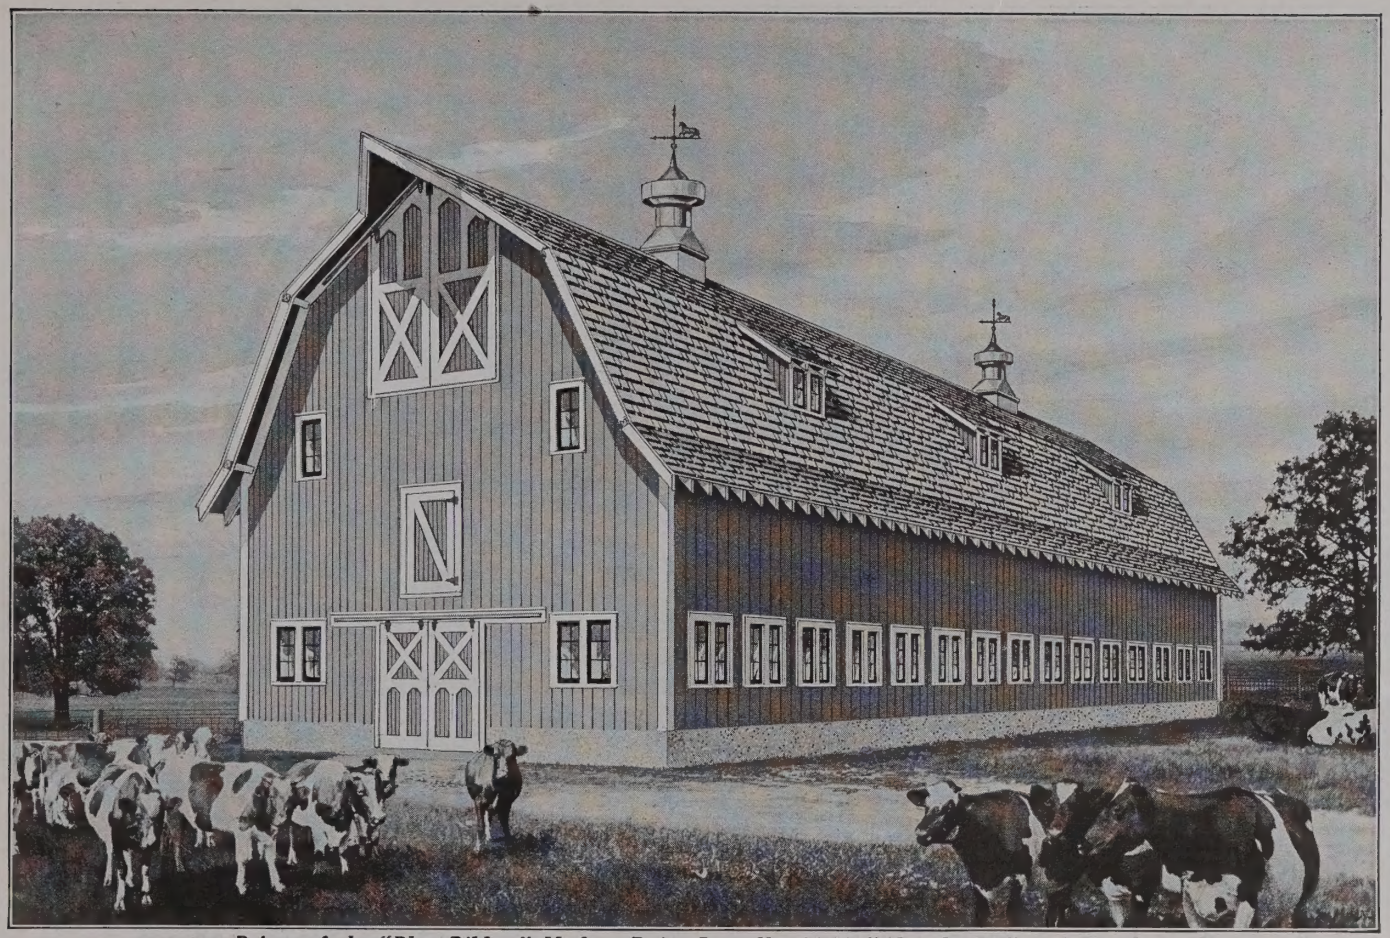

ALREADY CUT AND FITTED PRICE $1,123.00= AND UP

A Modern Dairy Barn of Trussed Roof Construction, With Vertical Siding.

THIS Modern Dairy Barn is designed to meet the requirements of those who prefer the Trussed Roof Construction. (See page 4.) This barn has abundance of long windows which provide plenty of light and air for the ground floor. The windows are equipped with ventilation shields. A quick change of air can be made by lifting the windows back into the shields. No direct draft touches your stock. The arrangement of the ventilation shields protects them. Care has been taken to work out these essentials of light and air to obtain the most sanitary conditions for this Dairy Barn. Our arrangement meets all requirements. Height of ground floor, 8 feet 6 inches.

Sanitary Steel Columns with base and cap for the support of the main girders, are also provided.

The framing lumber for this barn is No. 1 Yellow Pine. All trusses are to be bolted together. For the outside walls vertical siding of the double V pattern of Cypress, "The Wood Eternal," is furnished. This combination secures a very strong frame and outside walls that will withstand the weather for a lifetime.

Realizing that the roof of a barn being hard to get at is, therefore, the most neglected, we furnish **tight fitting, tongued and grooved sheathing boards** to cover the rafters and **Fire-Chief Shingle Roll Roofing. Fire-Chief Roofing** is guaranteed by us for **seventeen years.** It resembles painted shingles.

Barns up to 42 feet long have one dormer on each side.

Barns 56 to 70 feet long have two dormers on each side

Barns over 70 feet long have three dormers on each side.

The doors are "ready made"—ready to hang in place and are superior to those produced by hand carpentry. The doors on the first floor are of **double** thickness. The doors on the first floor, also the hay door in the front gable, slide on Roll Rite Hangers, the highest priced hangers we handle. Consider the advantage of the little hinged door at the mow level.

Hardware, such as latches, bolts, nails, etc., is included in the above price. Sufficient **paint for two coats** is furnished, oxide red for the body and white for the trim. You may select any other combination from our paint page. (See page 48.) Ventilating systems, cupolas, barn equipment, silos, etc., are not included in the price.

Our "already cut" feature, together with factory **"ready made"** doors, sash, etc., furnished at the prices quoted, make it possible for you to build this high class Dairy Barn at a remarkable saving of time and labor.

Floor Plans. See pages 40 to 42 for sample floor plan arrangements. **Be sure to specify number of the floor plan that best suits your requirements.** Use the enclosed sketch sheet to outline your needs when changes are necessary and return for quotation on equipment.

QUALITY GUARANTEED

Prices of the "Blue Ribbon" Modern Dairy Barn No. 2055, "Already Cut" and Fitted.

SIZE OF BARN			PRICE OF BARN			SIZE OF BARN			PRICE OF BARN		
Width, Feet	Length, Feet	Height, From Sill to Eaves, Feet	With No. 1 Common Cypress Siding	With Select Cypress Siding	Haymow, Capacity in Tons	Width, Feet	Length, Feet	Height From Sill to Eaves, Feet	With No. 1 Common Cypress Siding	With Select Cypress Siding	Haymow, Capacity in Tons
30	42	12	$1,123.00	$1,168.00	38	34	98	16	$2,475.00	$2,576.00	132
30	56	12	1,379.00	1,425.00	50	34	112	16	2,769.00	2,876.00	151
30	70	12	1,626.00	1,678.00	84	34	126	16	3,062.00	3,178.00	170
32	42	14	1,204.00	1,255.00	50	34	140	16	3,354.00	3,479.00	189
32	56	14	1,473.00	1,531.00	67	36	42	16	1,343.00	1,407.00	63
32	70	14	1,740.00	1,806.00	84	36	56	16	1,642.00	1,716.00	84
32	84	14	2,010.00	2,080.00	100	36	70	16	1,945.00	2,027.00	105
32	98	14	2,278.00	2,357.00	117	36	84	16	2,245.00	2,335.00	126
34	42	16	1,304.00	1,368.00	57	36	98	16	2,546.00	2,646.00	147
34	56	16	1,562.00	1,670.00	76	36	112	16	2,912.00	2,955.00	168
34	70	16	1,879.00	1,972.00	95	36	126	16	3,149.00	3,265.00	189
34	84	16	2,183.00	2,275.00	114	36	140	16	3,450.00	3,575.00	210

"Already Cut" and Fitted.

ALREADY CUT AND FITTED PRICE $579.00 AND UP

A Modern Barn With Gothic Roof Construction "Already Cut" and Fitted.

OUR "Cyclone" Barn combines good appearance with strong construction and ample storage capacity. It offers great resistance to wind pressure and is designed principally for such sections of the country where storms and high winds are frequent. It may be used with equal advantage as a dairy barn, a horse barn or a barn for mixed stock. The barn should be erected on a 2-foot foundation of concrete or masonry. The height of the ground floor is 8 feet 6 inches. It has a solid and spacious mow floor above, made of tongued and grooved No. 1 Yellow Pine flooring, which will also keep the stable below free from dust and drafts.

All framing lumber is of No. 1 Yellow Pine.

The outside walls are covered with double V pattern vertical siding of Cypress, "The Wood Eternal." This combination secures a very strong frame and outside walls that will withstand the weather for a lifetime.

The roof arches are good and strong, easy to build up, and provide an unobstructed mow. The arches are to be covered with tight fitting tongued and grooved sheathing boards which we furnish, over which is to be laid **Fire-Chief Shingle Roll Roofing. Fire-Chief Roofing** is guaranteed by us for seventeen years. It resembles painted shingles.

Doors are made of Clear Cypress, "The Wood Eternal." Ground floor doors slide on Roll Rite Hangers, the highest priced hangers we handle. The haymow door has three extra heavy strap hinges. A smaller door on the mow floor level is convenient for many purposes. All doors are **"ready made"**—ready to hang in place and are superior to those produced by hand carpentry.

Large windows, 1⅜ inches thick, with nine lights, are liberally provided for the ground floor. Opening size of windows is 32x42 inches. Ventilation shields are furnished. A quick change of air can be made by lifting the windows back into the shields. The practical construction of the shields protects your stock from direct drafts.

For barns 24 feet wide we furnish a single door at the corners instead of the driveway doors in the center.

Hardware, such as latches, bolts, screws, nails, etc., is included in the price, also sufficient **paint for two coats,** oxide red for the body and white for the trim. You may select other combinations from our paint page (see page 48). Ventilating systems, cupolas, barn equipment, silos, foundation material, etc., are not included in the price.

Floor Plans. See pages 40 to 42 for sample floor plan arrangements. **Be sure to specify number of the floor plan that best suits your requirements.** Use the enclosed sketch sheet to outline your needs when changes are necessary and return for quotation on equipment.

Be sure to notice that all our framing lumber **is** "already cut" and fitted, that our doors are all **made and ready to hang,** and that our roofing is guaranteed for seventeen years. **Take no substitute for Cypress Siding.**

QUALITY GUARANTEED

Prices of the "Cyclone" Modern Barn No. 3026, "Already Cut" and Fitted.

SIZE OF BARN			PRICE OF BARN		HAYMOW Capacity in Tons, About	SIZE OF BARN			PRICE OF BARN		HAYMOW Capacity in Tons, About
Width, Feet	Length, Feet	Height From Sill to Eaves, Feet	With No. 1 Common Cypress Siding	With Select Cypress Siding		Width, Feet	Length, Feet	Height From Sill to Eaves, Feet	With No. 1 Common Cypress Siding	With Select Cypress Siding	
24	24	8	$ 579.00	$ 602.00	14	34	68	8	$1,794.00	$1,837.00	78
24	32	8	721.00	746.00	16	34	74	8	1,919.00	1,965.00	85
24	38	8	804.00	829.00	19	34	86	8	2,170.00	2,218.00	98
24	44	8	884.00	916.00	22	34	98	8	2,421.00	2,471.00	110
24	50	8	966.00	998.00	25	34	110	8	2,672.00	2,724.00	123
28	32	8	840.00	869.00	22	36	38	8	1,208.00	1,249.00	50
28	38	8	899.00	967.00	26	36	44	8	1,352.00	1,381.00	57
28	44	8	1,036.00	1,066.00	30	36	50	8	1,467.00	1,514.00	65
28	50	8	1,130.00	1,163.00	34	36	56	8	1,597.00	1,645.00	72
28	56	8	1,228.00	1,263.00	38	36	62	8	1,718.00	1,777.00	79
30	32	8	892.00	925.00	25	36	68	8	1,847.00	1,928.00	86
30	38	8	997.00	1,061.00	30	36	80	8	2,106.00	2,175.00	100
30	44	8	1,100.00	1,167.00	35	36	92	8	2,362.00	2,438.00	114
30	50	8	1,205.00	1,272.00	40	36	104	8	2,624.00	2,701.00	128
30	56	8	1,310.00	1,377.00	45	36	116	8	2,866.00	2,963.00	142
30	62	8	1,368.00	1,477.00	50	36	128	8	3,144.00	3,229.00	156
32	32	8	955.00	991.00	27	36	140	8	3,404.00	3,494.00	170
32	38	8	1,069.00	1,107.00	32	40	44	8	1,495.00	1,551.00	56
32	44	8	1,183.00	1,223.00	37	40	50	8	1,636.00	1,691.00	64
32	50	8	1,299.00	1,339.00	42	40	56	8	1,775.00	1,832.00	70
32	56	8	1,413.00	1,458.00	47	40	62	8	1,916.00	1,972.00	76
32	62	8	1,527.00	1,573.00	52	40	68	8	2,053.00	2,114.00	83
32	68	8	1,641.00	1,690.00	57	40	74	8	2,195.00	2,253.00	90
32	80	8	1,746.00	1,807.00	62	40	80	8	2,334.00	2,371.00	96
34	38	8	1,166.00	1,205.00	42	40	92	8	2,614.00	2,676.00	110
34	44	8	1,294.00	1,333.00	50	40	104	8	2,894.00	2,958.00	124
34	50	8	1,417.00	1,459.00	57	40	116	8	3,090.00	3,238.00	138
34	56	8	1,543.00	1,585.00	64	40	128	8	3,450.00	3,520.00	152
34	62	8	1,668.00	1,712.00	71	40	140	8	3,730.00	3,801.00	167

"Already Cut" and Fitted.

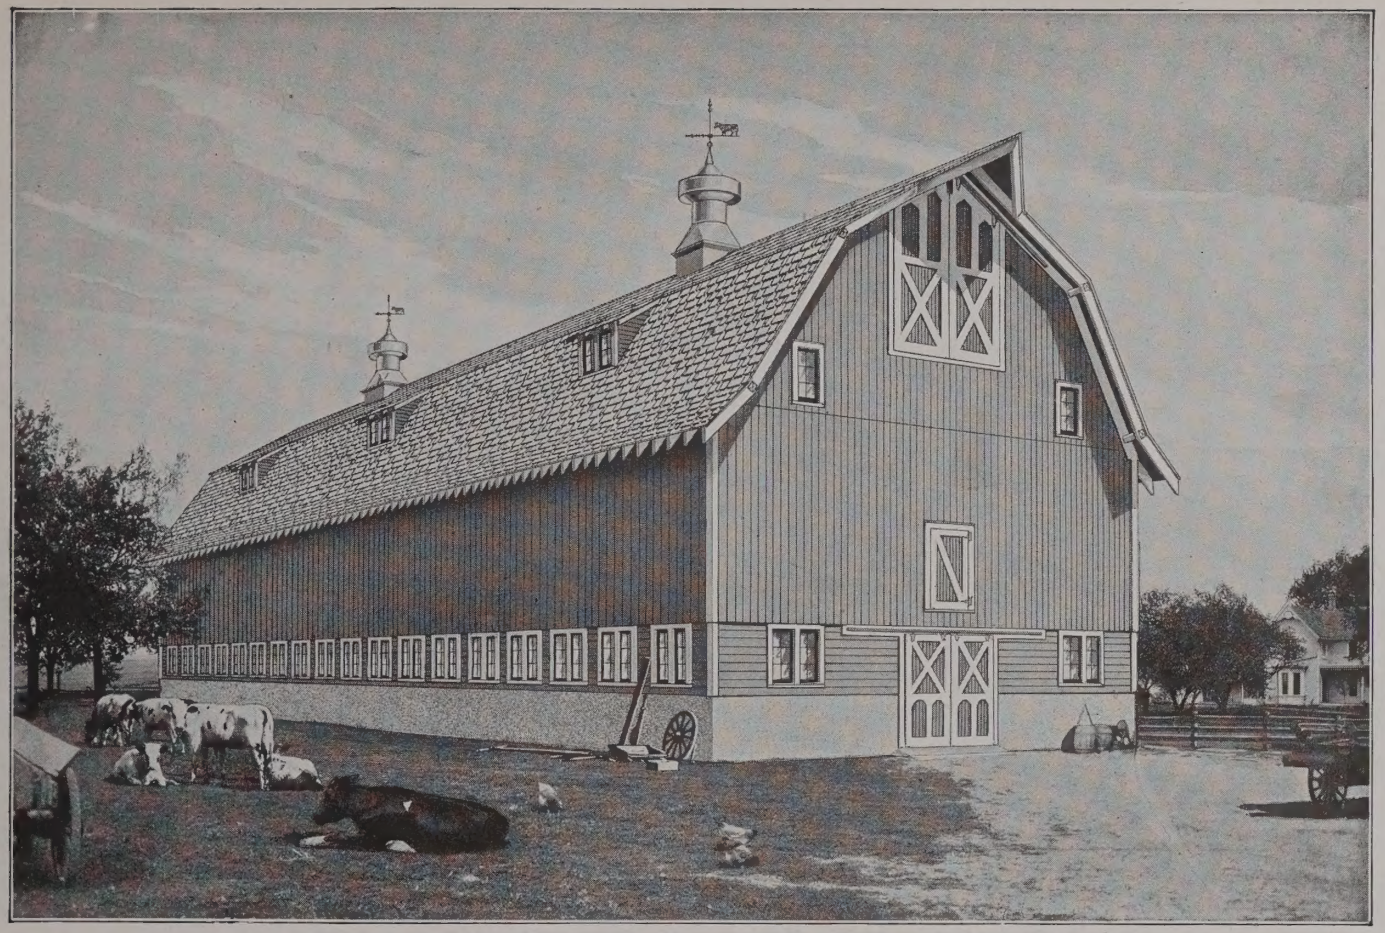

ALREADY CUT AND FITTED PRICE $1,248.00 AND UP

A Modern Dairy Barn, With Extra Large Haymow Capacity, Trussed Roof Construction, "Already Cut" and Fitted.

THIS barn is designed to meet the requirements of a dairy barn with extra large mow capacity. We have raised the concrete foundation 4 feet above the established grade level. On the foundation a sill is bolted, and on this the framing lumber for the windows and double plate for the support of the upper structure are erected. The framing is exactly as shown in the illustration on page 4. Ground floor height, 8 feet 6 inches. The trusses are held together by strong bolts, which we furnish. The capacity is very large and sufficient to meet more than ordinary requirements.

The whole construction is ingeniously conceived and carried through with simplicity and skill. The barn is of very imposing appearance on account of its great dimensions.

Long windows provide plenty of light and air for the ground floor. The windows are equipped with ventilation shields. Air can be quickly changed by lifting the windows back into the shields. The arrangement of the ventilation shields protects your stock from direct drafts.

Sanitary Steel Columns with base and cap support the main girders.

All framing lumber is No. 1 Yellow Pine.

For the outside walls we furnish Cypress drop siding up to the mow floor, and Cypress double V vertical siding for the upper part. This combination secures a very strong frame and outside walls that will last a lifetime.

For the roof of the barn we furnish **tight fitting tongued and grooved sheathing boards** on which is to be laid **Fire-Chief Shingle Roll Roofing. Fire-Chief Roofing** is guaranteed for **seventeen years.** It resembles painted shingles.

Barns 42 feet long have one dormer on each side.

Barns 56 and 70 feet long have two dormers on each side.

Barns over 70 feet long have three dormers on each side.

Doors are made of Clear Cypress. Ground floor doors are double thickness. Ground floor doors and the hay door slide on Roll Rite Hangers, the highest priced hangers we handle. A little hinged door at the mow level in one gable will be found of great convenience. All doors are **"ready made"**—ready to hang in place, and are superior to doors produced by hand carpentry.

We furnish all the necessary hardware and sufficient **paint for two coats,** oxide red for the body and white for the trim. Other combinations may be selected from our paint page (see page 48). Ventilating systems, cupolas, equipment, concrete silos, etc., are not included in price.

Floor Plans. See pages 40 to 42 for sample floor plan arrangements. **Be sure to specify number of the floor plan that best suits your requirements.** Use the enclosed sketch sheet to outline your needs when changes are necessary and return for quotation on equipment.

The "already cut" feature of this barn, together with **"ready made"** doors, sash, etc., at the price quoted, make it possible for you to erect this high class Dairy Barn at the lowest cost and at a big saving of time and labor. Building plans, which are easy to understand, are furnished with every order.

QUALITY GUARANTEED

Prices of "Dairy Belle" Modern Dairy Barn No. 2057, "Already Cut" and Fitted.

SIZE OF BARN			PRICE OF BARN			SIZE OF BARN			PRICE OF BARN		
Width, Feet	Length, Feet	Height From Sill to Eaves, Feet	With No. 1 Common Cypress Siding	With Select Siding	Haymow, Capacity in Tons	Width, Feet	Length, Feet	Height From Sill to Eaves, Feet	With No. 1 Common Cypress Siding	With Select Siding	Haymow, Capacity in Tons
30	42	18	$1,248.00	$1,320.00	61	34	98	18	$2,692.00	$2,806.00	168
30	56	18	1,542.00	1,617.00	81	34	112	18	3,014.00	3,135.00	192
30	70	18	1,829.00	1,913.00	101	34	126	18	3,334.00	3,466.00	215
32	42	18	1,328.00	1,398.00	71	34	140	18	3,652.00	3,796.00	240
32	56	18	1,629.00	1,708.00	95	36	42	18	1,468.00	1,542.00	77
32	70	18	1,930.00	2,020.00	118	36	56	18	1,805.00	1,889.00	102
32	84	18	2,232.00	2,330.00	142	36	70	18	2,140.00	2,236.00	127
32	98	18	2,529.00	2,609.00	166	36	84	18	2,467.00	2,581.00	153
34	42	18	1,416.00	1,480.00	71	36	98	18	2,812.00	2,918.00	178
34	56	18	1,735.00	1,817.00	96	36	112	18	3,147.00	3,380.00	204
34	70	18	2,053.00	2,148.00	120	36	126	18	3,483.00	3,619.00	229
34	84	18	2,375.00	2,476.00	144	36	140	18	3,838.00	3,964.00	255

"Already Cut" and Fitted.

ALREADY CUT AND FITTED PRICE **$1,351.00 AND UP**

A Modern Dairy Bridge Barn, With Large Storage Capacity, Truss Construction, "Already Cut" and Fitted.

THE attempt to construct a Bridge or Bank Dairy Barn meeting modern requirements of sanitation has long been a problem. Most bank barns are impractical as dairy barns because the ground floor is partially surrounded by earth walls. Such arrangement bars a great part of light and air from the ground floor. Without plenty of light and air a modern dairy barn is an impossibility. The great demand for a dairy barn combining access to the mow with team and load, a very large storage capacity and modern sanitary ground floor arrangements has prompted us to design this barn. Ground floor height, 8 feet 6 inches.

The barn is not to be built close against a bank. Sufficient space for light and air has to be left between the bank and the side wall of the barn. The intervening space is to be overbridged where the large driveway doors are located. (The bridge is not included in the price.)

Plenty of long windows on **every side** of the barn provide an abundance of light. The windows are equipped with ventilation shields. A quick change of air can be made by lifting the windows back into the ventilation shields. No direct draft touches the stock. The ventilation shields protect them. This arrangement solves the problem of a modern dairy bridge or bank barn satisfactorily.

Sanitary Tubular Steel Columns for the support of the main girders are also furnished.

The foundation walls are raised 4 feet above the grade level.

The framing lumber is No. 1 Yellow Pine. All trusses are to be bolted together.

For the outside walls we furnish Cypress drop siding up to the mow floor and Cypress double V vertical siding for the upper part. This combination secures a very strong frame and outside walls that will last a lifetime.

For the roof of the barn we furnish **tight fitting tongued and grooved sheathing boards to be laid on the rafters and covered with Fire-Chief Shingle Roll Roofing.** **Fire-Chief Roofing** is guaranteed by us for **seventeen years.** It resembles painted shingles.

Barns 42 feet long have one dormer on each side.

Barns 56 and 70 feet long have two dormers on each side.

Barns over 70 feet long have three dormers on each side.

Doors are made of Clear Cypress. The ground floor doors are of double thickness and slide on Roll Rite Hangers, the highest priced hangers we handle. The driveway doors also slide on Roll Rite Hangers and are large enough for big loads to enter the mow. The small built-in door in one of the driveway doors is convenient for personal entrance to the mow without the necessity of opening the large doors (see page 44). The advantage of the hinged door at the mow level is plain. All doors are **"ready made"**—ready to hang in place and are superior to those produced by hand carpentry.

In addition, we furnish all the necessary hardware, such as latches, bolts, screws, nails, etc., and sufficient **paint for two coats,** oxide red for the body and white for the trim. Other combinations may be selected from our paint page (see page 48). Ventilating systems, cupolas, equipment, silos, concrete, etc., are not included in the price.

Floor Plans. See pages 40 to 42 for sample floor plan arrangements. **Be sure to specify number of the floor plan that best suits your requirements.** Use the enclosed sketch sheet to outline your needs when changes are necessary and return for quotation on equipment.

Free building plans, which are easy to understand, are furnished with every order.

QUALITY GUARANTEED

Our "already cut" feature, together with factory **"ready made"** doors, sash, etc., enables you to build this modern bridge or bank dairy barn at a big saving of time and labor. Be sure to give size of barn when ordering.

Prices of "Dairy Queen" Modern Dairy Barn No. 2058, "Already Cut" and Fitted.

SIZE OF BARN			PRICE OF BARN		HAYMOW	SIZE OF BARN			PRICE OF BARN		HAYMOW
Width, Feet	Length, Feet	Height From Sill to Eaves, Feet	With No. 1 Common Cypress Siding	With Select Cypress Siding	Capacity in Tons	Width, Feet	Length, Feet	Height From Sill to Eaves, Feet	With No. 1 Common Cypress Siding	With Select Cypress Siding	Capacity in Tons
30	42	18	$1,351.00	$1,402.00	61	34	98	18	$2,748.00	$2,833.00	168
30	56	18	1,637.00	1,698.00	81	34	112	18	3,068.00	3,182.00	192
30	70	18	1,923.00	1,994.00	101	34	126	18	3,388.00	3,511.00	215
32	42	18	1,413.00	1,477.00	71	34	140	18	3,706.00	3,941.00	240
32	56	18	1,713.00	1,787.00	95	36	42	18	1,557.00	1,627.00	77
32	70	18	2,011.00	2,096.00	118	36	56	18	1,890.00	1,973.00	102
32	84	18	2,312.00	2,405.00	142	36	70	18	2,225.00	2,320.00	127
32	98	18	2,611.00	2,715.00	166	36	84	18	2,557.00	2,662.00	153
34	42	18	1,469.00	1,532.00	72	36	98	18	2,852.00	3,004.00	178
34	56	18	1,791.00	1,862.00	96	36	112	18	3,226.00	3,349.00	204
34	70	18	2,100.00	2,193.00	120	36	126	18	3,559.00	3,693.00	229
34	84	18	2,430.00	2,768.00	144	36	140	18	3,895.00	4,038.00	255

"Already Cut" and Fitted.

NOTE—Special door opposite driveway doors on mow floor, opening size 6 feet by 12 feet, on Roll Rite Hangers and Track, with barn door latch, complete, $26.18 extra.

ALREADY CUT AND FITTED PRICE **$1,060.00 AND UP**

A Modern Dairy Barn With Gothic Roof Construction and Drop Siding, Framing "Already Cut" and Fitted

GRACEFUL appearance is but an added feature to the simplicity of construction, strength and usefulness of this barn. This is a high class Dairy Barn with all sanitary features. The large number of long windows admit plenty of light and air. Windows on the ground floor are provided with ventilation shields. A quick change of air can be had by lifting the sash back into the ventilation shields. The shields are so constructed that no direct draft can touch your stock. Ground floor height, 8 feet 6 inches.

Sanitary Steel Tubular Columns, which are universally considered best for dairy barns, support the main girders. All the sanitary features have had our closest attention.

The lumber used for the framing is No. 1 Yellow Pine.

The outside walls are covered with drop siding of Cypress, "The Wood Eternal."

Doors are made of Clear Cypress. For the ground floor we furnish double thickness sliding doors on Roll Rite Hangers, the most expensive hangers we handle. The haymow door is hung on three solid strap hinges. A ring fastened on the inside of the door may be used in connection with the hay carrier to close the door. The convenience of the smaller hinged door on the mow level needs no explanation. All doors are **"ready made"**—ready to hang in place and are superior to those produced by hand carpentry.

The roof of this barn is made of strong, built-up arches. (See page 6.) These arches add to the good appearance of the interior. They form a strong and serviceable roof support and a spacious unobstructed mow. The roof is so simple that it requires no more skill to build it than the roof of any other barn. The arches are to be covered with **tight fitting tongued and grooved sheathing boards** on which you lay **Fire-Chief Shingle Roll Roofing. Fire-Chief Roofing** is guaranteed by us for **seventeen years,** and will last nearly **twenty-five years.** It resembles painted shingles.

Hardware, such as latches, bolts, nails, etc., is included in our price. Sufficient **paint for two coats** is furnished, oxide red for the body and white for the trim. You may select any other combination from our paint page (see page 48). All these items are furnished without extra charge. Ventilating systems, cupolas, barn equipment, foundation material and silos are not included in the price.

Floor Plans. See pages 40 to 42 for sample floor plan arrangements. **Be sure to specify number of the floor plan that best suits your requirements.** Use the enclosed sketch sheet to outline your needs when changes are necessary and return for quotation on equipment.

Can be furnished with Cross Driveway with 12x12-foot doors, with no mow floor over driveway and no hay door and hood; no extra charge.

When comparing prices be sure to notice that all framing lumber is already cut and fitted, that doors are all **made and ready to hang,** and that our roofing is guaranteed for 17 years. **Take no substitute for Cypress Siding.**

QUALITY GUARANTEED

Prices of the "Landmark" Modern Dairy Barn, No. 2056, "Already Cut" and Fitted.

SIZE OF BARN			PRICE OF BARN			SIZE OF BARN			PRICE OF BARN		
Width, Feet	Length, Feet	Height From Sill to Eaves, Feet	With No. 1 Common Cypress Siding	With Select Cypress Siding	Haymow Capacity in Tons	Width, Feet	Length, Feet	Height From Sill to Eaves, Feet	With No. 1 Common Cypress Siding	With Select Cypress Siding	Haymow Capacity in Tons
30	32	12	$1,060.00	$1,101.00	34	34	62	16	$1,967.00	$2,042.00	101
30	38	12	1,184.00	1,229.00	40	34	68	16	2,094.00	2,173.00	111
30	44	12	1,291.00	1,338.00	46	34	74	16	2,242.00	2,325.00	121
30	50	12	1,417.00	1,467.00	52	34	86	16	2,514.00	2,607.00	140
30	56	12	1,527.00	1,577.00	58	34	98	16	2,787.00	2,889.00	160
30	62	12	1,572.00	1,707.00	64	34	110	16	3,202.00	3,310.00	180
32	32	14	1,145.00	1,191.00	43	36	38	16	1,476.00	1,541.00	69
32	38	14	1,279.00	1,328.00	51	36	44	16	1,610.00	1,679.00	79
32	44	14	1,394.00	1,446.00	59	36	50	16	1,765.00	1,838.00	90
32	50	14	1,530.00	1,584.00	67	36	56	16	1,872.00	1,949.00	100
32	56	14	1,645.00	1,702.00	75	36	62	16	2,053.00	2,133.00	112
32	62	14	1,779.00	1,839.00	83	36	68	16	2,187.00	2,272.00	123
32	68	14	1,894.00	1,957.00	91	36	80	16	2,476.00	2,569.00	144
32	80	14	2,143.00	2,213.00	107	36	92	16	2,763.00	2,865.00	166
34	38	16	1,417.00	1,476.00	62	36	104	16	3,209.00	3,318.00	187
34	44	16	1,544.00	1,608.00	72	36	116	16	3,359.00	3,477.00	209
34	50	16	1,693.00	1,759.00	82	36	128	16	3,648.00	3,774.00	230
34	56	16	1,820.00	1,891.00	91	36	140	16	3,936.00	4,070.00	252

"Already Cut" and Fitted.

A GENERAL PURPOSE BARN WITH GOTHIC ROOF CONSTRUCTION IS SHOWN ON PAGE 16.

ALREADY CUT AND FITTED PRICE $666.00 AND UP

A Low Priced, Modern Barn, Trussed Roof Construction, "Already Cut" and Fitted

THIS barn is a bargain. It is designed for a flexible and convenient arrangement, providing solid comfort and sanitary conditions for a mixed stock.

It is of the trussed roof type as shown on page 4. The trusses are to be bolted together to secure greatest strength. We furnish the necessary bolts. Ground floor height, 8 feet 6 inches.

All framing lumber is of No. 1 yellow pine.

The outside walls are covered with double V vertical siding of Cypress, "The Wood Eternal." This combination secures a very strong frame and outside walls that will last a lifetime.

To make the roof good and strong, we furnish **tight fitting, tongued and grooved sheathing boards** to be laid on the rafters and covered with **Fire-Chief Shingle Roll Roofing. Fire-Chief Roofing** is guaranteed by us for **seventeen years.** It resembles painted shingles.

Doors are made of Clear Cypress, "The Wood Eternal." Ground floor doors and the double hay door slide on Roll Rite Hangers, the highest priced hangers we handle. A smaller hinged door on the mow floor level is convenient for many purposes. All doors are **"ready made"**—ready to hang in place and are superior to those produced by hand carpentry.

Large windows, 1⅜ inches thick, with nine lights, are liberally provided for the ground floor. Opening size of windows, 2 feet 8 inches by 3 feet 6 inches. Ventilation shields are furnished. A quick change of air can be made by lifting the windows back into the shields. The practical construction of the shields protects your stock from direct drafts.

End arrangement of barns, 24 feet wide, is shown in the small illustration. This size has a slightly different door and window arrangement on ground floor and a drop Hay Door.

Hardware, such as latches, bolts, screws, nails, etc., is included in the price, also sufficient **paint for two coats,** oxide red for the body and white for the trim. You may select other combinations from our paint page (see page 48). Ventilating systems, cupolas, barn equipment, silos, foundation material, etc., are not included in the price.

Floor Plans. See pages 40 to 42 for sample floor plan arrangements. **Be sure to specify number of the floor plan that best suits your requirements.** Use the enclosed sketch sheet to outline your needs when changes are necessary and return for quotation on equipment.

Our "already cut" feature, together with **"ready made"** doors, sash, etc., furnished at the prices quoted, make it possible for you to erect this high class general purpose barn at a remarkable saving of time and labor. Free building plans, which are easy to understand, are furnished with every order.

Order now and save money. **Be sure to give size.**

QUALITY GUARANTEED

Prices of "Favorite" Modern General Purpose Barn No. 2059, "Already Cut" and Fitted.

SIZE OF BARN			PRICE OF BARN		HAY-MOW, Capacity in Tons	SIZE OF BARN			PRICE OF BARN		HAY-MOW, Capacity in Tons
Width, Feet	Length, Feet	Height From Sill to Eaves, Feet	With No. 1 Common Cypress Siding	With Select Cypress Siding		Width, Feet	Length, Feet	Height From Sill to Eaves, Feet	With No. 1 Common Cypress Siding	With Select Cypress Siding	
24	28	12	$ 666.00	$ 695.00	17	34	98	16	$2,221.00	$2,318.00	132
24	42	12	860.00	895.00	25	34	112	16	2,479.00	2,584.00	151
24	56	12	1,054.00	1,094.00	34	34	126	16	2,734.00	2,850.00	170
28	28	12	752.00	790.00	24	34	140	16	2,990.00	3,098.00	189
28	42	12	968.00	1,008.00	36	36	42	16	1,251.00	1,316.00	76
28	56	12	1,179.00	1,226.00	47	36	56	16	1,514.00	1,587.00	101
28	70	12	1,391.00	1,444.00	59	36	70	16	1,704.00	1,858.00	126
30	42	12	1,019.00	1,066.00	38	36	84	16	2,032.00	2,132.00	151
30	56	12	1,236.00	1,289.00	50	36	98	16	2,299.00	2,402.00	176
30	70	12	1,453.00	1,531.00	63	36	112	16	2,563.00	2,672.00	202
30	84	12	1,671.00	1,745.00	76	36	126	16	2,825.00	2,948.00	227
32	42	14	1,134.00	1,195.00	51	36	140	16	3,092.00	3,216.00	252
32	56	14	1,296.00	1,437.00	67	40	42	16	1,372.00	1,445.00	74
32	70	14	1,603.00	1,680.00	84	40	56	16	1,658.00	1,750.00	99
32	84	14	1,838.00	1,923.00	101	40	70	16	1,943.00	2,035.00	123
32	98	14	2,072.00	2,164.00	118	40	84	16	2,250.00	2,330.00	149
34	42	16	1,195.00	1,257.00	57	40	98	16	2,515.00	2,625.00	174
34	56	16	1,453.00	1,523.00	76	40	112	16	2,800.00	2,918.00	198
34	70	16	1,708.00	1,789.00	95	40	126	16	3,087.00	3,151.00	223
34	84	16	1,966.00	2,045.00	113	40	140	16	3,371.00	3,508.00	248

"Already Cut" and Fitted. "Already Cut" and Fitted. "Already Cut" and Fitted. "Already Cut" and Fitted.



ALREADY CUT AND FITTED PRICE $600.00 AND UP

A Modern General Purpose Barn, Braced Rafter Type, With Drop Siding.

LIGHT, air and comfort for a mixed stock are the special features of this General Purpose Barn. The construction is of the braced rafter type shown on page 3.

Ground floor height, 8 feet 6 inches.

Framing lumber is of No. 1 yellow pine.

The outside walls are covered with drop siding of Cypress, "The Wood Eternal." This secures a strong and weather resisting combination.

To make the roof good and strong we furnish **tight fitting tongued and grooved sheathing boards** to be laid on the rafters and covered with **Fire-Chief Shingle Roll Roofing. Fire-Chief Roofing** is guaranteed by us for **seventeen years.** It resembles painted shingles.

Doors are made of Clear Cypress, "The Wood Eternal." Ground floor doors and the double hay door slide on Roll Rite Hangers, the highest priced hangers we handle. A smaller hinged door on the mow floor level is convenient for many purposes. All doors are **"ready made"**—ready to hang in place and are superior to those produced by hand carpentry.

Large windows, 1⅜ inches thick, with nine lights, are liberally provided for the ground floor. Opening size of windows is 2 feet 8 inches by 3 feet 6 inches. Ventilation shields are furnished. A quick change of air can be made by lifting the windows back into the shields. The practical construction of the shields protects your stock from direct drafts.

End arrangement of barn, 24 feet wide, is shown in the small illustration. This size has different door and window arrangement on ground floor and a drop hay door.

Hardware, such as latches, bolts, screws, nails, etc., is included in the price, also sufficient **paint for two coats,** oxide red for the body and white for the trim. You may select other combinations from our paint page (see page 48). Ventilating systems, cupolas, barn equipment, silos, foundation material, etc., are not included in the price.

Floor Plans. See pages 40 to 42 for sample floor plan arrangements. **Be sure to specify number of the floor plan that best suits your requirements.** Use the enclosed sketch sheet to outline your needs when changes are necessary and return for quotation on equipment.

Our "already cut" feature, together with **"ready made"** doors, sash, etc., furnished at the prices quoted, make it possible for you to erect this modern general purpose barn at a remarkable saving of time and labor. Free building plans, which are easy to understand, are furnished with every order.

QUALITY GUARANTEED

You will appreciate the value, economy and convenience in this strong and sanitary modern general purpose barn.

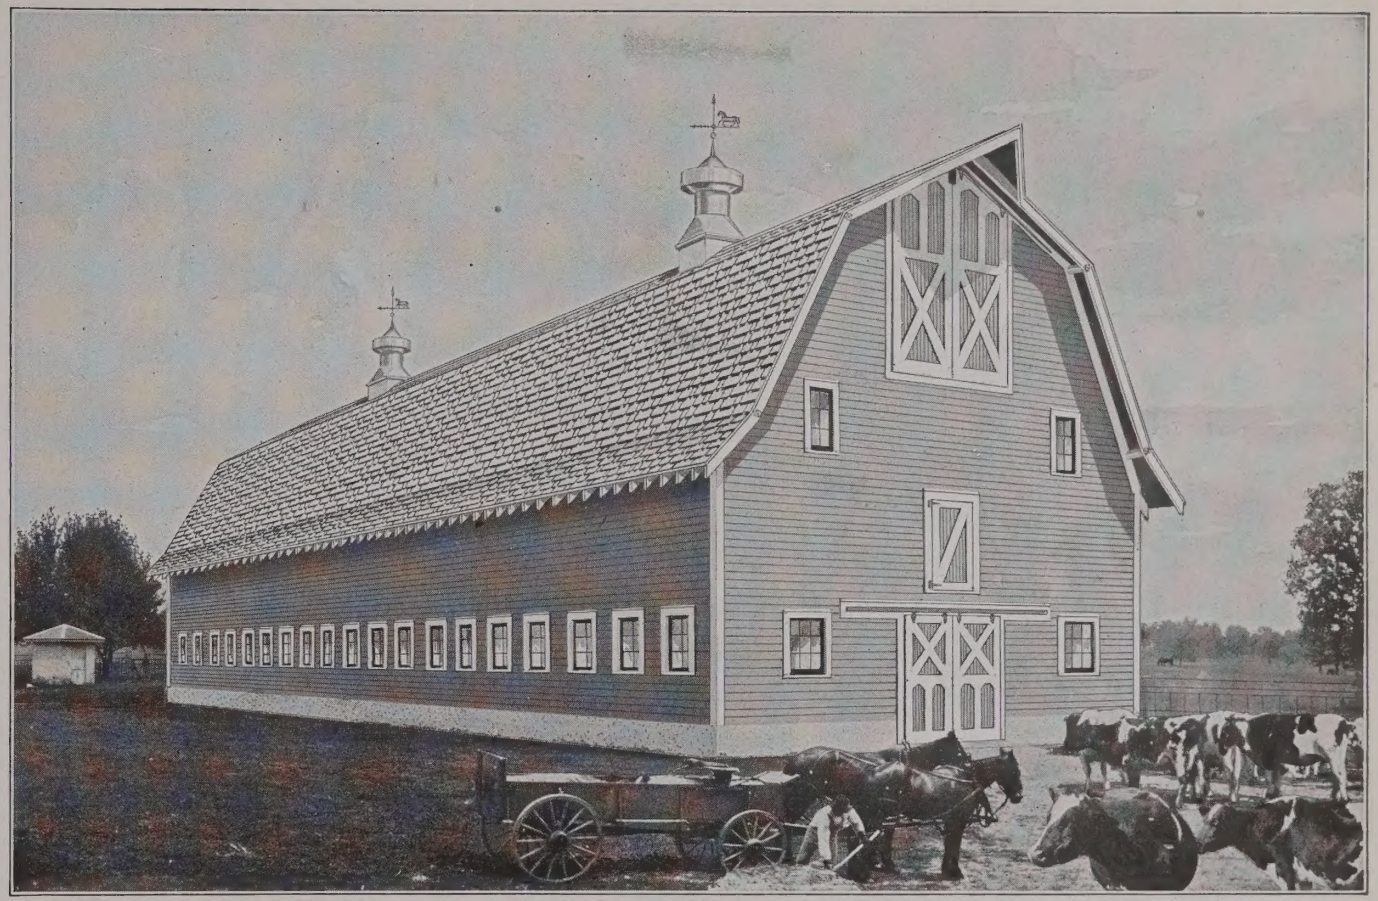



Prices of "Ideal" Modern General Purpose Barn No. 2060, "Already Cut" and Fitted.

SIZE OF BARN			PRICE OF BARN		HAY-MOW Capacity in Tons	SIZE OF BARN			PRICE OF BARN		HAY-MOW Capacity in Tons
Width, Feet	Lgth., Feet	Height, From Sill to Eaves, Feet	With No. 1 Common Cypress Siding	With Select Cypress Siding		Width, Feet	Lgth., Feet	Height, From Sill to Eaves, Feet	With No. 1 Common Cypress Siding	With Select Cypress Siding	
24	26	12	$ 600.00	$ 627.00	17	34	44	16	$1,205.00	$1,262.00	63
24	32	12	678.00	709.00	21	34	56	16	1,429.00	1,495.00	80
24	38	12	757.00	791.00	25	34	68	16	1,651.00	1,726.00	97
24	44	12	835.00	869.00	29	34	74	16	1,764.00	1,841.00	106
28	32	12	812.00	849.00	29	34	86	16	1,988.00	2,073.00	123
28	38	12	905.00	944.00	34	34	98	16	2,212.00	2,304.00	140
28	44	12	998.00	1,040.00	39	36	38	16	1,138.00	1,195.00	61
28	56	12	1,182.00	1,232.00	49	36	44	16	1,254.00	1,316.00	71
30	32	12	887.00	928.00	29	36	56	16	1,486.00	1,556.00	90
30	38	12	986.00	1,030.00	34	36	68	16	1,718.00	1,795.00	109
30	44	12	1,085.00	1,132.00	43	36	74	16	1,833.00	1,916.00	118
30	50	12	1,183.00	1,234.00	49	36	86	16	2,066.00	2,155.00	138
30	62	12	1,392.00	1,448.00	61	36	98	16	2,298.00	2,395.00	157
30	74	12	1,579.00	1,642.00	72	36	110	16	2,485.00	2,634.00	176
32	32	14	926.00	966.00	38	36	146	16	3,226.00	3,354.00	234
32	38	14	1,022.00	1,072.00	45	40	56	16	1,637.00	1,711.00	104
32	44	14	1,123.00	1,183.00	51	40	68	16	1,885.00	1,968.00	125
32	56	14	1,327.00	1,396.00	66	40	98	16	2,510.00	2,614.00	180
32	62	14	1,429.00	1,492.00	73	40	110	16	2,760.00	2,873.00	202
32	74	14	1,632.00	1,702.00	87	40	134	16	3,258.00	3,389.00	247
34	38	16	1,092.00	1,146.00	55	40	152	16	3,633.00	3,776.00	280

"Already Cut" and Fitted. "Already Cut" and Fitted.

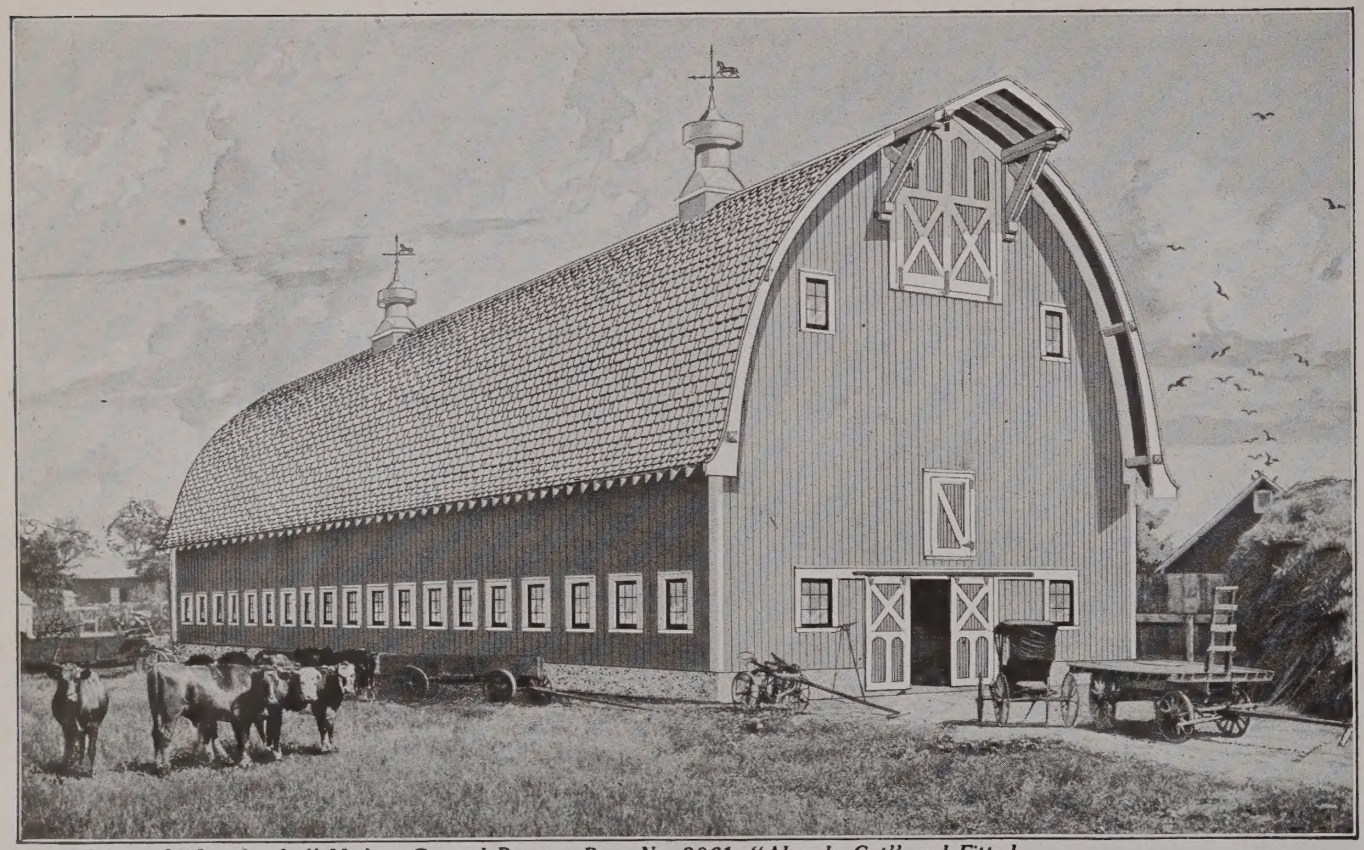

ALREADY CUT AND FITTED PRICE $647.00 AND UP

A General Purpose Barn, With Gothic Roof Construction and Vertical V Siding.

THIS barn is as strong as it is attractive (see front cover). It is easy to build and requires no expensive labor. The haymow is large and unobstructed. Simple directions which go with every barn will fully explain the manner of erecting it.

Wherever a Gothic Roof Barn is erected, the builder is very proud of it. His neighbors want one like it. Our customers who put up this barn will have a building that will be admired by everybody. Height of ground floor, 8 feet 6 inches.

All framing lumber is of No. 1 Yellow Pine.

The outside walls are covered with double V pattern vertical siding of cypress, "The Wood Eternal." This combination secures a very strong frame and outside walls that will withstand the weather for a lifetime.

The roof arches are good and strong, easy to build up and provide an unobstructed mow, as shown on page 6. The arches are to be covered with tight fitting tongued and grooved sheathing boards which we furnish, over which is to be laid **Fire-Chief Shingle Roll Roofing. Fire-Chief Roofing** is guaranteed by us for **seventeen years.** It resembles painted shingles.

Doors are made of Clear Cypress, "The Wood Eternal." Ground floor doors slide on Roll Rite Hangers, the highest priced hangers we handle. The haymow door has three extra heavy strap hinges. A smaller door on the mow floor level is convenient for many purposes. All doors are **"ready made"**—ready to hang in place and are superior to those produced by hand carpentry.

Large windows, 1⅜ inches thick, with nine lights, are liberally provided for the ground floor. Opening size of windows is 2 feet 8 inches by 3 feet 6 inches. Ventilation shields are furnished. A quick change of air can be made by lifting the windows back into the shields. This protects your stock from direct drafts.

Different door arrangements are furnished at the ends of barns 24 feet wide (see small illustration).

Hardware, such as latches, bolts, screws, nails, etc., is included in the price, also sufficient **paint for two coats,** oxide red for the body and white for the trim. You may select other combinations from our paint page (see page 48). Ventilating systems, cupolas, barn equipment, silos, foundation material, etc., are not included in the price.

Floor Plans. See pages 40 to 42 for sample floor plan arrangements. **Be sure to specify number of the floor plan that best suits your requirements.** Use the enclosed sketch sheet to outline your needs when changes are necessary and return for quotation on equipment.

Can be furnished with Cross Driveway with 12x12-foot doors, with no mow floor over Cross Driveway, and no hay door and hood; no extra charge.

Prices of "Our Leader" Modern General Purpose Barn No. 2061, "Already Cut" and Fitted.

SIZE OF BARN			PRICE OF BARN		HAYMOW	SIZE OF BARN			PRICE OF BARN		HAYMOW
Width, Feet	Length, Feet	Height From Sill to Eaves, Feet	With No. 1 Common Cypress Siding	With Select Cypress Siding	Capacity in Tons	Width, Feet	Length, Feet	Height From Sill to Eaves, Feet	With No. 1 Common Cypress Siding	With Select Cypress Siding	Capacity in Tons
24	24	12	$ 647.00	$ 690.00	18	34	68	16	$2.005.00	$2.091.00	111
24	32	12	779.00	812.00	22	34	74	16	2.143.00	2.232.00	121
24	38	12	867.00	929.00	26	34	86	16	2.419.00	2.515.00	140
24	44	12	957.00	997.00	30	34	98	16	2.696.00	2.799.00	160
24	50	12	1.045.00	1.073.00	35	34	110	16	2.972.00	3.084.00	180
28	32	12	903.00	943.00	30	36	38	16	1.361.00	1.432.00	69
28	38	12	1.002.00	1.047.00	35	36	44	16	1.504.00	1.579.00	79
28	44	12	1.108.00	1.155.00	41	36	50	16	1.646.00	1.724.00	90
28	50	12	1.212.00	1.261.00	47	36	56	16	1.788.00	1.871.00	100
28	56	12	1.315.00	1.366.00	52	36	62	16	1.931.00	2.007.00	112
30	32	12	962.00	1.000.00	34	36	68	16	2.063.00	2.154.00	123
30	38	12	1.068.00	1.113.00	40	36	80	16	2.375.00	2.458.00	144
30	44	12	1.178.00	1.228.00	46	36	92	16	2.645.00	2.751.00	166
30	50	12	1.288.00	1.340.00	52	36	104	16	2.943.00	3.045.00	187
30	56	12	1.398.00	1.455.00	58	36	116	16	3.220.00	3.337.00	209
30	62	12	1.509.00	1.568.00	64	36	128	16	3.500.00	3.579.00	230
32	32	14	1.055.00	1.106.00	43	36	140	16	3.790.00	3.924.00	252
32	38	14	1.178.00	1.235.00	51	40	44	16	1.670.00	1.755.00	88
32	44	14	1.302.00	1.365.00	59	40	50	16	1.824.00	1.911.00	100
32	50	14	1.427.00	1.490.00	67	40	56	16	1.978.00	2.066.00	112
32	56	14	1.563.00	1.618.00	75	40	62	16	2.126.00	2.220.00	124
32	62	14	1.679.00	1.742.00	83	40	68	16	2.278.00	2.378.00	136
32	68	14	1.803.00	1.877.00	91	40	74	16	2.429.00	2.538.00	148
32	80	14	2.049.00	2.128.00	107	40	80	16	2.581.00	2.691.00	160
34	38	16	1.316.00	1.382.00	62	40	92	16	2.886.00	3.002.00	184
34	44	16	1.454.00	1.523.00	72	40	104	16	3.192.00	3.315.00	208
34	50	16	1.621.00	1.665.00	82	40	116	16	3.492.00	3.626.00	232
34	56	16	1.729.00	1.811.00	91	40	128	16	3.795.00	3.936.00	256
34	62	16	1.868.00	1.949.00	101	40	140	16	4.099.00	4.248.00	280

"Already Cut" and Fitted. "Already Cut" and Fitted. "Already Cut" and Fitted. "Already Cut" and Fitted.

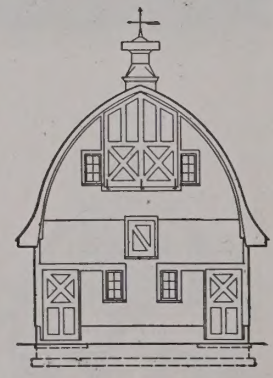

Be sure to notice that all our framing timber is already cut and fitted, that our doors are all **made and ready to hang,** that our roofing is guaranteed for seventeen years. **Take no substitute for Cypress Siding. When ordering barn be sure to give size.**

QUALITY GUARANTEED

ALREADY CUT AND FITTED PRICE $599.00 AND UP

An Inexpensive Modern General Purpose Barn, Braced Rafter Construction, Drop Siding.

HERE is a modern barn that is within the reach of all. While every farm building in this catalog is priced very low when quality is considered, this General Purpose Barn, "already cut" and fitted, is an exceptional money saving value. It is suitable for all sections of the country and will give extra good service on any farm.

This barn is of the braced rafter construction (see page 3). Ground floor height, 8 feet 6 inches.

All framing lumber is of No. 1 Yellow Pine.

The outside walls are covered with drop siding of Cypress, "The Wood Eternal." This combination secures a very strong frame and outside walls that will last a lifetime.

To make the roof good and strong, we furnish **tight fitting tongued and grooved sheathing boards** to be laid on the rafters and covered with **Fire-Chief Shingle Roll Roofing. Fire-Chief Roofing** is guaranteed by us for **seventeen years.** It resembles painted shingles.

Doors are made of Clear Cypress, "The Wood Eternal." Ground floor doors slide on Roll Rite Hangers, the highest priced hangers we handle. The haymow door in front gable is hung on three extra strong strap hinges. A smaller door on the mow floor level is convenient for many purposes. All doors are **"ready made"**—ready to hang in place and are superior to doors produced by hand carpentry.

Windows are four-light sash, opening size, 1 foot 10½ inches by 2 feet 9½ inches. In barns 24 feet wide the location of doors and windows is changed as shown in small illustration.

Hardware, such as latches, bolts, screws, nails, etc., is included in the prices, also sufficient paint for two coats, oxide red for the body and white for the trim, or you may select other combinations from our paint page. (See page 48.) Ventilating systems, cupolas, barn equipment, silos, foundation material, etc., are not included in the price.

Floor Plans. See pages 40 to 42 for sample floor plan arrangements. **Be sure to specify number of the floor plan that best suits your requirements.** Use the enclosed sketch sheet to outline your needs when changes are necessary and return for quotation on equipment.

Be sure to notice that all framing lumber is "already cut" and fitted, that doors are all **made and ready to hang,** that our roofing is guaranteed for seventeen years. **Take no substitute for Cypress Siding.**

No. 2062



Door and Window Arrangement on Ground Floor of Barn 24 Feet Wide.

SIZE OF BARN			PRICE OF BARN		HAYMOW	SIZE OF BARN			PRICE OF BARN		HAYMOW
Width Feet	Length Feet	Ht., From Sill to Eaves, Ft.	No. 1 Common Cypress Siding.	Select Cypress Siding	Capacity in Tons	Width Feet	Length Feet	Ht., From Sill to Eaves, Ft.	No. 1 Common Cypress Siding	Select Cypress Siding	Capacity in Tons
24	28	12	$ 599.00	$ 630.00	18	34	52	16	$1,345.00	$1,434.00	74
24	34	12	675.00	709.00	22	34	58	16	1,441.00	1,544.00	83
24	40	12	750.00	789.00	26	34	64	16	1,559.00	1,649.00	92
24	46	12	827.00	867.00	29	34	70	16	1,677.00	1,762.00	100
24	52	12	903.00	946.00	33	34	76	16	1,776.00	1,874.00	109
28	34	12	799.00	837.00	30	34	82	16	1,884.00	1,988.00	117
28	40	12	889.00	930.00	35	34	88	16	1,992.00	2,100.00	126
28	46	12	979.00	1,025.00	40	34	100	16	2,207.00	2,326.00	143
28	52	12	1,069.00	1,116.00	46	36	40	16	1,179.00	1,246.00	64
28	58	12	1,151.00	1,209.00	51	36	46	16	1,294.00	1,397.00	74
30	34	12	866.00	912.00	33	36	52	16	1,411.00	1,485.00	83
30	40	12	962.00	1,011.00	39	36	58	16	1,525.00	1,605.00	93
30	46	12	1,060.00	1,109.00	45	36	64	16	1,642.00	1,726.00	102
30	52	12	1,158.00	1,213.00	51	36	70	16	1,757.00	1,853.00	112
30	58	12	1,255.00	1,313.00	57	36	82	16	1,989.00	2,086.00	131
30	64	12	1,353.00	1,424.00	62	36	94	16	2,221.00	2,316.00	150
30	70	12	1,450.00	1,514.00	68	36	106	16	2,453.00	2,486.00	170
30	76	12	1,547.00	1,612.00	74	36	130	16	2,916.04	3,045.00	208
32	34	14	913.00	962.00	40	36	136	16	3,032.00	3,166.00	218
32	40	14	1,015.00	1,068.00	47	40	46	16	1,398.00	1,467.00	85
32	46	14	1,118.00	1,160.00	54	40	52	16	1,512.00	1,594.00	96
32	52	14	1,220.00	1,279.00	61	40	58	16	1,636.00	1,721.00	107
32	58	14	1,321.00	1,395.00	68	40	64	16	1,759.00	1,849.00	118
32	64	14	1,423.00	1,491.00	75	40	70	16	1,882.00	1,977.00	129
32	70	14	1,525.00	1,602.00	82	40	76	16	2,006.00	2,105.00	140
32	76	14	1,627.00	1,703.00	89	40	82	16	2,128.00	2,238.00	151
32	82	14	1,728.00	1,809.00	96	40	94	16	2,448.00	2,484.00	173
32	88	14	1,832.00	1,904.00	103	40	106	16	2,621.00	2,742.00	195
34	34	16	1,019.00	1,085.00	49	40	130	16	3,115.00	3,253.00	239
34	40	16	1,126.00	1,198.00	57	40	142	16	3,361.00	3,507.00	261
34	46	16	1,234.00	1,309.00	66						

"Already Cut" and Fitted.

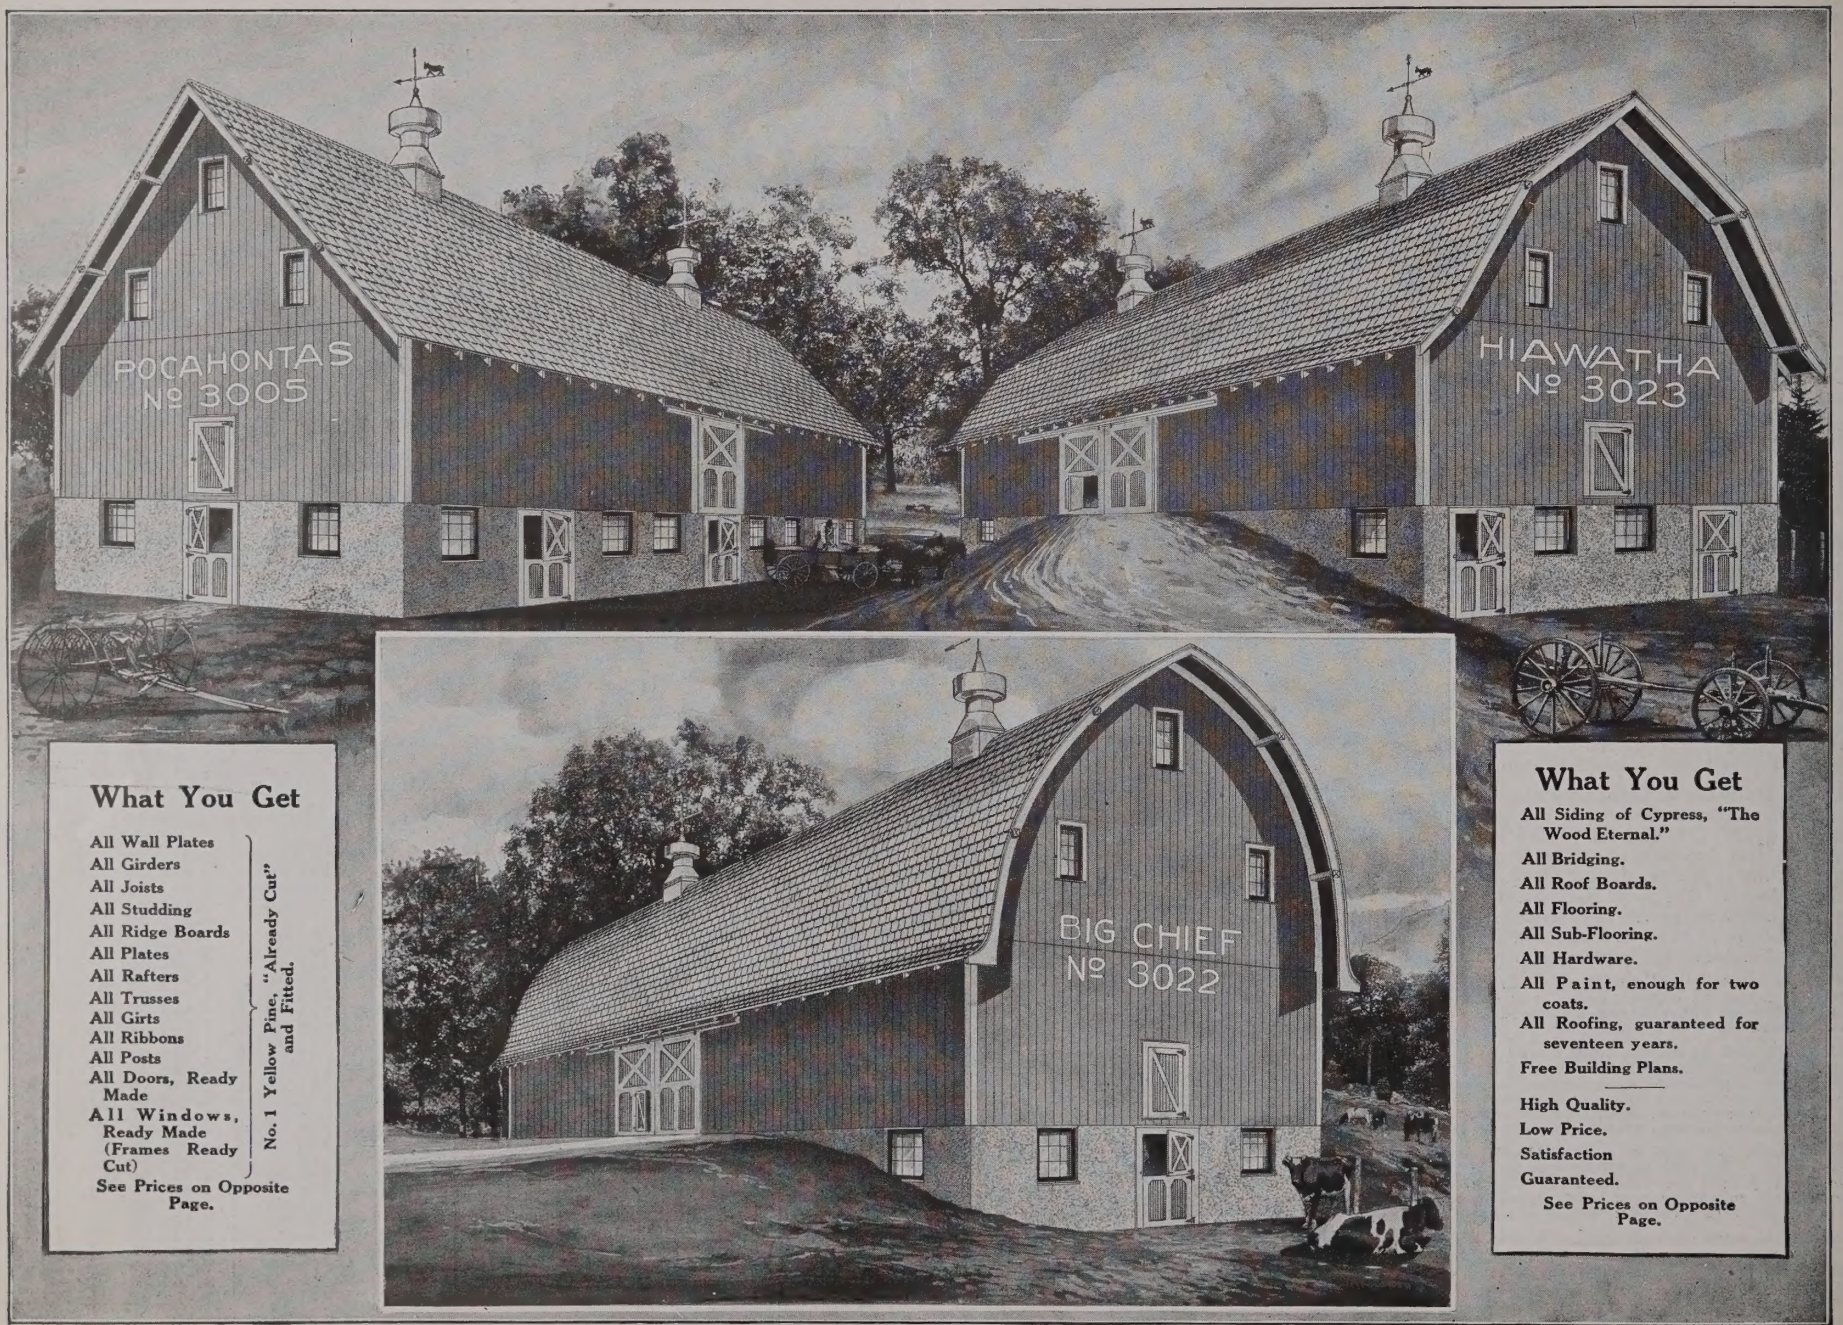

What You Get

No. 1 Yellow Pine, "Already Cut and Fitted."

- All Wall Plates
- All Girders
- All Joists
- All Studding
- All Ridge Boards
- All Plates
- All Rafters
- All Trusses
- All Girts
- All Ribbons
- All Posts
- All Doors, Ready Made
- All Windows, Ready Made (Frames Ready Cut)

See Prices on Opposite Page.

What You Get

- All Siding of Cypress, "The Wood Eternal."
- All Bridging.
- All Roof Boards.
- All Flooring.
- All Sub-Flooring.
- All Hardware.
- All Paint, enough for two coats.
- All Roofing, guaranteed for seventeen years.
- Free Building Plans.

- High Quality.
- Low Price.
- Satisfaction
- Guaranteed.

See Prices on Opposite Page.

Inexpensive Modern Bank Barns "Already Cut" and Fitted

Prices of the "Pocahontas" Modern Bank Barn No. 3005, "Already Cut" and Fitted.

SIZE OF BARN			PRICE OF BARN		
Width, Feet	Length, Feet	Height From Sill to Eaves, Feet	With No. 1 Common Cypress Siding	With Select Cypress Siding	HAY-MOW Capacity in Tons
30	32	16	$ 999.00	$1,041.00	45
30	42	16	1,182.00	1,240.00	59
30	46	16	1,255.00	1,309.00	55
30	56	16	1,440.00	1,500.00	69
30	60	16	1,514.00	1,576.00	73
30	70	16	1,698.00	1,766.00	87
30	74	16	1,770.00	1,842.00	103
30	84	16	1,956.00	2,033.00	117
30	88	16	2,029.00	2,109.00	123
30	98	16	2,207.00	2,299.00	136
32	32	16	1,034.00	1,081.00	51
32	42	16	1,223.00	1,277.00	67
32	46	16	1,299.00	1,356.00	73
32	56	16	1,489.00	1,552.00	89
32	60	16	1,566.00	1,633.00	96
32	70	16	1,755.00	1,840.00	112
32	74	16	1,832.00	1,906.00	118
32	84	16	2,022.00	2,103.00	134
32	88	16	2,097.00	2,182.00	141
32	98	16	2,287.00	2,379.00	157
34	42	16	1,272.00	1,328.00	75
34	46	16	1,350.00	1,411.00	82
34	56	16	1,551.00	1,618.00	100
34	60	16	1,631.00	1,700.00	108
34	70	16	1,831.00	1,906.00	126
34	74	16	1,910.00	1,988.00	134
34	84	16	2,110.00	2,195.00	152
34	88	16	2,190.00	2,277.00	158
34	98	16	2,388.00	2,485.00	176
36	42	16	1,324.00	1,384.00	80
36	46	16	1,406.00	1,468.00	88
36	56	16	1,612.00	1,679.00	107
36	60	16	1,693.00	1,766.00	115
36	70	16	1,898.00	1,976.00	134
36	74	16	1,981.00	2,061.00	141
36	84	16	2,186.00	2,273.00	160
36	88	16	2,267.00	2,365.00	167
36	98	16	2,474.00	2,570.00	186
36	112	16	2,761.00	2,866.00	213
40	42	16	1,399.00	1,458.00	92
40	46	16	1,485.00	1,551.00	101
40	56	16	1,699.00	1,773.00	123
40	60	16	1,786.00	1,861.00	132
40	70	16	2,000.00	2,083.00	154
40	74	16	2,085.00	2,171.00	163
40	84	16	2,302.00	2,400.00	185
40	88	16	2,387.00	2,491.00	194
40	98	16	2,602.00	2,705.00	215
40	112	16	2,903.00	3,013.00	246

Trussed Roof Construction

This Description Applies to All Barns Priced on This and Illustrated on the Opposite Page.

THESE barns are designed after the most popular models in the United States.

The driveway—or barn floor—is 14 feet wide and provides ample room for threshing, baling of hay or storage. Additional driveways or barn floors can be arranged, if desired, at small cost.

These barns are to be erected on a foundation of concrete or masonry extending 8 feet 4 inches above the grade line. The ceiling height of the stable part, or ground floor, is 8 feet 6 inches.

All framing lumber is of No. 1 Yellow Pine.

The outside walls are sided with double V vertical siding of Cypress, "The Wood Eternal." This secures a very strong frame and outside walls that will withstand the weather a lifetime.

The floor in the stable part is to be of concrete or masonry. Flooring for the upper part consists of 1-inch flooring which is tongued and grooved to secure a better fit and to keep the ground floor free of dust from the mow above. In the driveway or barn floor, planks 2 inches thick are laid over the tongued and grooved flooring.

Prices of the "Big Chief" Modern Bank Barn No. 3022, "Already Cut" and Fitted.

SIZE OF BARN			PRICE OF BARN		
Width, Feet	Length, Feet	Height From Sill to Eaves, Feet	With No. 1 Common Cypress Siding	With Select Cypress Siding	HAY-MOW Capacity in Tons
30	32	16	$1,128.00	$1,174.00	57
30	42	16	1,327.00	1,384.00	75
30	46	16	1,407.00	1,459.00	82
30	56	16	1,611.00	1,679.00	100
30	60	16	1,693.00	1,762.00	108
30	70	16	1,896.00	1,973.00	126
30	74	16	1,978.00	2,056.00	134
30	84	16	2,182.00	2,267.00	152
30	88	16	2,313.00	2,352.00	158
30	98	16	2,467.00	2,560.00	176
32	32	16	1,173.00	1,228.00	64
32	42	16	1,386.00	1,447.00	84
32	46	16	1,471.00	1,534.00	92
32	56	16	1,683.00	1,753.00	112
32	60	16	1,768.00	1,842.00	120
32	70	16	1,981.00	2,059.00	140
32	74	16	2,065.00	2,153.00	148
32	84	16	2,280.00	2,366.00	168
32	88	16	2,370.00	2,454.00	176
32	98	16	2,573.00	2,686.00	196
34	42	16	1,431.00	1,501.00	92
34	46	16	1,518.00	1,585.00	101
34	56	16	1,727.00	1,810.00	123
34	60	16	1,831.00	1,900.00	132
34	70	16	2,035.00	2,124.00	154
34	74	16	2,131.00	2,227.00	162
34	84	16	2,349.00	2,439.00	185
34	88	16	2,436.00	2,536.00	193
34	98	16	2,661.00	2,754.00	215
36	42	16	1,489.00	1,557.00	101
36	46	16	1,582.00	1,651.00	110
36	56	16	1,815.00	1,891.00	135
36	60	16	1,908.00	1,986.00	145
36	70	16	2,141.00	2,225.00	168
36	74	16	2,234.00	2,322.00	178
36	84	16	2,472.00	2,560.00	203
36	88	16	2,559.00	2,662.00	212
36	98	16	2,792.00	2,896.00	236
40	42	16	1,589.00	1,662.00	117
40	46	16	1,683.00	1,759.00	128
40	56	16	1,919.00	2,001.00	152
40	60	16	2,018.00	2,098.00	163
40	70	16	2,248.00	2,346.00	187
40	74	16	2,349.00	2,437.00	198
40	84	16	2,578.00	2,680.00	222
40	88	16	2,673.00	2,784.00	233
40	98	16	2,909.00	3,026.00	257

Prices of the "Hiawatha" Modern Bank Barn No. 3023, "Already Cut" and Fitted.

SIZE OF BARN			PRICE OF BARN		
Width, Feet	Length, Feet	Height From Sill to Eaves, Feet	With No. 1 Common Cypress Siding	With Select Cypress Siding	HAY-MOW Capacity in Tons
30	32	16	$1,034.00	$1,087.00	48
30	42	16	1,225.00	1,279.00	63
30	46	16	1,293.00	1,356.00	69
30	56	16	1,478.00	1,541.00	79
30	60	16	1,550.00	1,619.00	90
30	70	16	1,736.00	1,816.00	105
30	74	16	1,810.00	1,886.00	111
30	84	16	1,995.00	2,084.00	126
30	88	16	2,069.00	2,165.00	132
30	98	16	2,254.00	2,346.00	147
32	32	16	1,073.00	1,130.00	57
32	42	16	1,270.00	1,326.00	75
32	46	16	1,352.00	1,407.00	82
32	56	16	1,540.00	1,608.00	100
32	60	16	1,618.00	1,688.00	108
32	70	16	1,812.00	1,889.00	126
32	74	16	1,892.00	1,970.00	134
32	84	16	2,086.00	2,171.00	158
32	88	16	2,163.00	2,257.00	176
32	98	16	2,357.00	2,460.00	61
34	42	16	1,314.00	1,381.00	80
34	46	16	1,394.00	1,465.00	88
34	56	16	1,598.00	1,674.00	106
34	60	16	1,679.00	1,751.00	114
34	70	16	1,880.00	1,960.00	133
34	74	16	1,963.00	2,044.00	141
34	84	16	2,165.00	2,262.00	160
34	88	16	2,253.00	2,343.00	168
34	98	16	2,449.00	2,547.00	186
36	42	16	1,370.00	1,459.00	84
36	46	16	1,448.00	1,520.00	92
36	56	16	1,656.00	1,759.00	112
36	60	16	1,739.00	1,814.00	120
36	70	16	1,948.00	2,059.00	140
36	74	16	2,031.00	2,115.00	148
36	84	16	2,239.00	2,366.00	168
36	88	16	2,323.00	2,415.00	176
36	98	16	2,538.00	2,661.00	196
40	42	16	1,473.00	1,550.00	101
40	46	16	1,561.00	1,640.00	110
40	56	16	1,782.00	1,862.00	134
40	60	16	1,871.00	1,953.00	144
40	70	16	2,092.00	2,194.00	168
40	74	16	2,251.00	2,278.00	178
40	84	16	2,408.00	2,499.00	201
40	88	16	2,496.00	2,590.00	211
40	98	16	2,716.00	2,817.00	235

To make the roof good and strong we furnish **tight fitting tongued and grooved sheathing boards** to be laid on the rafters and covered with **Fire-Chief Shingle Roll Roofing, guaranteed by us for seventeen years.** It resembles painted shingles.

Doors are made of Clear Cypress, "The Wood Eternal." For the basement of every barn quoted on this page we furnish four convenient Dutch Doors, 56A5060, 1⅝ inches thick. They can be located to suit the arrangement of the ground floor or stable. For the upper part at the entrance of the driveway, one pair of large Driveway Doors, 56A5059, opening size 12 feet by 12 feet, with a smaller built-in door. Opposite the driveway doors a smaller sliding door is provided, opening size 6 feet by 12 feet. Driveway doors slide on Roll Rite Hangers. The small hinged door in one gable will be found very convenient. All doors are **"ready made"**—ready to hang in place.

Large windows 1⅜ inches thick with 9 lights, opening size 2 feet 8 inches by 3 feet 6 inches, are provided for one side, and the two ends of the ground floor. On the bank side two windows are furnished. All windows on the ground floor are furnished with ventilation shields. A quick change of air can be made by lifting the windows back into these shields. The practical construction of the shields protects your stock from direct drafts. For each gable we furnish three windows, 1⅜ inches thick with six lights, opening size 1 foot 9½ inches by 3 feet 6 inches.

Hardware, such as latches, bolts, screws, nails, etc., is included in the price, also sufficient paint for two coats—oxide red for the body and white for trim. You may select other combinations from our paint page. (See page 48.) Ventilating system, cupolas, foundation material and barn equipment are not included. Write for prices.

The floor plan for these barns can be arranged in the greatest variety, and without difficulty.

Our "already cut" feature, together with **"ready made"** doors, sash, etc., furnished at the price quoted, make it possible for you to build any of these barns at a remarkable saving of money, time and labor. Free building plans, which are easy to understand, are furnished with every order. **Take no substitute for Cypress Siding. When ordering be sure to give the size.**

ALREADY CUT AND FITTED PRICE **$772.00 AND UP**

A Modern Driveway Barn in Braced Rafter Construction, Drop Siding.

THIS Driveway Barn is much favored on account of its many conveniences. The arrangement permits driving into the barn with a load. The driveway may serve as a threshing floor or a place for implement storage in Winter. There is a big demand for this type of barn. Do not overlook the fact that the gambrel roof and the strong braced rafter construction permit of large storage capacity. Enough light is provided to make either section of the barn serve the purpose of a dairy barn or a barn for mixed stock. Where horses and cows are stabled under one roof, there is a possibility of a convenient floor arrangement to prevent the odors of the horse stable from mingling with the air in the cow stable. The feeding facilities also can be arranged very conveniently. Ground floor height, 8 feet 6 inches.

All framing lumber is of No. 1 Yellow Pine.

The outside walls are covered with drop siding of Cypress, "The Wood Eternal." This combination secures a very strong frame and outside walls that will withstand the weather a lifetime.

To make the roof good and strong, we furnish **tight fitting tongued and grooved sheathing boards,** to be laid on the rafters and covered with **Fire-Chief Shingle Roll Roofing. Fire-Chief Roofing** is guaranteed by us for **seventeen years.** It resembles painted shingles.

Doors are made of Clear Cypress, "The Wood Eternal." For the ground floor two pairs of spacious driveway doors, one pair on each side, and four sliding doors, two in each end, are provided. One wing of the driveway doors is furnished with a smaller built-in door for personal entrance (see page 44). The doors slide on Roll Rite Hangers, the highest priced hangers we handle. Two smaller hinged doors, one in each end at the mow floor level, are convenient for many purposes. All doors are **"ready made"**—ready to hang in place and are superior to doors produced by hand carpentry.

Large nine-light windows, 1⅜ inches thick, opening size, 2 feet 8 inches by 3 feet 6 inches, are liberally provided for the ground floor. Ground floor windows are furnished with ventilation shields. A quick change of air can be made by lifting the windows back into the shields. The practical construction of the shields protects your stock from direct drafts.

Dormers over the driveway doors add materially to the good appearance of this barn.

In barns 24 feet wide, two 6-light windows are furnished for ends on ground floor; greater widths have 9-light windows.

Hardware, such as latches, bolts, screws, nails, etc., is included in the price; also sufficient paint for two coats, oxide red for the body and white for the trim. You may select other combinations from our paint page (see page 48). Ventilating systems, cupolas, barn equipment, silos, foundation material, etc., are not included in the price.

Floor plans. See pages 40 to 42 for sample floor plan arrangements. **Be sure to specify number of the floor plan that best suits your requirements.** Use the enclosed sketch sheet to outline your needs when changes are necessary and return for quotation on equipment.

Our "already cut" feature, together with **"ready made"** doors, sash, etc., furnished at the prices quoted, make it possible for you to get this high class Driveway Barn at a remarkable saving of time and labor. Free building plans, which are easy to understand, are furnished with every order.

QUALITY GUARANTEED

Order now and save money. **Mention size when ordering.**

Prices of the "Fairview" Modern Driveway Barn No. 2068, "Already Cut" and Fitted.

SIZE OF BARN			PRICE OF BARN			SIZE OF BARN			PRICE OF BARN		
Width, Feet	Length, Feet	Height From Sill to Eaves, Feet	With No. 1 Common Cypress Siding	With Select Cypress Siding	Haymow Capacity in Tons	Width, Feet	Length, Feet	Height From Sill to Eaves, Feet	With No. 1 Common Cypress Siding	With Select Cypress Siding	Haymow Capacity in Tons
24	38	12	$ 772.00	$ 818.00	24	34	50	16	$1,291.00	$1,421.00	72
24	44	12	865.00	905.00	28	34	56	16	1,395.00	1,543.00	80
24	50	12	954.00	991.00	32	34	62	16	1,501.00	1,651.00	89
24	56	12	1,032.00	1,077.00	36	34	74	16	1,710.00	1,882.00	106
28	38	12	847.00	936.00	33	34	86	16	1,919.00	2,110.00	123
28	44	12	986.00	1,031.00	39	34	98	16	2,128.00	2,340.00	140
28	50	12	1,079.00	1,126.00	44	36	38	16	1,175.00	1,241.00	61
28	56	12	1,162.00	1,222.00	49	36	44	16	1,289.00	1,359.00	70
28	62	12	1,262.00	1,315.00	55	36	50	16	1,403.00	1,478.00	80
30	38	12	946.00	989.00	37	36	56	16	1,525.00	1,597.00	90
30	44	12	1,039.00	1,084.00	43	36	62	16	1,631.00	1,714.00	99
30	50	12	1,131.00	1,180.00	49	36	74	16	1,782.00	1,958.00	118
30	56	12	1,224.00	1,276.00	55	36	86	16	2,090.00	2,188.00	138
30	62	12	1,318.00	1,373.00	60	36	98	16	2,319.00	2,425.00	157
30	74	12	1,509.00	1,564.00	72	36	104	16	2,353.00	2,551.00	166
32	38	14	1,027.00	1,081.00	45	40	44	16	1,389.00	1,454.00	81
32	44	14	1,130.00	1,187.00	52	40	56	16	1,152.00	1,707.00	103
32	50	14	1,231.00	1,292.00	59	40	62	16	1,665.00	1,833.00	114
32	56	14	1,333.00	1,399.00	66	40	74	16	1,988.00	2,086.00	136
32	62	14	1,443.00	1,584.00	73	40	86	16	2,238.00	2,337.00	158
32	74	14	1,641.00	1,719.00	87	40	98	16	2,474.00	2,587.00	180
32	86	14	1,846.00	1,885.00	101	40	110	16	2,719.00	2,841.00	202
34	38	16	1,128.00	1,253.00	54	40	122	16	2,962.00	3,091.00	224
34	44	16	1,246.00	1,314.00	63	40	134	16	3,205.00	3,345.00	247

"Already Cut" and Fitted. "Already Cut" and Fitted.

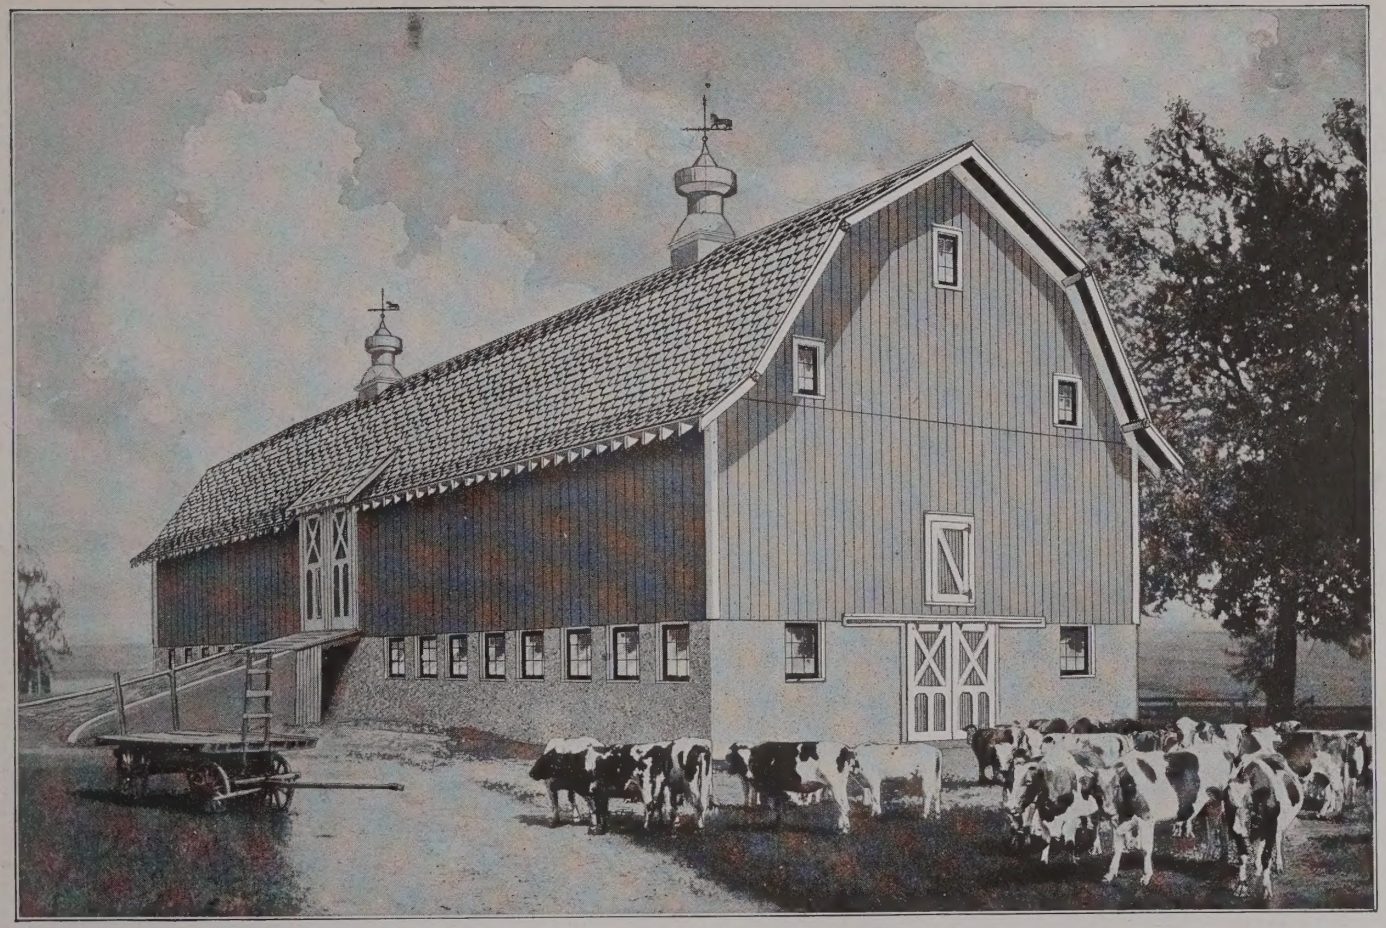

ALREADY CUT AND FITTED PRICE $1,138.00 AND UP

A Modern Bank Barn, Trussed Roof Construction, Vertical Siding.

A HILLY countryside lends itself very favorably to this type of barn. It permits of easy access to the mow floor with team and load.

The basement of this barn is of concrete, brick, stone, etc., and is raised to the height of the mow floor. Ground floor, height to ceiling, 8 feet 6 inches. No foundation material for the basement part is included in the price. As most of these barns have an earth wall on at least one side of the basement, windows for ground floor are only furnished for the two ends and one side.

This barn is of the trussed roof type shown on page 4. The trusses are to be bolted together to secure greatest strength. Necessary bolts are included in the price.

All framing lumber is of No. 1 Yellow Pine.

The outside walls are covered with Double V vertical siding of Cypress, "The Wood Eternal." This combination secures a very strong frame and outside walls that will withstand the weather a lifetime.

To make the roof good and strong, we furnish **tight fitting tongued and grooved sheathing boards** to be laid on the rafters and covered with **Fire-Chief Shingle Roll Roofing. Fire-Chief Roofing** is guaranteed by us for **seventeen years.** It resembles painted shingles.

Doors are made of Clear Cypress, "The Wood Eternal." For the ground floor we furnish a pair of sliding doors for each gable. A pair of large driveway doors leads to the mow. One of the wings of the driveway doors is furnished with a small built-in door for personal entrance to the mow. (See page 44.) These doors slide on Roll Rite Hangers, the highest priced hangers we handle. The small hinged door in one gable will be found very convenient. All doors are **"ready made"**—ready to hang in place and are superior to doors produced by hand carpentry.

Large windows, 1⅜ inches thick, with nine lights: opening size, 2 feet 8 inches by 3 feet 6 inches for ground floor. Ventilation shields are furnished. A quick change of air can be made by lifting the windows back into the shields. The practical construction of the shields protects your stock from direct drafts. Three windows, six lights, 1⅜ inches thick, for each gable; opening size, 2 feet 8 inches by 3 feet 6 inches.

Hardware, such as latches, bolts, screws, nails, etc., is included in the price, also sufficient **paint for two coats,** oxide red for the body and white for the trim. You may select other combinations from our paint page (see page 48). Ventilating systems, cupolas, barn equipment, silos, foundation material, etc., are not included in the price.

Floor Plans. See pages 40 to 42 for sample floor plan arrangements. **Be sure to specify number of the floor plan that best suits your requirements.** Use the enclosed sketch sheet to outline your needs when changes are necessary and return for quotation on equipment.

Our "already cut" feature, together with **"ready made"** doors, sash, etc., furnished at the prices quoted, make it possible for you to get this modern bank barn at a remarkable saving of money, time and labor. Free building plans, which are easy to understand, are furnished with every order.

This barn will appeal to everyone who wants a good and solid bank barn.

QUALITY GUARANTEED

Prices of the "Oneida" Modern Bank Barn No. 2063, "Already Cut" and Fitted.

SIZE OF BARN		Height From Sill to Eaves, Feet	PRICE OF BARN			SIZE OF BARN		Height From Sill to Eaves, Feet	PRICE OF BARN		
Width, Feet	Length, Feet		With No. 1 Common Cypress Siding	With Select Cypress Siding	Haymow Capacity in Tons	Width, Feet	Length, Feet		With No. 1 Common Cypress Siding	With Select Cypress Siding	Haymow Capacity in Tons
30	42	14	$1,138.00	$1,191.00	61	36	42	14	$1333.00	$1,394.00	77
30	56	14	1,375.00	1,516.00	81	36	56	14	1,605.00	1,672.00	102
30	70	14	1,612.00	1,680.00	101	36	70	14	1,878.00	1,934.00	127
30	84	14	1,848.00	1,924.00	121	36	84	14	2,150.00	2,231.00	153
30	98	14	2,084.00	2,153.00	141	36	98	14	2,424.00	2,517.00	178
32	42	14	1,194.00	1,249.00	71	36	112	14	2,696.00	2,797.00	204
32	56	14	1,442.00	1,505.00	95	36	126	14	2,967.00	3,079.00	229
32	70	14	1,691.00	1,763.00	118	36	140	14	3,241.00	3,360.00	255
32	84	14	1,938.00	2,018.00	142	40	42	14	1,441.00	1,509.00	92
32	98	14	2,187.00	2,275.00	166	40	56	14	1,734.00	1,910.00	123
32	112	14	2,436.00	2,533.00	189	40	70	14	2,015.00	2,111.00	154
34	42	14	1,256.00	1,313.00	72	40	84	14	2,319.00	2,411.00	185
34	56	14	1,516.00	1,582.00	96	40	98	14	2,612.00	2,713.00	216
34	70	14	1,776.00	1,851.00	120	40	112	14	2,904.00	3,013.00	246
34	84	14	2,037.00	2,119.00	144	40	126	14	3,195.00	3,314.00	277
34	98	14	2,269.00	2,389.00	168	40	140	14	3,489.00	3,615.00	308
34	112	14	2,556.00	2,657.00	192	40	154	14	3,780.00	3,915.00	339
34	126	14	2,817.00	2,927.00	215	40	168	14	4,074.00	4,217.00	370

"Already Cut" and Fitted. "Already Cut" and Fitted. "Already Cut" and Fitted.

NOTE—Special door opposite driveway doors on mow floor, opening size 6 x 12 feet, including Roll Rite Barn Door Hangers and Track and barn door latch, complete, $29.66 extra.

ALREADY CUT AND FITTED PRICE $831.00 AND UP

A Modern Timber Frame Barn, "Already Cut" and Fitted.

IN ALL sections of the country we have found a great number of admirers of this type of barn. It embodies all the good features of framing which always have been the pride of the building craft. Our architects have used skill in designing a frame for this barn that combines the strength of the solid timber construction of the olden days with modern requirements.

The framework is built up of 2-inch material to the desired strength. Girder posts are solid. The simple way in which the framing is joined and the manner in which the bracing and trussing is done secure the admiration of every builder.

This barn can be built with considerably less lumber and far less labor than the old style timber frame barn. Its strength and rigidity will meet all requirements. Ground floor height, 9 feet.

All framing lumber is No. 1 Yellow Pine.

The outside walls are covered with double V vertical siding of Cypress, "The Wood Eternal." This combination secures a very strong frame and outside walls that will withstand the weather for a lifetime.

To make the roof good and strong we furnish **tight fitting tongued and grooved sheathing boards** to cover the rafters, on which you lay **Fire-Chief Shingle Roll Roofing. Fire-Chief Roofing** is guaranteed by us for **seventeen years.** It resembles painted shingles.

Doors are made of Clear Cypress, "The Wood Eternal." Two pairs of spacious driveway doors, one pair on each side, and four sliding doors, two in each end, are furnished for the ground floor. One wing of the driveway doors is furnished with a smaller built-in door for personal entrance. (See page 44.) The doors slide on Roll Rite Hangers, the highest priced hangers we handle. A smaller hinged door in each end at the mow floor level is convenient for many purposes. All doors are **"ready made"**—ready to hang in place and are superior to doors produced by hand carpentry.

Large nine-light windows, opening size, 2 feet 8 inches by 3 feet 6 inches, and 1⅜ inches thick, are liberally provided for the ground floor. They are furnished with ventilation shields. A quick change of air can be made by lifting the windows back into the shields. The practical construction of the shields protects your stock from direct drafts.

In barns 24 feet wide two six-light windows are furnished for the ends on ground floor.

Hardware, such as latches, bolts, screws, nails, etc., is included in the price, also sufficient **paint for two coats,** oxide red for the body and white for the trim. You may select other combinations from our paint page (see page 48.) Ventilating systems, cupolas, barn equipment, silos, foundation material, etc., are not included in the price.

Floor Plans. See pages 40 to 42 for sample floor plan arrangements. **Be sure to specify number of the floor plan that best suits your requirements.** Use the enclosed sketch sheet to outline your needs when changes are necessary and return for quotation on equipment.

Our "already cut" feature, together with **"ready made"** doors, sash, etc., furnished at the prices quoted, make it possible for you to get this modern timber frame barn at a remarkable bargain and a saving of time and labor. Free building plans, which are easy to understand, are furnished with every order.

QUALITY GUARANTEED

Prices of the "Prairie Chief" Modern Timber Frame Barn No. 2064, "Already Cut" and Fitted.

SIZE OF BARN			PRICE OF BARN			SIZE OF BARN			PRICE OF BARN		
Width, Feet	Length, Feet	Height From Sills to Eaves, Feet	With No. 1 Common Cypress Siding	With Select Cypress Siding	Haymow, Capacity in Tons	Width, Feet	Length, Feet	Height From Sills to Eaves, Feet	With No. 1 Common Cypress Siding	With Select Cypress Siding	Haymow, Capacity in Tons
24	42	14	$ 831.00	$ 907.00	29	34	84	18	$1,932.00	$2,020.00	126
24	56	14	1,016.00	1,060.00	39	34	98	18	2,192.00	2,290.00	147
28	42	14	964.00	1,004.00	34	34	112	18	2,453.00	2,560.00	168
28	56	14	1,176.00	1,224.00	45	34	126	18	2,711.00	2,829.00	189
28	70	14	1,398.00	1,442.00	56	36	42	18	1,214.00	1,277.00	63
30	42	16	1,046.00	1,094.00	42	36	56	18	1,488.00	1,561.00	95
30	56	16	1,283.00	1,340.00	56	36	70	18	1,763.00	1,849.00	119
30	70	16	1,521.00	1,586.00	70	36	84	18	2,038.00	2,129.00	139
30	84	16	1,757.00	1,841.00	84	36	98	18	2,311.00	2,415.00	167
30	98	16	1,994.00	2,079.00	98	36	112	18	2,586.00	2,698.00	190
32	42	16	1,107.00	1,157.00	50	36	126	18	2,889.00	2,981.00	214
32	56	16	1,348.00	1,408.00	67	40	42	18	1,332.00	1,410.00	80
32	70	16	1,589.00	1,656.00	84	40	56	18	1,633.00	1,711.00	106
32	84	16	1,831.00	1,904.00	101	40	70	18	1,936.00	2,022.00	123
32	98	16	2,072.00	2,156.00	118	40	84	18	2,238.00	2,335.00	160
32	112	16	2,312.00	2,404.00	134	40	98	18	2,441.00	2,648.00	186
34	42	18	1,155.00	1,214.00	63	40	112	18	2,842.00	3,058.00	213
34	56	18	1,414.00	1,484.00	84	40	126	18	3,145.00	3,271.00	239
34	70	18	1,673.00	1,742.00	105	40	140	18	3,447.00	3,575.00	266

"Already Cut" and Fitted. "Already Cut" and Fitted.

ALREADY CUT AND FITTED PRICE $546.00 AND UP

An Inexpensive Modern Barn With Large Driveway or Threshing Floor. Braced Rafter Construction. "Already Cut" and Fitted.

HERE is a good, plain barn at a low price. It has a driveway, which can be used for threshing, baling of hay, storage of implements, etc. Both ends of the barn can be conveniently used as stables for horses or cattle. The driveway is open to the roof and the stables to both sides of the driveway are 8 feet 6 inches high. We believe that for a good plain and serviceable barn this arrangement can hardly be improved upon. The strong gambrel roof of this barn is self supporting and constructed as shown on page 3

All framing lumber is of No. 1 Yellow Pine.

The outside walls are sided with drop siding of Cypress, "The Wood Eternal." This combination secures a very strong frame and outside walls that will withstand the weather for a lifetime.

To make the roof good and strong, we furnish tight fitting sheathing boards, to be laid on the rafters and covered with Fire-Chief Shingle Roll Roofing, guaranteed by us for **seventeen years.** It resembles painted shingles.

Doors are made of Clear Cypress, "The Wood Eternal." For the ground floor two pairs of spacious Driveway Doors 56A5059, one pair on each side of the barn, are furnished, also four Dutch Doors 56A5060, 1⅝ inches thick, two in each end. For widths up to and including 30 feet only one of these Dutch doors for each end is furnished, also four Dutch Doors 56A5060, 1⅝ inches smaller built-in door for personal entrance; they slide on Roll Rite hangers, the best hangers we handle. All doors are **"ready made"**—ready to hang in place and are superior to doors produced by hand carpentry.

Four-light windows, 1⅜ inches thick, opening size 1 foot 10½ inches wide by 2 feet 9½ inches long, are provided for the ground floor.

Hardware, such as latches, bolts, screws, nails, etc., is included in the price, also sufficient paint for two coats, oxide red for the body and white for the trim. You may select other combinations from our paint page. (See page 48.) Ventilating systems, barn equipment and foundation material are not included in the price.

Floor Plans. See pages 40 to 42 for sample floor plan arrangements. **Be sure to specify number of the floor plan that best suits your requirements.** Use the enclosed sketch sheet to outline your needs when changes are necessary and return for quotation on equipment.

Our "already cut" feature, together with **"ready made"** doors, sash, etc., furnished at the prices quoted, make it possible for you to get this high class Colonial barn at a remarkable saving of time and labor. Free building plans which are easy to understand, are furnished with every order.

Order now and save money.

Be sure to mention size when ordering.

Prices of the "Colonial" Modern Barn No. 3006, "Already Cut" and Fitted.

SIZE OF BARN			PRICE OF BARN		
Width, Feet	Length, Feet	Ht. From Sill to Eaves, Ft.	No. 1 Common Cypress Siding	Select Cypress Siding	Haymow, Capacity in Tons
24	24	12	$ 546.00	$ 572.00	16
24	30	12	619.00	647.00	21
24	36	12	694.00	723.00	25
24	42	12	764.00	799.00	29
24	48	12	837.00	875.00	34
24	54	12	910.00	950.00	39
28	30	12	684.00	714.00	27
28	36	12	767.00	801.00	32
28	42	12	851.00	888.00	37
28	48	12	940.00	973.00	42
28	54	12	1,016.00	1,067.00	48
30	30	12	718.00	750.00	30
30	36	12	808.00	843.00	36
30	42	12	897.00	936.00	42
30	48	12	987.00	1,029.00	48
30	54	12	1,077.00	1,121.00	54
30	60	12	1,167.00	1,215.00	60
32	36	14	904.00	952.00	42
32	42	14	1,006.00	1,058.00	50
32	48	14	1,098.00	1,162.00	58
32	54	14	1,210.00	1,260.00	65

"Already Cut" and Fitted.

SIZE OF BARN			PRICE OF BARN		
Width, Feet	Length, Feet	Ht. From Sill to Eaves, Ft.	No. 1 Common Cypress Siding	Select Cypress Siding	Haymow, Capacity in Tons
32	60	14	$1,313.00	1,374.00	72
32	66	14	1,414.00	1,479.00	79
32	72	14	1,516.00	1,586.00	86
34	36	16	968.00	1,022.00	50
34	42	16	1,074.00	1,136.00	58
34	48	16	1,181.00	1,247.00	67
34	54	16	1,288.00	1,358.00	75
34	60	16	1,395.00	1,468.00	84
34	66	16	1,503.00	1,580.00	92
34	72	16	1,610.00	1,690.00	101
34	78	16	1,716.00	1,801.00	110
36	36	16	1,031.00	1,082.00	58
36	42	16	1,135.00	1,198.00	68
36	48	16	1,245.00	1,313.00	77
36	54	16	1,356.00	1,427.00	87
36	60	16	1,466.00	1,541.00	96
36	66	16	1,576.00	1,657.00	105
36	72	16	1,688.00	1,771.00	114
36	78	16	1,798.00	1,886.00	124
36	84	16	1,898.00	2,001.00	134

"Already Cut" and Fitted.

ALREADY CUT AND FITTED PRICE $962.00 AND UP

The "Economical Feeder" Modern Shed Barn. Greatest Floor Space at Lowest Cost. "Already Cut" and Fitted.

THIS modern barn with a lean-to, or shed on each side, is a desirable, low priced farm building, providing large floor space at a small expense.

The center of the barn is 8 feet 6 inches high to the lower edge of the joists, which are covered with tongued and grooved flooring, forming a large haymow above. No mow floor is provided for the sheds.

Solid posts and girders separate the center of the barn and the sheds. This gives a nearly unobstructed ground floor, which can be arranged to accommodate cattle, horses, sheep, etc.

All the framing lumber is of No. 1 Yellow Pine.

The outside walls are covered with drop siding of Cypress, "The Wood Eternal." This secures a very strong frame and outside walls that will last a lifetime.

To make the roof good and strong, we furnish **tight fitting, tongued and grooved sheathing boards** to be laid on the rafters and covered with **Fire-Chief Shingle Roll Roofing,** guaranteed by us for **seventeen years.** It resembles painted shingles.

Doors are made of clear Cypress, "The Wood Eternal." For the ground floor we furnish eight convenient Dutch doors; the haymow door in the front gable is hung on extra strong strap hinges. All doors are **"ready made"** —ready to hang in place and are superior to doors produced by hand carpentry.

Windows are four-light sash, opening size 1 foot 10½ inches by 2 feet 9½ inches.

Hardware, such as latches, bolts, screws, nails, etc., is included in the prices, also sufficient paint for two coats, oxide red for the body and white for the trim, or you may select other combinations from our paint page. (See page 48.) Ventilating systems, cupolas, barn equipment and foundation material are not included in the price.

The variety of sizes offered makes possible a selection that will suit almost any requirements. In ordering be sure to specify the size of the barn and the sheds, as shown on this page.

The height of these barns includes the height of the foundation, which is to be 2 feet above the grade level, to keep moisture from the woodwork.

Prices of "Economical Feeder" Modern Shed Barn No. 3024, "Already Cut" and Fitted.

Width, Feet	Length, Feet	Width of Main Barn, Feet	Width of Each Shed, Feet	Height of Barn From Grade Line to Eaves, Feet	Greatest Height of Shed From Grade Line to Eaves, Feet	Price, With No. 1 Common Cypress Siding	Price, With Select Cypress Siding	Width, Feet	Length, Feet	Width of Main Barn, Feet	Width of Each Shed, Feet	Height of Barn From Grade Line to Eaves, Feet	Greatest Height of Shed From Grade Line to Eaves, Feet	Price, With No. 1 Common Cypress Siding	Price, With Select Cypress Siding	Width, Feet	Length, Feet	Width of Main Barn, Feet	Width of Each Shed, Feet	Height of Barn From Grade Line to Eaves, Feet	Greatest Height of Shed From Grade Line to Eaves, Feet	Price, With No. 1 Common Cypress Siding	Price, With Select Cypress Siding
44	42	20	12	14	12½	$ 962.00	$1,004.00	52	60	24	14	14	13	$1,404.00	$1,462.00	60	66	32	14	16	13	$1,847.00	$1,921.00
44	48	20	12	14	12½	1,057.00	1,101.00	52	66	24	14	14	13	1,517.00	1,574.00	60	72	32	14	16	13	1,980.00	2,057.00
44	54	20	12	14	12½	1,152.00	1,200.00	52	72	24	14	14	13	1,624.00	1,685.00	60	78	32	14	16	13	2,114.00	2,199.00
44	60	20	12	14	12½	1,247.00	1,298.00	52	78	24	14	14	13	1,719.00	1,797.00	60	84	32	14	16	13	2,249.00	2,338.00
44	66	20	12	14	12½	1,344.00	1,397.00	56	54	24	16	14	13½	1,345.00	1,398.00	60	90	32	14	16	13	2,383.00	2,475.10
48	42	20	14	14	13	993.00	1,036.00	56	60	24	16	14	13½	1,458.00	1,515.00	62	60	30	16	16	13½	1,675.00	1,747.00
48	48	20	14	14	13	1,091.00	1,137.00	56	66	24	16	14	13½	1,571.00	1,629.00	62	66	30	16	16	13½	1,801.00	1,882.00
48	54	20	14	14	13	1,190.00	1,238.00	56	72	24	16	14	13½	1,683.00	1,745.00	62	72	30	16	16	13½	1,934.00	2,015.00
48	60	20	14	14	13	1,288.00	1,339.00	56	78	24	16	14	13½	1,793.00	1,860.00	62	78	30	16	16	13½	2,063.00	2,147.00
48	66	20	14	14	13	1,386.00	1,441.00	56	84	24	16	14	13½	1,909.00	2,019.00	62	84	30	16	16	13½	2,192.00	2,289.00
48	42	24	12	14	12½	1,049.00	1,095.00	58	60	30	14	16	13	1,625.00	1,697.00	62	90	30	16	16	13½	2,321.00	2,414.00
48	48	24	12	14	12½	1,156.00	1,205.00	58	66	30	14	16	13	1,751.00	1,825.00	64	60	32	16	16	13½	1,762.00	1,836.00
48	54	24	12	14	12½	1,262.00	1,314.00	58	72	30	14	16	13	1,874.00	1,947.00	64	66	32	16	16	13½	1,902.00	1,980.00
48	60	24	12	14	12½	1,367.00	1,423.00	58	78	30	14	16	13	1,999.00	2,081.00	64	72	32	16	16	13½	2,039.00	2,121.00
48	66	24	12	14	12½	1,473.00	1,530.00	58	84	30	14	16	13	2,125.00	2,211.00	64	78	32	16	16	13½	2,178.00	2,265.00
52	48	24	14	14	13	1,191.00	1,240.00	58	90	30	14	16	13	2,248.00	2,340.00	64	84	32	16	16	13½	2,317.00	2,407.00
52	54	24	14	14	13	1,300.00	1,352.00	60	60	32	14	16	13	1,713.00	1,786.00	64	90	32	16	16	13½	2,454.00	2,549.00

Low Priced Modern "Pioneer" Barn No. 3008, "Already Cut" and Fitted.

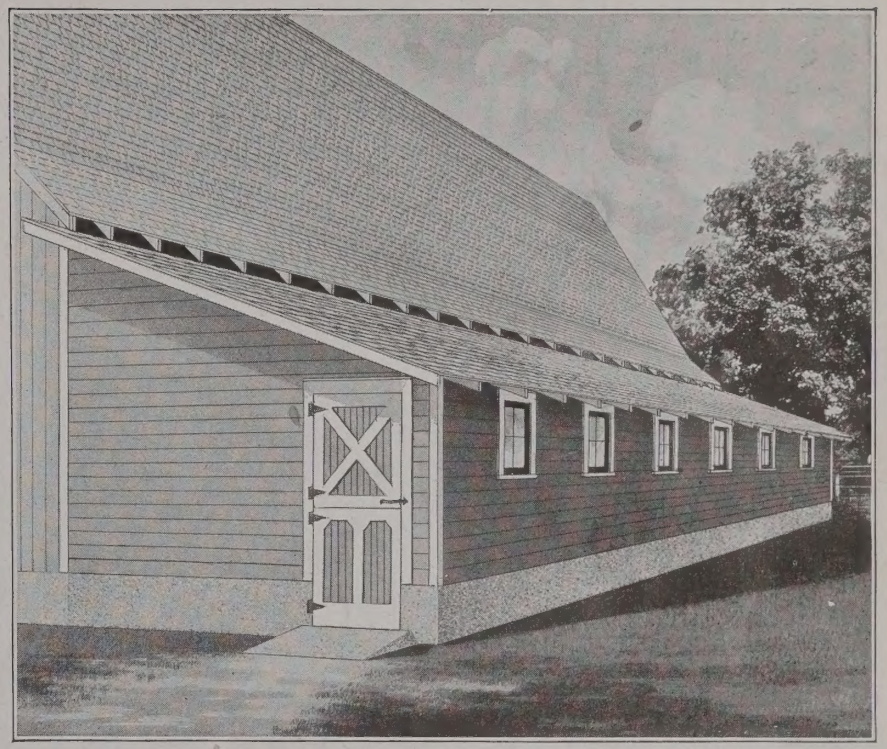

Modern Shed or Lean-To No. 3003, "Already Cut" and Fitted.

SIZE OF BARN			PRICE OF BARN		
Width, Feet	Lgth., Feet	Height From Sill to Eaves, Feet	With No. 1 Common Cypress Siding	With Select Cypress Siding	Haymow Capacity, Tons
20	24	12	$ 473.00	$ 499.00	12
20	30	12	542.00	571.00	15
20	36	12	611.00	642.00	18
20	42	12	679.00	714.00	21
24	24	12	530.00	559.00	14
24	30	12	609.00	634.00	18
24	36	12	688.00	724.00	21
24	42	12	767.00	805.00	25
24	48	12	845.00	886.00	29
30	30	14	697.00	788.00	27
30	36	14	845.00	893.00	32
30	42	14	942.00	985.00	37
30	48	14	1,036.00	1,094.00	44
30	54	14	1,132.00	1,193.00	49
30	60	14	1,230.00	1,293.00	54
30	66	14	1,324.00	1,393.00	60
32	36	14	895.00	941.00	43
32	42	14	1,003.00	1,052.00	50
32	48	14	1,105.00	1,161.00	57
32	54	14	1,206.00	1,271.00	64
32	60	14	1,314.00	1,380.00	72
32	66	14	1,420.00	1,490.00	79
32	72	14	1,565.00	1,638.00	86
32	78	14	1,631.00	1,708.00	93

THE "Pioneer" Barn can be found in nearly all sections of the country. It is low in price and strongly constructed.

This barn is to be erected on a 2-foot concrete or masonry foundation. The ceiling is 8 feet 6 inches high.

All framing lumber is of No. 1 Yellow Pine.

The outside walls are sided with drop siding of Cypress, "The Wood Eternal." This combination secures a very strong frame and outside walls that will withstand the weather for a lifetime.

To make the roof good and strong, we furnish **tight fitting tongued and grooved sheathing boards** to be laid on the rafters and covered with **Fire-Chief Shingle Roll Roofing,** guaranteed by us for **seventeen years.** It resembles painted shingles.

Doors are made of Clear Cypress and are **"ready made."** Four Dutch doors and one gable hay door are furnished.

Four-light barn sash, opening size 1 foot 10½ inches by 2 feet 9½ inches, are furnished.

Hardware, such as latches, bolts, screws, nails, etc., is included in the price; also sufficient paint for two coats, oxide red for the body and white for the trim. You may select other combinations from our paint page. (See page 48.) Ventilating systems, cupolas, barn equipment, feed racks and foundation material not included.

Free building plans, which are easy to understand, are furnished with every order.

Be sure to give size when ordering.

AN ECONOMICAL way to increase the size of a barn is to add a shed or lean-to. We offer a variety of widths in such sheds at low prices.

They are designed to fit against the side of any barn, the wall of the barn to which they are to be attached to form the roof support.

Our sheds are to be erected on a 2-foot foundation of concrete or masonry to keep out the moisture. (Material for foundation not included in the price.) Foundation included in heights shown below.

All the framing lumber, roof boards, drop siding and window frames are **"already cut" and fitted.** Doors are **"ready made"**—ready to hang in place and are superior to those produced by hand carpentry.

Windows are four-light sash, opening size 1 foot 10½ inches by 2 feet 9½ inches. The roof is to be covered with **Fire-Chief Shingle Roll Roofing,** which resembles painted shingles, and is guaranteed by us for **seventeen years.**

All hardware and sufficient paint for two coats are also included, oxide red for the body and white for the trim. You may select other combinations from our paint page. (See page 48.)

We highly recommend these sheds as a valuable addition to your barn.

Width, Feet	Greatest Height From Grade Line, Feet	Height on Low Side From Grade Line, Ft.	Price, With No. 1 Common Cypress Siding		Price, With Select Cypress Siding	
			For Sheds 20 Feet Long	For Every Additional Foot in Length, ADD	For Sheds 20 Feet Long	For Every Additional Foot in Length, ADD
12	12½	9	$116.00	$3.26	$120.00	$3.48
14	13	9	126.00	3.60	133.00	3.69
16	13½	9	136.00	3.91	144.00	4.04
18	14	9	145.00	4.21	155.00	4.35

ALREADY CUT AND FITTED PRICE $1,265.00 AND UP

A Modern Feeder's Barn, With a Gable Roof and Vertical Siding.

THIS Feeder Barn permits of a variety of uses. The large storage capacity makes it especially desirable where beef cattle are fattened during the Winter, to be sold in the Spring. The whole center of the barn can be filled with hay, roughage, etc., down to the ground. When this total space is not required, easy changes can be made for the storage of grain, etc., by building in bins or by flooring over part or all of the center of the barn. We make this barn in two widths, 60 feet and 52 feet. The interior provides for the feeding of loose cattle in the two side wings of the barn. Ground floor height in side wings, 8 feet 6 inches.

The center is separated from the side wings by a 5-foot partition. For the side wings a mow floor is furnished and a door at the level of the mow floor in each end. You will appreciate the convenience of this arrangement.

This barn is of the plank frame construction and has a straight gable roof.

All framing lumber is of No. 1 Yellow Pine.

The outside walls are covered with double V vertical siding of Cypress, "The Wood Eternal." This combination secures a very strong frame and outside walls that will withstand the weather for a lifetime.

To make the roof good and strong we furnish **tight fitting tongued and grooved sheathing boards** to be laid on the rafters and covered with **Fire-Chief Shingle Roll Roofing. Fire-Chief Roofing** is guaranteed by us for **seventeen years.** It resembles painted shingles.

Doors are made of Clear Cypress, "The Wood Eternal." Four pairs of sliding doors for the side wings are furnished, two pairs for each end of the barn, and one pair of large driveway doors, leading to the center of the barn. Driveway doors are furnished with built-in hinged door in one wing (see page 44). Over the driveway door a pair of sliding hay doors is furnished for one end. All these doors slide on Roll Rite Hangers, the highest priced hangers we handle. Four smaller hinged doors are furnished at the mow level over the sliding doors of the side wings. They are of great convenience. All doors are **"ready made"**—ready to hang in place—and are superior to doors produced by hand carpentry.

Four-light barn sash, opening size 1 foot 10½ inches by 2 feet 9½ inches, are furnished for the sides of the barn.

Hardware, such as latches, bolts, screws, nails, etc., is included in the price; also sufficient **paint for two coats,** oxide red for the body and white for the trim. You may select other combinations from our paint page (see page 48). Ventilating systems, cupolas, barn equipment, feed racks, silos, foundation material, etc., are not included in the price.

Floor Plans. See pages 40 to 42 for sample floor plan arrangements. **Be sure to specify number of the floor plan that best suits your requirements.** Use the enclosed sketch sheet to outline your needs when changes are necessary, and return for quotation on equipment.

Our "already cut" feature, together with **"ready made"** doors, sash, etc., furnished at the prices quoted, make it possible for you to get this high class Feeder Barn at a remarkable saving of time, money and labor. Free building plans, which are easy to understand, are furnished with every **order.**

This barn is a bargain at the prices quoted. **Be sure to give size when ordering.**

QUALITY GUARANTEED

Prices of "Gable Feeder" Modern Feeder's Barn No. 2065, "Already Cut" and Fitted.

SIZE OF BARN			PRICE OF BARN		
Width, Feet	Length, Feet	Height From Sill to Eaves, Feet	With No. 1 Common Cypress Siding	With Select Cypress Siding	Hay Mow Capacity in Tons
52	40	12	$1,265.00	$1,309.00	60
52	48	12	1,415.00	1,471.00	72
52	56	12	1,548.00	1,625.00	84
52	64	12	1,715.00	1,778.00	96
52	72	12	1,866.00	2,012.00	108
52	80	12	2,016.00	2,087.00	120
60	56	12	1,767.00	1,840.00	115
60	64	12	1,932.00	2,008.00	131
60	72	12	2,096.00	2,177.00	148
60	80	12	2,260.00	2,345.00	164
60	88	12	2,424.00	2,579.00	180
60	96	12	2,587.00	2,682.00	197

"Already Cut" and Fitted. "Already Cut" and Fitted.

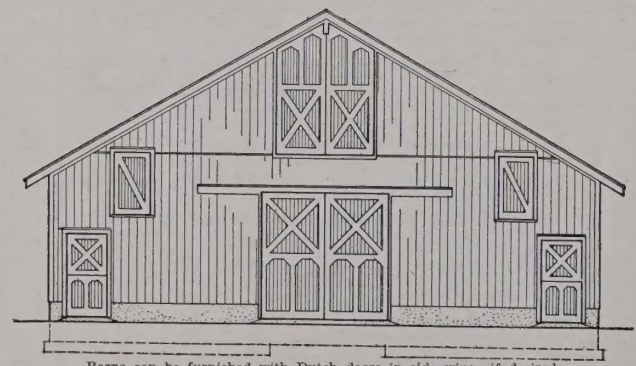

Barns can be furnished with Dutch doors in side wings if desired.

ALREADY CUT AND FITTED PRICE **$1,335.00 AND UP**

A Feeder's Barn, With a Gambrel Roof and Vertical Siding

THIS Feeder's Barn provides an abundance of loft room for the storage of hay, roughage, etc. The feature of the gambrel roof will appeal to you. The proportions of this Feeder's Barn are practical. They provide ample space for all requirements. This barn resembles the gable roof Feeder's Barn shown on the preceding page. Only high class material is furnished.

This barn is of the plank frame construction and has a gambrel roof. The interior provides for the feeding of loose cattle in the two side wings of the barn. Ground floor height in side wings, 8 feet.

The center is separated from the side wings by a 5-foot partition. A mow floor is furnished for the side wings and there is a door at the level of the mow floor in each end. You will appreciate the convenience of this arrangement.

All framing lumber is of No. 1 Yellow Pine.

The outside walls are covered with double V vertical siding of Cypress, "The Wood Eternal." This combination secures a very strong frame and outside walls that will withstand the weather for a lifetime.

To make the roof good and strong, we furnish **tight fitting tongued and grooved sheathing boards,** to be laid on the rafters and covered with **Fire-Chief Shingle Roll Roofing. Fire-Chief Roofing** is guaranteed by us for **seventeen years.** It resembles painted shingles.

Doors are made of Clear Cypress, "The Wood Eternal." Four pairs of sliding doors for the side wings are furnished, two pairs for each end of the barn. In addition, one pair of large driveway doors, with built-in hinged door in one wing (see page 44), leading to the center of the barn. Over the driveway door one pair of sliding hay doors is furnished. All these doors slide on Roll Rite Hangers, the highest priced hangers we handle. Four small hinged doors are furnished at the mow level over the sliding doors of the side wings. They are of great convenience. All doors are **"ready made"**—ready to hang in place and are superior to doors made by hand carpentry.

Four-light barn sash, opening size, 1 foot 10½ inches by 2 feet 9½ inches, are furnished for the sides of the barn.

Hardware, such as latches, bolts, screws, nails, etc., is included in the price, also sufficient **paint for two coats,** oxide red for the body and white for the trim. You may select other combinations from our paint page (see page 48). Ventilating systems, cupolas, barn equipment, feed racks, silos, foundation material, etc., are not included in the price.

Floor Plans. See pages 40 to 42 for sample floor plan arrangements. **Be sure to specify number of the floor plan that best suits your requirements.** Use the enclosed sketch sheet to outline your needs when changes are necessary and return for quotation on equipment.

Our "already cut" feature, together with **"ready made"** doors, sash, etc., furnished at the prices quoted, make it possible for you to get this high class Feeder's Barn at a remarkable saving of time and labor. Free building plans, which are easy to understand, are furnished with every order.

QUALITY GUARANTEED

Order Now and Save Money. Be Sure to Give Size!

Prices of "Gambrel Feeder" Modern Feeder's Barn No. 2066, "Already Cut" and Fitted.

SIZE OF BARN			PRICE OF BARN		
Width, Feet	Length, Feet	Height From Sill to Eaves, Feet	With No. 1 Common Cypress Siding "Already Cut" and Fitted.	With Select Cypress Siding "Already Cut" and Fitted.	Hay-mow Capacity in Tons
52	40	10	$1,335.00	$1,391.00	67
52	48	10	1,492.00	1,552.00	80
52	56	10	1,651.00	1,711.00	93
52	64	10	1,804.00	1,872.00	106
52	72	10	1,964.00	2,033.00	119
52	80	10	2,122.00	2,193.00	132
60	56	10	1,875.00	1,944.00	126
60	64	10	2,053.00	2,125.00	144
60	72	10	2,231.00	2,304.00	162
60	80	10	2,410.00	2,491.00	180
60	88	10	2,583.00	2,665.00	198
60	96	10	2,761.00	2,847.00	216

Barns can be furnished with Dutch Doors in side wings if desired.

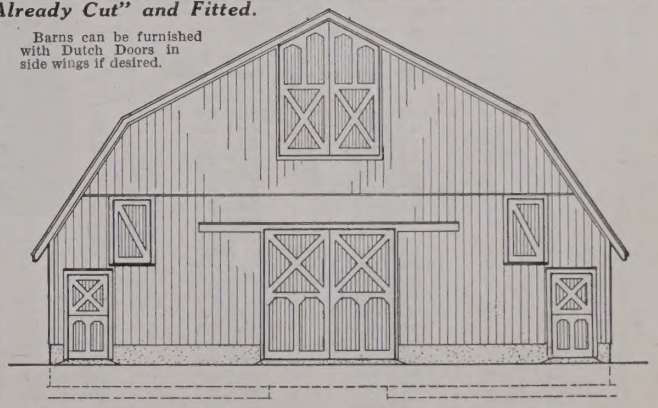

ALREADY CUT AND FITTED PRICE $418.00 AND UP

A Low Priced Modern One-Story Barn, "Already Cut" and Fitted.

THIS barn is designed to meet the requirements of an inexpensive **modern** dairy barn or a general purpose barn. As a sheep barn it is very practical. It may be used as an independent unit or built onto an old barn, as an "annex." **This solves the problem of a modern sanitary addition at the least expense.** Only good quality of material is furnished for this barn.

All framing lumber is of No. 1 Yellow Pine.

The outside walls are covered with drop siding of Cypress, "The Wood Eternal." This combination secures a very strong frame and outside walls that will withstand the weather for a lifetime.

To make the roof good and strong, we furnish **tight fitting tongued and grooved sheathing boards** to be laid on the rafters and covered with **Fire-Chief Shingle Roll Roofing. Fire-Chief Roofing** is guaranteed by us for **seventeen years.** It resembles painted shingles.

Two pairs of sliding doors are provided, one pair for each end. They are made of Clear Cypress, "The Wood Eternal," and slide on Roll Rite Hangers, the most expensive hangers we handle. These doors are **"ready made"**—ready to hang in place and are superior to doors produced by hand carpentry.

Large nine-light windows, 1⅜ inches thick, opening size, 2 feet 8 inches by 3 feet 6 inches, provide plenty of light and air. Windows are equipped with ventilation shields. A quick change of air can be made by lifting the windows back into the shields. The practical construction of the shields protects your stock from direct drafts.

Hardware, such as latches, bolts, screws, nails, etc., is included in the price, also sufficient **paint for two coats,** oxide red for the body and white for the trim. You may select other combinations from our paint page (see page 48). Ventilating systems, cupolas, barn equipment, silos, foundation material, etc., are not included in the price.

Floor Plans. See pages 40 to 42 for sample floor plan arrangements. **Be sure to specify number of floor plan that best suits your requirements.** Use the enclosed sketch sheet to outline your needs when changes are necessary and return for quotation on equipment.

Be sure to notice that all our framing lumber is already cut and fitted, that doors are all **made and ready to hang,** that our **roofing is guaranteed for seventeen years. Take no substitute for Cypress Siding. When ordering be sure to give size.**

QUALITY GUARANTEED

Prices of Modern Annex Barn No. 2067, "Already Cut" and Fitted.

SIZE OF BARN			PRICE OF BARN			SIZE OF BARN			PRICE OF BARN		
Width, Feet	Length, Feet	Height From Sill to Eaves, Feet	With No. 1 Common Cypress Siding	With Select Cypress Siding		Width, Feet	Length, Feet	Height From Sill to Eaves, Feet	With No. 1 Common Cypress Siding	With Select Cypress Siding	
30	32	6	$418.00	$438.00	"Already Cut" and Fitted.	34	68	6	$ 762.00	$ 793.00	"Already Cut" and Fitted.
30	38	6	473.00	491.00		34	74	6	817.00	848.00	
30	44	6	524.00	544.00		34	80	6	871.00	904.00	
30	50	6	575.00	597.00		34	92	6	979.00	1,015.00	
30	56	6	626.00	650.00		34	98	6	1,034.00	1,072.00	
30	62	6	678.00	703.00		34	104	6	1,088.00	1,127.00	
32	32	6	435.00	453.00		34	122	6	1,250.00	1,294.00	
32	38	6	489.00	508.00		36	38	6	525.00	546.00	
32	44	6	542.00	561.00		36	44	6	582.00	606.00	
32	50	6	595.00	616.00		36	50	6	640.00	666.00	
32	56	6	647.00	671.00		36	56	6	696.00	729.00	
32	62	6	692.00	726.00		36	62	6	755.00	783.00	
32	68	6	753.00	781.00		36	74	6	871.00	903.00	
32	74	6	806.00	835.00		36	86	6	985.00	1,022.00	
32	80	6	859.00	882.00		36	98	6	1,099.00	1,140.00	
34	38	6	491.00	515.00		36	104	6	1,158.00	1,199.00	
34	44	6	518.00	569.00		36	110	6	1,211.00	1,259.00	
34	50	6	600.00	625.00		36	122	6	1,331.00	1,377.00	
34	56	6	655.00	681.00		36	134	6	1,446.00	1,497.00	
34	62	6	708.00	737.00							



Barns can be furnished with side door arrangement if desired.

Small Barns

WE ILLUSTRATE on this page three popular small barns. For low cost, solid construction and general appearance these barns are unexcelled.

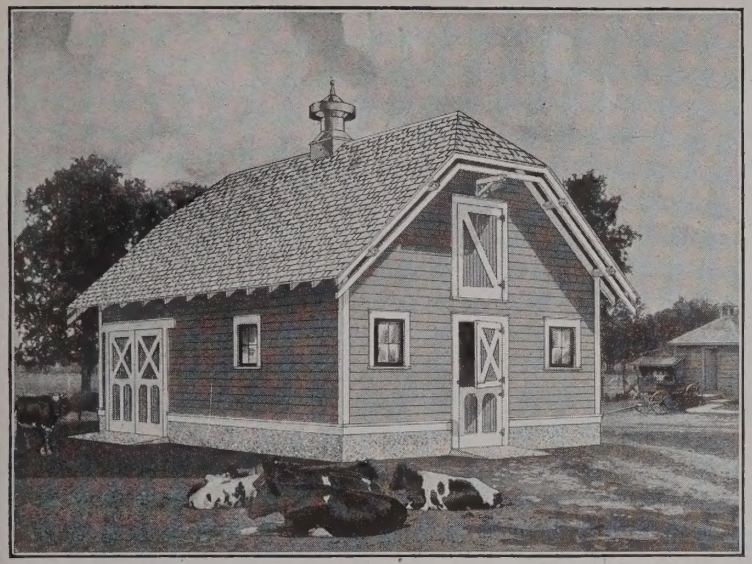



Floor Plan Suitable for Barn No. 3010.

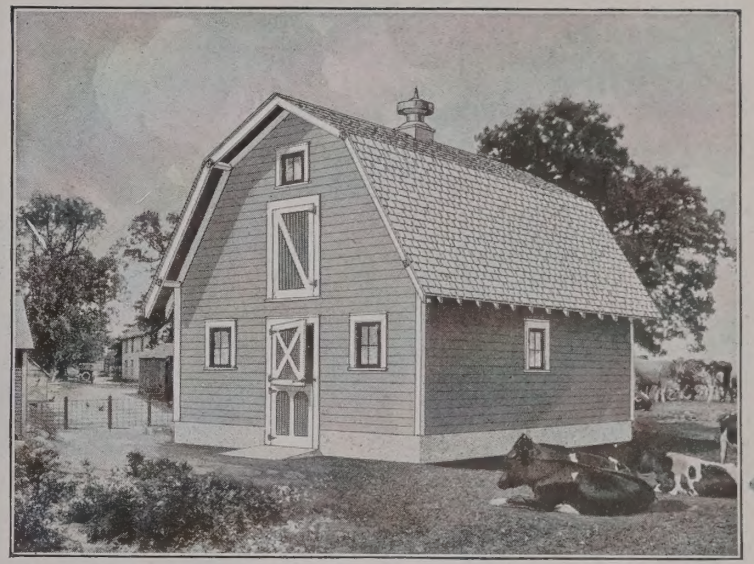

The "Star" Modern Barn No. 3009, "Already Cut" and Fitted.

Prices of the "Star" Barn No. 3009, "Already Cut" and Fitted.

Width, Feet	Length, Feet	Height From Sills to Eaves, Feet	Price With No. 1 Common Cypress Siding	Price With Select Cypress Siding	Haymow Capacity, Tons
20	20	10	**$321.00**	**$343.00**	7
20	24	10	**357.00**	**381.00**	8½
20	28	10	**392.00**	**418.00**	10
20	32	10	**429.00**	**456.00**	11½

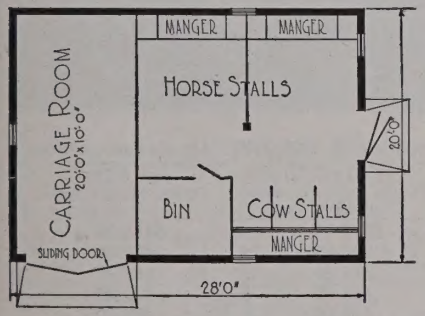

Floor Plan Suitable for Barns No. 3009 and No. 3011.

We offer each style in several lengths to meet most demands. Greater lengths quoted on request.

The floor arrangements suggested on this page can be changed to meet your requirements, and we will quote you a price including equipment on receipt of your sketch showing what you need.

All barns are to be erected on a foundation of concrete or masonry, extending 18 inches above the grade line. Ceiling height, 8 feet 6 inches.

The "Crescent" Modern Barn No. 3011, "Already Cut" and Fitted.

Prices of the "Crescent" Barn No. 3011, "Already Cut" and Fitted.

Width, Feet	Length, Feet	Height From Sills to Eaves, Feet	Price With No. 1 Common Cypress Siding	Price With Select Cypress Siding	Haymow Capacity, Tons
20	20	10	**$370.00**	**$390.00**	10
20	24	10	**413.00**	**433.00**	12
20	28	10	**456.00**	**478.00**	14
20	32	10	**499.00**	**521.00**	16

The "Keystone" Modern Barn No. 3010, "Already Cut" and Fitted.

Prices of the "Keystone" Barn No. 3010, "Already Cut" and Fitted.

Width, Feet	Length, Feet	Height From Sills to Eaves, Feet	Price With No. 1 Common Cypress Siding	Price With Select Cypress Siding	Haymow Capacity, Tons
20	20	10	**$341.00**	**$365.00**	8¼
20	24	10	**384.00**	**401.00**	10
20	28	10	**421.00**	**452.00**	12½
20	32	10	**456.00**	**493.00**	14

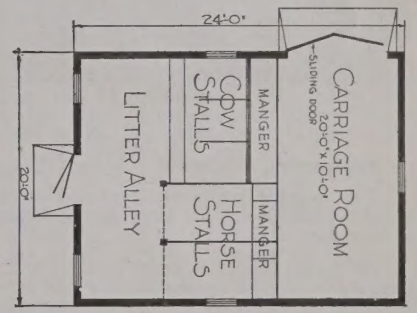

Floor Plan Suitable for Barns No. 3009 and No. 3011.

WHAT YOU GET:

No. 1 Yellow Pine framing lumber; Cypress, "The Wood Eternal," drop siding for the outside walls; tight fitting sheathing boards for the roof, to be covered with Fire-Chief Shingle Roll Roofing, guaranteed by us for seventeen years; Clear Cypress doors, "ready made," and windows; all hardware and enough paint for two coats, which may be selected from our paint page. (See page 48.) Foundation material, interior equipment and cupolas are not included in the price.

All the framing lumber is **"already cut"** and fitted. Doors are **"ready made"**—ready to hang in place, all of which makes for a good strong barn and a saving in time, labor and money.

ALREADY CUT AND FITTED PRICE **$273.00 = AND UP**

The Famous "Sunlight" Hog House, "Already Cut" and Fitted.

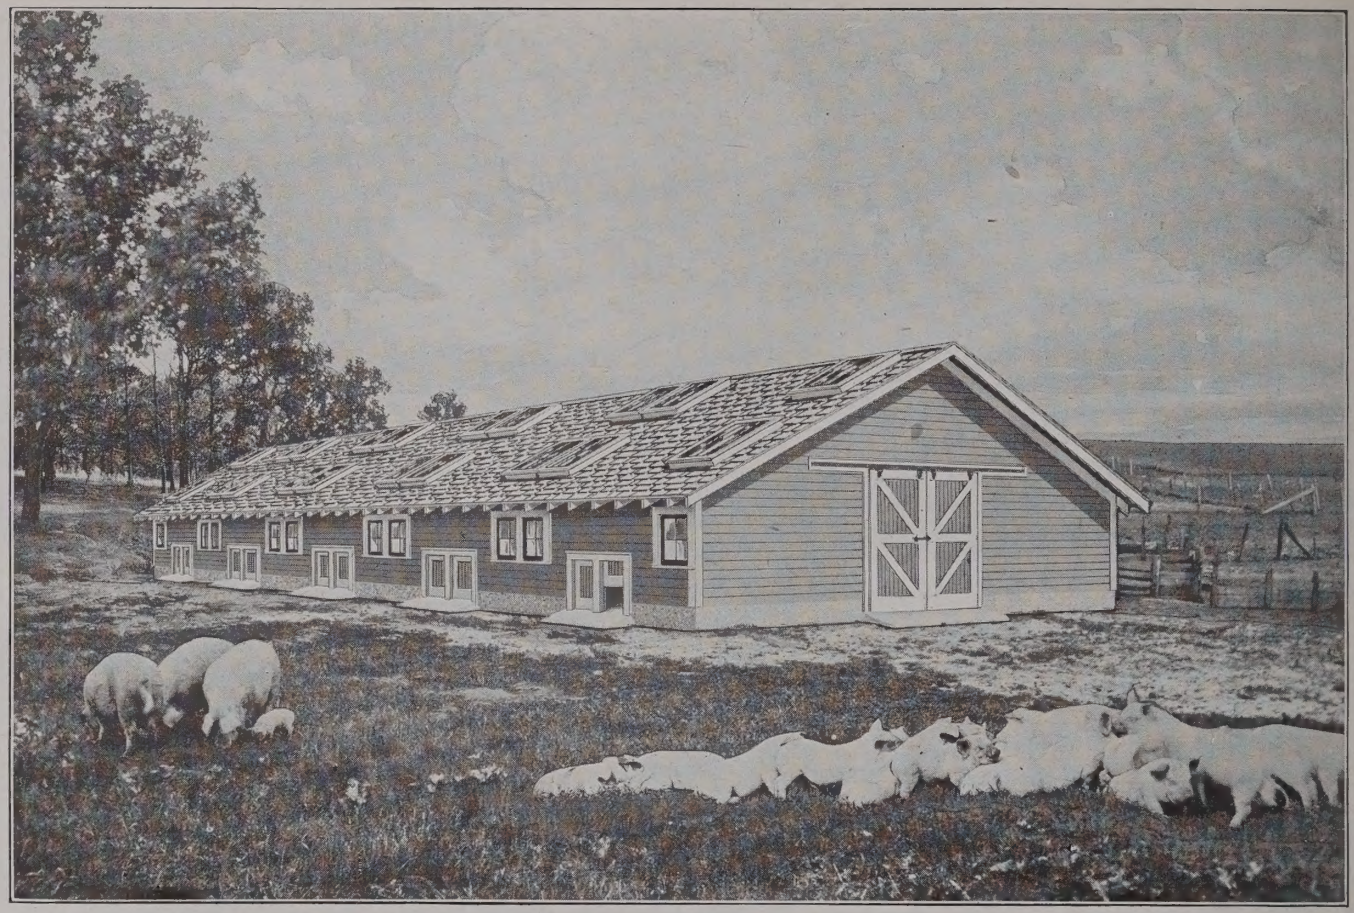

THIS is a good hog house designed to provide suitable quarters for Winter farrowing. The young pigs can be turned into the early pastures, and will soon be ready for an early market. The difference in the prices obtainable is well known to the average breeder, which consideration has prompted us to adopt and recommend our "Sunlight" Hog House. It fully deserves its name. It permits the sunshine around March 1st, the usual time of Winter farrowing, to reach the pens on both sides of the building.

This hog house is to be built with its ridge running East and West. On the South side two rows of large roof windows permit of a nearly continuous flow of sunshine on the floor of the pens. In the South wall, a third row of windows is provided, directly opposite the nests.

The outside pen doors slide up and down, and may be easily opened by pulling a rope from the center aisle. This convenience saves many a step and the unpleasant task of walking into the pens or outside of the hog house in bad weather.

If pen doors are wanted for rear side, add $1.75 each.

We furnish this type of hog house 24 feet wide and 20 feet wide. Twenty-four feet wide hog houses have double sliding doors at each end, which are hung on Roll Rite Hangers, the best we handle, and lead to an alley which is 8 feet wide. Pens to be 8 feet deep and 6 feet wide. The hog house 20 feet wide provides for one single sliding door at each end hung on Roll Rite Hangers. Here the alley is only 4 feet wide.

All framing lumber is of No. 1 Yellow Pine.

The outside walls are covered with drop siding of Cypress, "The Wood Eternal." This combination secures a very strong frame and outside walls that will withstand the weather for a lifetime.

To make the roof good and strong, we furnish **tight fitting tongued and grooved sheathing boards** to be laid on the rafters and covered with **Fire-Chief Shingle Roll Roofing. Fire-Chief Roofing** is guaranteed by us for **seventeen years.** It resembles painted shingles.

Hardware, such as latches, bolts, screws, nails, etc., is included in the price, also sufficient **paint** for outside walls **for two coats,** oxide red for the body and white for the trim. You may select other combinations from our paint page (see page 48). Pen partitions are not included in the price. On page 46 you will find desirable pen partitions which are especially recommended.

QUALITY GUARANTEED

Be sure to notice that all our framing lumber is already cut and fitted, that doors are all **made and ready to hang,** that our roofing is guaranteed for seventeen years. **Take no substitute for cypress siding. Be sure to give size when ordering Hog House.**

Prices of Modern "Sunlight" Hog Houses No. 264A2072 and No. 264A2073 "Already Cut" and Fitted.

No.	Size of Hog House		Prices, "Already Cut" and Fitted.			
	Width	Length	With No. 1 Common Cypress Siding		With Select Cypress Siding	
264A2073	5 Feet 5 Inches.	24	$273.00	and Fitted.	$285.00	and Fitted.
264A2073		30	324.00		334.00	
264A2073		36	374.00		387.00	
264A2073		42	424.00		439.00	
264A2073		48	475.00		490.00	
264A2073		54	524.00		543.00	
264A2073		60	575.00		594.00	
264A2072	Sill to Eaves	24	346.00	"Already Cut"	359.00	"Already Cut"
264A2072		30	400.00		416.00	
264A2072		36	456.00		472.00	
264A2072		42	510.00		529.00	
264A2072		48	566.00		585.00	
264A2072		54	622.00		641.00	
264A2072		60	676.00		696.00	
264A2072		72	785.00		808.00	

ALREADY CUT AND FITTED PRICE **$242.00 AND UP**

The "Monitor" Hog House, "Already Cut" and Fitted.

MOST people are familiar with this style of hog house and know that it is a dependable type. We introduce only such styles of hog houses as have proved serviceable. The "Monitor" Hog House has some very good features.

It should be built with the ridge running east and west to get a southern exposure, which will permit the sun's rays to penetrate every nook and corner. This applies during the early Springtime, when sunshine is equally as necessary as feed for the Winter farrowing. In Summer, when the sun rises high in the sky, the hottest rays of the noontime will little affect the interior of a hog house of this type. Instead, during the hot spell of the year, the hog house will be a welcome retreat for your swine during midday hours, for the perpendicular rays of the sun reflect but little upon the windows of the structure.

The floor arrangement provides for pens 8 feet deep and 6 feet wide, outside measure.

All framing lumber is of No. 1 Yellow Pine.

The outside walls are covered with drop siding of Cypress, "The Wood Eternal," which secures a very strong frame and outside walls that will withstand the weather for a lifetime.

To make the roof good and strong we furnish **tight fitting tongued and grooved sheathing boards** to be laid on the rafters and covered with **Fire-Chief Shingle Roll Roofing. Fire-Chief Roofing** is guaranteed by us for **seventeen years.** It resembles painted shingles.

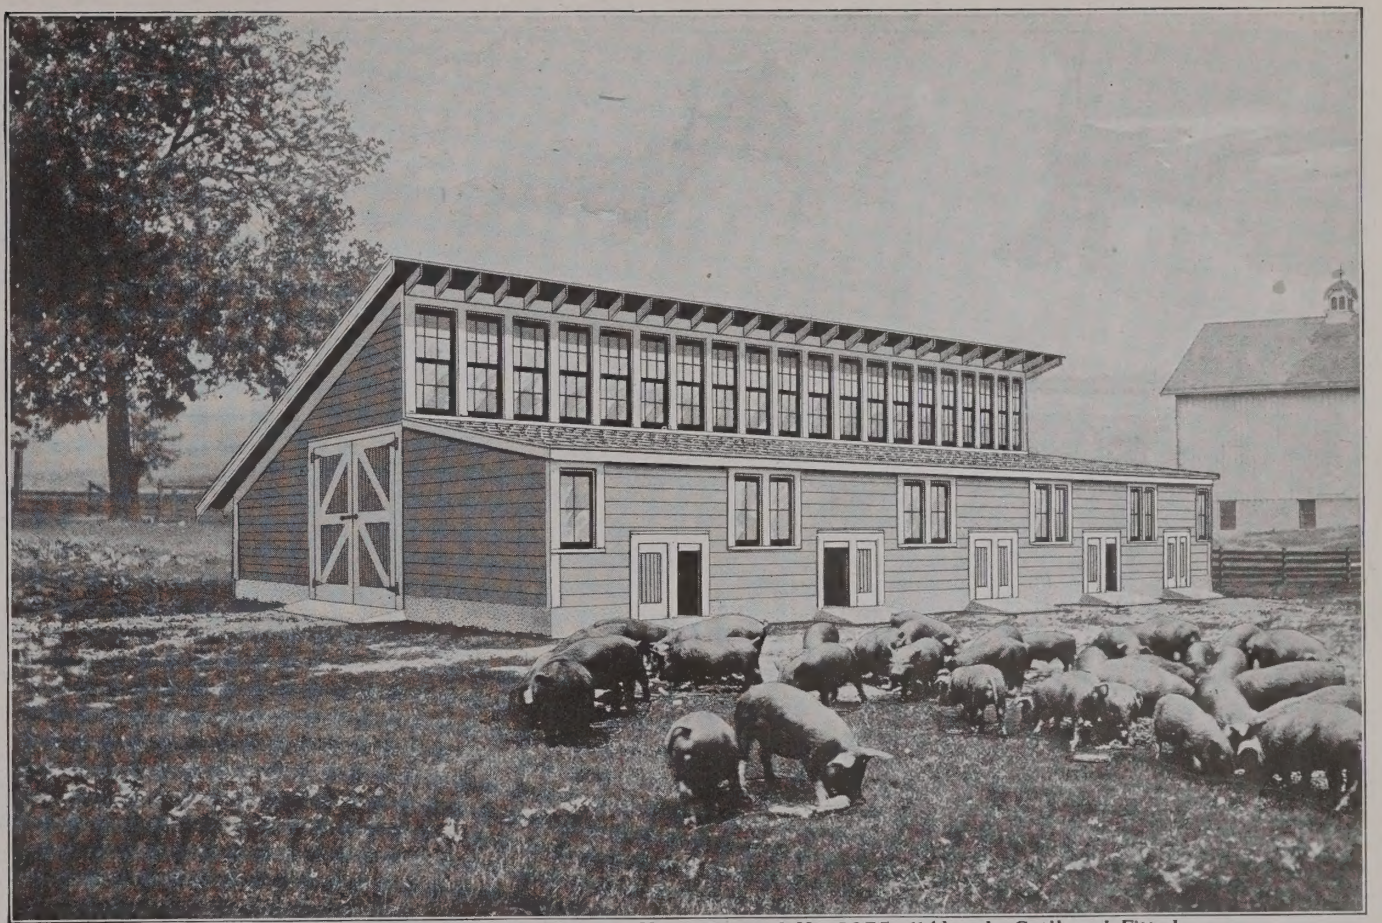

Prices of Modern "Monitor" Hog Houses, No. 2074 and No. 2075, "Already Cut" and Fitted.

No.	Size of Hog House: Width, Feet	Length, Feet	Total Height From Grade Line, Feet	Prices, "Already Cut" and Fitted. With No. 1 Common Cypress Siding	With Select Cypress Siding
2074	20	24	14	$242.00	$254.00
2074	20	30	14	289.00	302.00
2074	20	36	14	335.00	345.00
2074	20	42	14	374.00	398.00
2074	20	48	14	428.00	445.00
2074	20	54	14	475.00	494.00
2074	20	60	14	522.00	541.00
2074	20	72	14	614.00	621.00
2075	24	24	14	279.00	293.00
2075	24	30	14	329.00	345.00
2075	24	36	14	378.00	466.00
2075	24	42	14	428.00	515.00
2075	24	48	14	478.00	496.00
2075	24	54	14	526.00	546.00
2075	24	60	14	576.00	596.00
2075	24	72	14	675.00	697.00

"Already Cut" and Fitted.

"Already Cut" and Fitted.

Doors are made of Cypress, "The Wood Eternal." They are **"ready made"**—ready to hang in place and are superior to doors produced by hand carpentry. A pair of hinged doors at each end are furnished for size 24 feet wide; a single hinged door at each end for size 20 feet wide. Pen doors are made to slide up and down and may be raised from the inside by a rope. Hog House No. 2074 has 4-foot alley and one swinging door. No. 2075 has 8-foot alley and double swinging doors.

Hardware, such as latches, bolts, screws, nails, etc., is included in the price, also sufficient paint for outside walls for **two coats,** oxide red for the body and white for the trim. You may select other combinations from our paint page (see page 48). Pen partitions are not included in the price. On page 46 you will find desirable pen partitions which are especially recommended.

Our **"already cut"** feature, together with **"ready made"** doors, sash, etc., furnished at the prices quoted, make it possible for you to get this Modern "Monitor" Hog House at a remarkable bargain as well as a saving of time and labor. If pen doors are wanted for rear side, add $1.75 each. Length from sills to eaves at front, 4 feet 10 inches. Length from sills to eaves at rear, 4 feet 4 inches.

QUALITY GUARANTEED

IMPORTANT

Our No. 1 Common Cypress Siding will outwear Hemlock, Spruce, Fir or White Pine. Select Cypress Siding is more durable than any other wood for siding.

Prices of Modern "Community" Hog House No. 3004, "Already Cut" and Fitted.

No.	Height from Sill to Eaves Feet	Inches	Width, Feet	Length, Feet	Number of Pens	Prices, "Already Cut" and Fitted
3004	6	5	22	26	7	$440.00
3004	6	5	22	32	9	523.00
3004	6	5	22	38	11	597.00
3004	6	5	22	44	13	670.00
3004	6	5	22	50	15	749.00



Floor plan showing arrangement of "Community" Hog House 32 feet long.

The above prices include the following interior equipment: (1) All pen partitions. (2) All front panels and hardware, as described on page 46. (3) Overhead flooring. (4) Stairs. (5) Grain bin. (6) Solid feed room partition. (7) Pig fenders. Do not overlook this when considering prices.

ALREADY CUT AND FITTED PRICE $440.00 AND UP

An Inexpensive and Practical Hog House, "Already Cut" and Fitted.

THE "Community" Hog House keeps your hogs warm and comfortable in the Wintertime because the space allowed for each animal is limited and on account of the storage room overhead. It is to be located with the ridge running north and south, which, in connection with tight fitting doors and the absence of windows on the north end of the ground floor, excludes the cold north winds. In Summertime this hog house is remarkably cool.

The building is to be erected on a 10-inch foundation of concrete or masonry. The width is 22 feet; height to the ceiling, 6 feet 6 inches, and the total height, 18 feet. Over the ceiling is sufficient room for the storage of bedding, hay and feed. **"Already cut"** material for stairs, 2 feet wide, leading to the storage room is furnished. In the northwest corner of the building a space 6½ feet wide is reserved for a feeding and boiler room. A bin for the storage of grain is located directly over the feed room. This bin is 4 feet wide, 6 feet long and 4 feet high. All framing lumber is of No. 1 Yellow Pine. The outside walls are covered with No. 1 Common **Cypress drop siding,** "The Wood Eternal."

To make the roof good and strong, we furnish **tight fitting sheathing boards** to be laid on the rafters and covered with **Fire-Chief Shingle Roll Roofing,** guaranteed by us for **seventeen years.** This roofing resembles painted shingles.

Doors. A Dutch door, 56A5060, size, 3 feet 9 inches by 6 feet 6 inches, is furnished for one end; also two smaller doors, 3 feet by 4 feet, for the mow floor at each end, giving access from the outside to the storage room (see illustration). Doors for the pens provide for an opening 22 inches wide and 32 inches high. They slide up and down and by means of a rope may be opened from the feed alley. This saves you the trouble of entering the pen or going outside of the hog house on a rainy day. All doors are **"ready made"**—ready to hang in place and are superior to doors made by hand carpentry.

Windows. We furnish our General Barn Sash, 63A5082, which is 1⅜ inches thick, four lights, 9 inches by 14 inches each; opening size, 1 foot 10½ inches by 2 feet 9½ inches. These windows are placed close together and allow an abundance of sunshine to enter the building (see illustration). The north end has only one window—in the gable.

Hardware, such as latches, bolts, screws, nails, etc., is included in the price, also sufficient **paint for two coats,** oxide red for the body and white for the trim. You may select other combinations from our paint page (see page 48). Cupolas, ventilating systems and concrete or masonry are not included.

Pens are 6 feet wide and 9 feet deep, outside measurements. They extend to both sides of the feed alley, which is 4 feet wide. Material for the necessary pen partitions and pig fenders is furnished.

This "Community" Hog House is recommended for cold climates by the Nebraska Agricultural State College, many other authorities and prominent breeders. It was the only permanent model among the exhibits at the Chicago Stock Show in December, 1917.

QUALITY GUARANTEED

Be sure to notice how complete is the equipment of our Hog Houses as specified above, that all framing lumber is "already cut" and fitted, that doors are all "ready made" and ready to hang, that all roofing is guaranteed for seventeen years, and all bins and pen partitions included in price. Be sure to give the size when ordering the hog house.

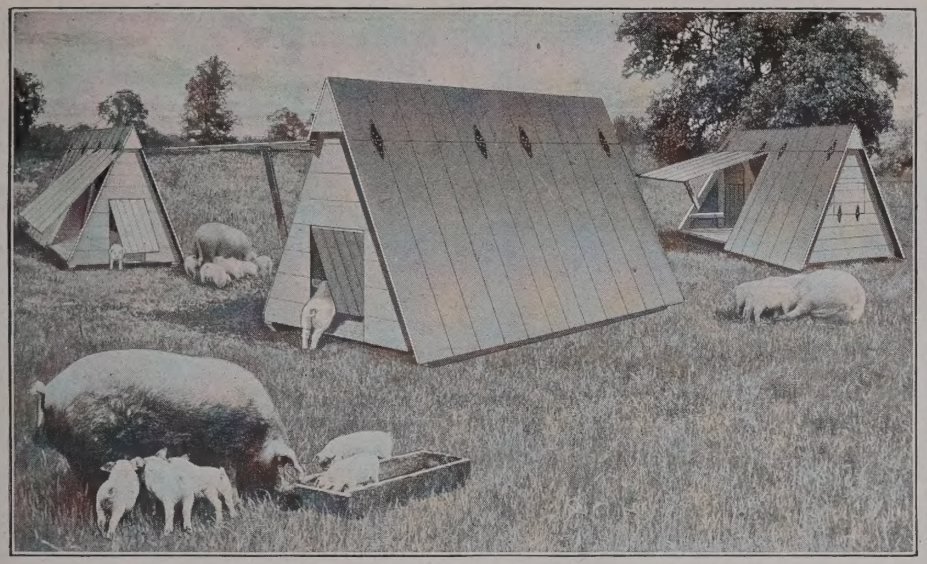

"Wigwam" Movable Hog House No. 56A2076
Size, 8 Feet Long, 6 Feet Wide.
Price, "Already Cut" and Fitted, with Fire-Chief Shingle Roll Roofing and Paint, each.....$31.00
The same, without Fire-Chief Shingle Roll Roofing and without Paint, each.....$26.00
Hardware Included.

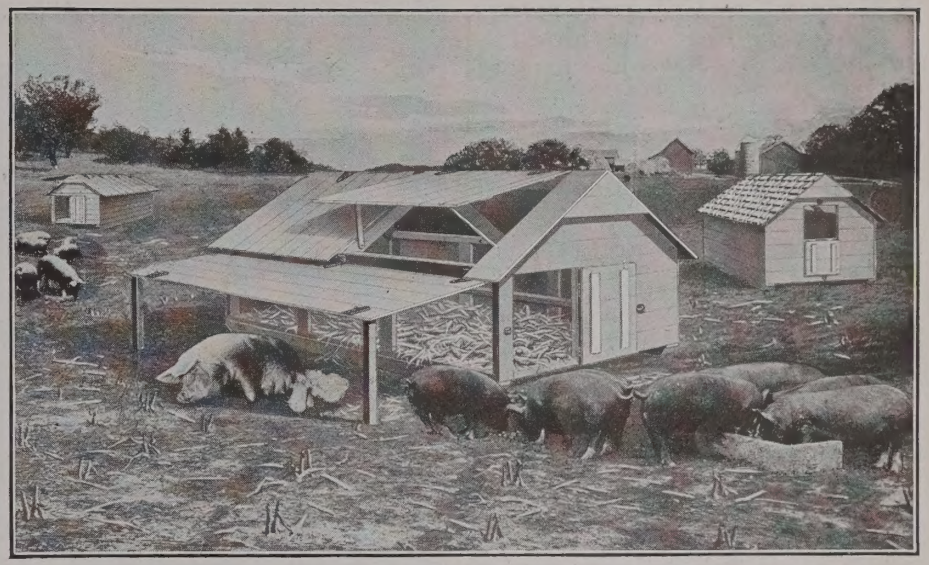

"Colony" Hog House No. 56A2077
Size, 8 Feet Long, 6 Feet Wide.
Price, "Already Cut" and Fitted, with Fire-Chief Shingle Roll Roofing and Paint, each.....$29.00
The same, without Fire-Chief Shingle Roll Roofing and without Paint, each.....$26.00
Hardware Included.

The advantages of a movable hog house are many. They are especially desirable for the isolation of swine with their litter. They also permit of pasturing the herd at distant places from the general farmstead, providing necessary comfort at such places and eliminating much work otherwise connected with the chores.

Two types of movable hog houses are especially recommended, the "Wigwam" Hog House and the "Colony" Hog House.

The "Wigwam" Hog House

THIS type is of triangular shape. It is built up on two solid 4x4 timbers or runners. The runners serve as a sleigh on which the whole hog house is moved from place to place. The total length of the hog house is 8 feet; its width, 6 feet; height, 7 feet. All the material employed for the "Wigwam" is No. 1 yellow pine. Each side of the "Wigwam" has two doors, extending over the whole width of structure. These doors may be opened by means of a wooden prop hinged right to the door. This permits of adjustment of doors to meet weather requirements. The floor is made of 2-inch planks. A fixed pig fender runs across both ends of the "Wigwam." The outside is covered with shiplap siding. On the gables the siding is not brought right to the top. A small space is left open in order to secure ventilation when "Wigwam" is closed.

The "Colony" Hog House

OUR "Colony" Hog House differs from the "Wigwam" in that it provides more overhead room. This is because it is built like a house with a gable roof. The outside dimensions of this type are 6 feet wide by 8 feet long. Its greatest height is a little over 5 feet. It rests like the "Wigwam" on two solid runners, 4x4 inches. All the lumber is No. 1 yellow pine. The floor of the hog house is made of 2-inch planks. The "Colony" is provided with three doors, two forming the roof and one forming the side. All doors are hung on strap hinges. Another small door for ventilation is fixed in one end. For the end walls fixed fenders are furnished. For the side walls, removable fenders. The outside is covered with shiplap siding. On the gable the "Colony" is not sheathed right to the ridge, a small space being left open for ventilation.

A Modern Corn Crib and Granary, "Already Cut" and Fitted

THIS is a combination corn crib and granary. The difference between this building and the corn cribs shown on page 35 of this catalog is that Nos. 2081 and 2082 are long and low, while No. 2084, shown at the right, is high and short. The result is, that on account of the saving in cost of foundation and roof material, the comparative cost per bushel capacity is less. Besides, the specifications of this building provide for a stronger structure, necessitated on account of the grain bins.

This combination corn crib and granary is very highly recommended. The main feature is the strength of the structure, designed to carry with safety **any kind** of grain that may be stored in the bins. Occasionally a builder specifies the capacity of the bins for a certain number of bushels of **"oats"** or other light grain. The bins in this granary are strong enough to carry either oats, wheat or flax seed with safety. Our bins are estimated for a safe carrying load of over 75 pounds per bushel capacity. The safe carrying load required for oats is only 32 pounds per bushel capacity.

Our corn crib and granary is 28 feet wide. The driveway is 12 feet wide and 12 feet high to the lower edge of the joists. This permits of the safe dumping of wagon loads with bat boards. The corn cribs are each 8 feet wide and have a capacity of over 51 bushels per running foot. The grain bins are 12 feet wide and have a capacity of 77 bushels of wheat per running foot.

The floor of each bin is hopper shaped and fitted with two grain spouts with shut-offs.

Modern Corn Crib and Granary No. 2084.

Light for the bins is provided by two hinged sash in the cupola and one stationary sash in each gable.

Hardware, such as latches, bolts, screws, nails, etc., is included in the price, also sufficient **paint for two coats,** for outside of the building, oxide red for the body and white for the trim. You may select other combinations from our paint page (see page 48). Foundation material, equipment, elevators, etc., are not included in the price.

Our "already cut" feature, together with **"ready made"** sliding doors, sash, etc., furnished at the prices quoted, make it possible for you to get this Modern Corn Crib and Granary at a remarkable saving of money, time and labor. Building plans, which are easy to understand, are furnished with every order.

We highly recommend this Modern Corn Crib and Granary.

Prices of No. 2084, "Already Cut" and Fitted.

SIZE			CAPACITY		Price
Width Feet	Length, Feet	Height From Sill to Eaves, Feet	Of Corn Cribs, About Bushels	Of Grain Bins, About Bushels	
28	28	16	3,190	2,156	**$ 796.00**
28	34	16	3,865	2,618	**901.00**
28	40	16	4,550	3,080	**1,009.00**
28	46	16	5,235	3,542	**1,114.00**
28	52	16	5,916	4,004	**1,219.00**

The capacity of cribs and bins has been estimated very conservatively.

ALREADY CUT AND FITTED PRICE $796.00= AND UP

The foundation of this building should be of concrete, 18 inches above the grade line. A shelling and vent trench may be easily built under the floor of the cribs. The total height of the building from the grade to the eaves is 17 feet 6 inches, and to the peak 32 feet. The roof is crowned with a wooden cupola. This permits of the installation of an inside cup elevator. The construction is such, that an outside elevator may be employed with equally good results.

All framing lumber, cribbing and partitions used in this building are No. 1 Yellow Pine; all drop siding Cypress, "The Wood Eternal."

To make the roof good and strong, we furnish **tight fitting, tongued and grooved sheathing boards** to be laid on the rafters and covered with **Fire-Chief Shingle Roll Roofing. Fire-Chief Roofing** is guaranteed by us for **seventeen years.** It resembles painted shingles.

The big driveway doors are "ready made" of Cypress, "The Wood Eternal." They slide on Roll Rite Hangers, the best hangers we handle. One pair of doors is provided for each gable. A smaller door is built in one of the wings of these driveway doors. This permits easy personal access to the interior. (See page 44.) At each end of the crib hinged doors of cribbing are specified. These doors are not ready made, because they can be better fitted on the job.

Specially designed openings are arranged along the inside driveway to be used for filling and emptying the cribs. These openings are adjustable.

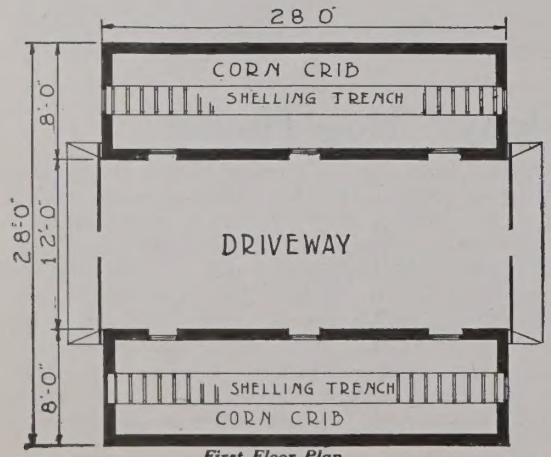

First Floor Plan.

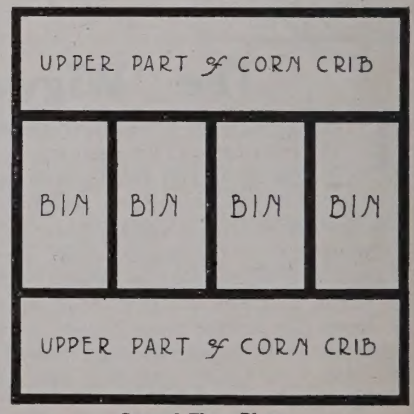

Second Floor Plan.

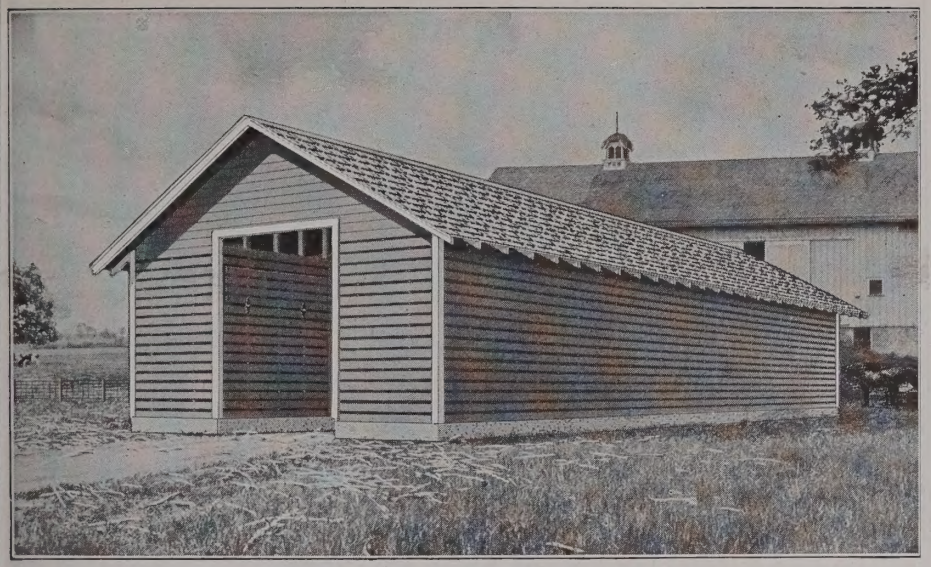

Modern Corn Crib No. 2081

THE corn cribs offered on this page are of correct design and solid construction. We furnish them in two widths. The illustration above shows our No. 2081, which is 26 feet wide. This building provides for a center driveway of 10 feet, and two cribs, one on each side of the driveway, each crib 8 feet wide. The same arrangement applies to Corn Crib No. 2082, but here the width of the cribs is only 6 feet each.

The cribbing is beveled on edges and spaced far enough apart to permit good circulation of air. This construction of the double crib embodies all the good features of a single crib which is wholly surrounded by air. But it is far cheaper than two single cribs, and, in addition, more convenient. On the inside of the cribs, doors of cribbing are provided for filling. These doors are not ready made, as they can be easily made on the job. Openings are also provided for the emptying of the crib.

The illustration shows the solid construction of this crib. The material furnished is first class in every respect.

All framing lumber is of No. 1 Yellow Pine.

Outside walls are covered with Yellow Pine Cribbing.

To make the roof good and strong, we furnish **tight fitting tongued and grooved sheathing boards,** to be laid on the rafters. On the sheathing boards is laid **Fire-Chief Shingle Roll Roofing. Fire-Chief Roofing** is guaranteed by us for **seventeen years.** It resembles painted shingles.

Hardware included in the price, also sufficient **barn paint for two coats,** your choice of color. Foundation material is not included in prices.

Prices of Modern Corn Cribs No. 2081 and No. 2082, "Already Cut" and Fitted.

Catalog No.	Width, Feet	L'gth, Feet	Height from Sill to Eaves, Feet	Capacity, Bushels	Price	Furnished with one side of Crib boarded solid and board lining on inside for small grain, extra
2081	26	30	10	2,066	$331.00	$ 96.00
2081	26	36	10	2,560	384.00	117.00
2081	26	42	10	2,988	433.00	133.00
2081	26	48	10	3,412	483.00	149.00
2081	26	54	10	3,840	533.00	165.00
2082	22	24	10	1,280	238.00	77.00
2082	22	30	10	1,602	284.00	92.00
2082	22	36	10	1,920	331.00	107.00
2082	22	42	10	2,238	446.00	121.00
2082	22	48	10	2,560	436.00	136.00

"Already Cut" and Fitted

Sliding doors at each end of driveway, $94.50 extra.

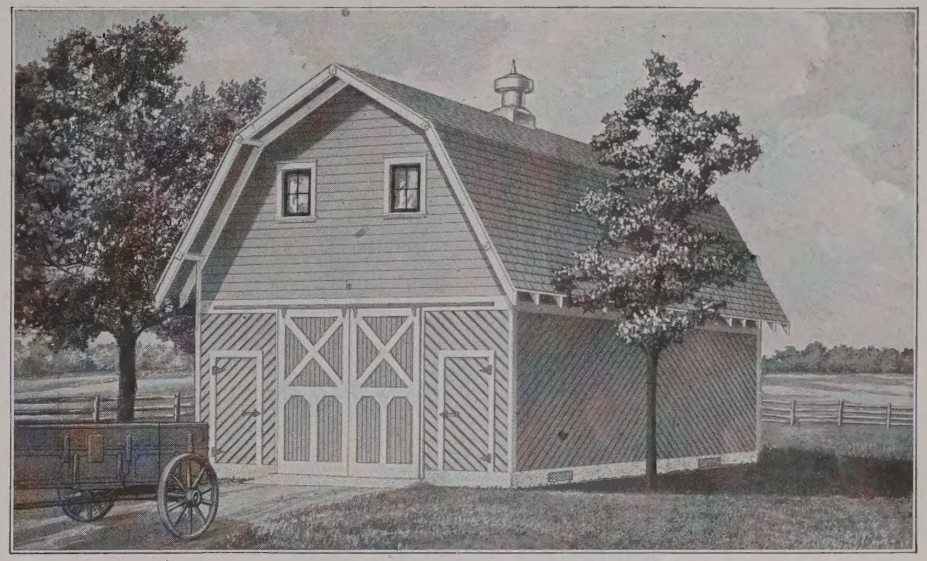

Modern Corn Crib No. 5201

OUR Corn Crib No. 5201 is a nicely balanced building and will fit in harmoniously with any group of farm buildings. In addition to the driveway doors, two single doors are provided for convenient entrance where it is not necessary to take in the wagon. On the upper floor there is plenty of room for small grain. This space can be partitioned off as occasion requires.

The cribbing is beveled on edges and spaced far enough apart to permit good circulation of air.

The illustration shows the solid construction of this crib. The material furnished is first class in every respect.

All framing lumber is of No. 1 Yellow Pine.

Outside walls are covered with Yellow Pine Cribbing.

To make the roof good and strong, we furnish **tight fitting tongued and grooved sheathing boards,** to be laid on the rafters. On the sheathing boards is laid **Fire-Chief Shingle Roll Roofing. Fire-Chief Roofing** is guaranteed by us for **seventeen years.** It resembles painted shingles.

Hardware included in the price, also sufficient **barn paint for two coats,** your choice of color. Foundation material is not included in prices.

Prices of Modern Corn Crib No. 5201, "Already Cut" and Fitted.

SIZES			PRICES	
Width	Height	Height From Sill to Eaves	No. of Bushels of Corn It Will Hold	Price
22 feet	28 feet	12 feet	2,250	$543.00
22 feet	34 feet	12 feet	2,750	610.00
22 feet	40 feet	12 feet	3,250	677.00
26 feet	28 feet	12 feet	3,050	590.00
26 feet	34 feet	12 feet	3,700	667.00
26 feet	40 feet	12 feet	4,350	744.00

"Already Cut" and Fitted.

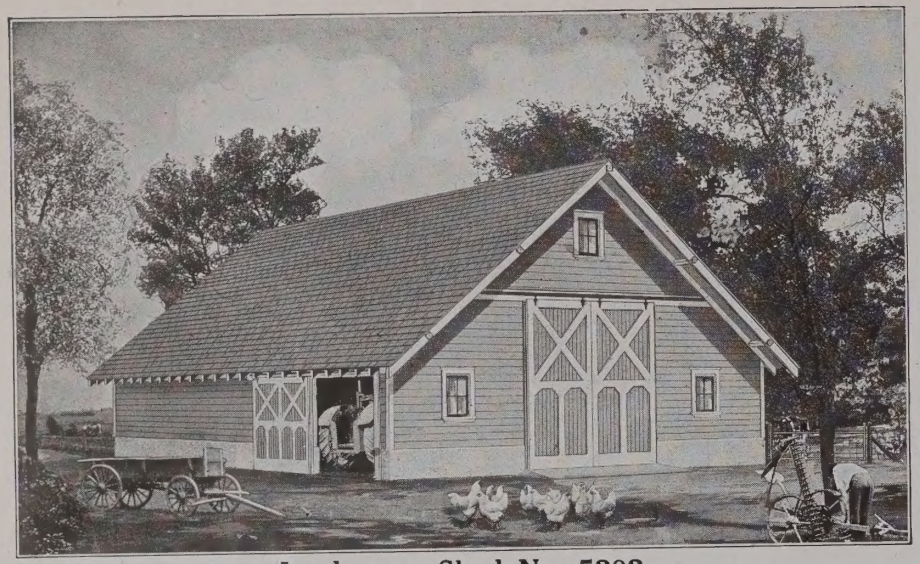

Implement Shed No. 5202

IN THIS Implement Shed we aim to provide a building that will conveniently house the farm tractor as well as the rest of the usual farm machinery and implements. The roller doors on the left side are 7 feet high and 8 feet wide. The space for the tractor inside has an earthen floor, the balance to be covered with concrete. This arrangement saves both tractor and floor. The main doors are on the front elevation and are 12 feet high by 12 feet wide. The front is also provided with three windows to amply light the entire interior.

All the framing lumber is of No. 1 Yellow Pine.

The outside walls are covered with drop siding of Cypress, "The Wood Eternal." This combination secures a very strong frame and outside walls that will withstand the weather for a lifetime.

To make the roof good and strong we furnish **tight fitting tongued and grooved sheathing boards** to be laid on the rafters. On the sheathing boards is laid **Fire-Chief Shingle Roll Roofing. Fire-Chief Roofing** is guaranteed by us for **seventeen years.** It resembles painted shingles.

Doors are made of Clear Cypress, "The Wood Eternal." They are built in two sections, and slide on Standard Barn Door Hangers and roller tracks. All doors are **"ready made"**—ready to hang in place, and are superior to doors produced by hand carpentry.

Windows are conveniently located.

Hardware, such as latches, bolts, screws, nails, etc., is included in the price, also sufficient **paint for two coats,** oxide red for the body and white for the trim. You may select other combinations from our paint page. (See page 48.) Cupolas, foundation material, etc., are not included in the price.

Prices of Implement Shed No. 5202, "Already Cut" and Fitted.

Width, Feet	Length, Feet	Height From Grade to Eaves, Feet	Price, No. 1 Common Cypress Siding		Price, Select Cypress Siding	
36	36	8	$466.00	"Already Cut" and Fitted.	$488.00	"Already Cut" and Fitted.
36	40	8	496.00		518.00	
36	44	8	525.00		549.00	
36	48	8	554.00		579.00	
36	52	8	584.00		610.00	
36	56	8	613.00		641.00	
36	60	8	642.00		672.00	

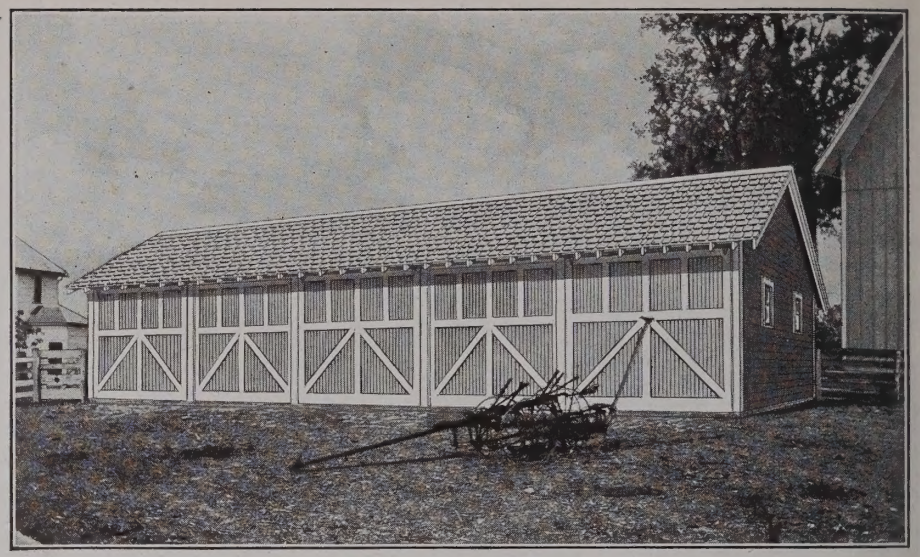

Implement Shed No. 2088

FARMERS everywhere recognize the advisability of having a separate building for machinery and tools. Much money is wasted by not taking proper care of the machines which are required on the average farm throughout the year. The rain rusts them quickly and otherwise impairs their usefulness. When housed in a building of this kind they are always fully protected. The building above will also make a handy workshop for necessary repairs on all kinds of machinery, vehicles, harness and other odd jobs.

All the framing lumber is of No. 1 Yellow Pine.

The outside walls are covered with drop siding of Cypress, "The Wood Eternal." This combination secures a very strong frame and outside walls that will withstand the weather for a lifetime.

To make the roof good and strong we furnish **tight fitting tongued and grooved sheathing boards** to be laid on the rafters. On the sheathing boards is laid **Fire-Chief Shingle Roll Roofing. Fire-Chief Roofing** is guaranteed by us for **seventeen years.** It resembles painted shingles.

Doors are made of Clear Cypress, "The Wood Eternal." They are 10 feet high and 12 feet wide, built in two sections, and slide on Standard Barn Door Hangers and roller tracks. All doors are **"ready made"**—ready to hang in place, and are superior to doors produced by hand carpentry.

Windows are conveniently located.

Hardware, such as latches, bolts, screws, nails, etc., is included in the price, also sufficient **paint for two coats,** oxide red for the body and white for the trim. You may select other combinations from our paint page. (See page 48.) Cupolas, foundation material, etc., are not included in the price.

Prices of Implement Shed No. 2088, "Already Cut" and Fitted.

SIZES			PRICES			
Width, Feet	Length, Feet	Height to Peak, Feet	With No. 1 Common Cypress Siding		With Select Cypress Siding	
24	24	17	$339.00	"Already Cut" and Fitted.	$351.00	"Already Cut" and Fitted.
24	36	17	439.00		459.00	
24	48	17	540.00		564.00	
24	60	17	642.00		669.00	
24	72	17	745.00		774.00	
24	84	17	850.00		878.00	

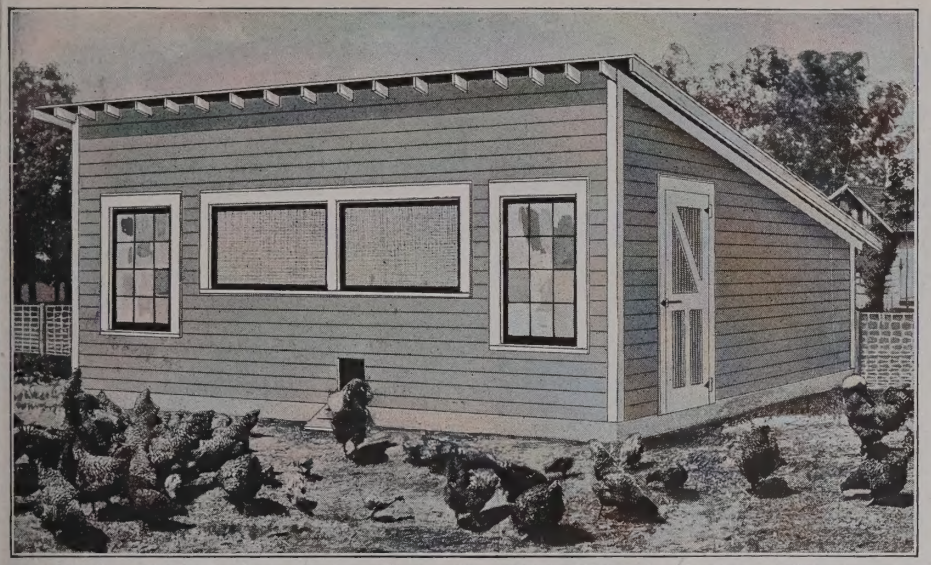

Modern Multiple-Unit Poultry House No. 2078, "Already Cut" and Fitted

ALREADY CUT AND FITTED PRICE $182.00 Price Does Not Include Concrete.

20x20 feet. Price, each....$182.00

Additional Section, 20x20 feet. Price, each.....$170.00

THIS Modern Multiple-Unit Poultry House is the result of the most careful study, made by the New Jersey Agricultural Experiment Station. It is designed to solve the question of the poultry man who is striving for a good Winter egg yield, and it has been approved by the poultry departments of a large number of agricultural colleges. The Multiple-Unit Poultry House comes as near to the ideal as is possible under average conditions.

A house 20 feet wide and 20 feet long, of the shed roof type, is one of the most economical units that can be used.

Such a unit has a floor space of 400 square feet, allowing 4 square feet to each bird. It is adapted to all climates and is one of the most efficient producing units. The diagrams below show the possible development of the Multiple-Unit idea, by the addition of more units, as may be desired, to increase the size of the plant.

This Modern Multiple-Unit Poultry House is to be built on an 8-inch concrete foundation. It is 9 feet high in front, 5 feet high in the rear. An entrance is provided at one end. Two sash, opening size 2 feet 8½ inches by 4 feet 7½ inches, are furnished for each unit, also two muslin screens, 3 feet by 4 feet 6 inches. The sash is provided with hinges to swing sideways. The screens have hinges to be swung upward if desired. The roosts **ARE INCLUDED** in price. They are hinged to the side wall studs and can be swung up, to allow the cleaning of the drop board. Material to build 21 nest boxes is furnished. Each box to be 12 inches wide, 16 inches long and 18 inches deep. Material for one coop for brooding hens also furnished. All framing lumber is No. 1 yellow pine.

For the outside walls drop siding is furnished. For the roof we furnish tight fitting tongued and grooved sheathing boards, on which is to be laid **Fire-Chief Shingle Roll Roofing,** guaranteed by us for **seventeen years.**

This Multiple-Unit Poultry House should be built facing the South on a layer of cinders and with concrete foundation walls, to keep rats and vermin out. If you follow these instructions you will have a well ventilated Laying House, free from all forms of moisture, well provided with direct sunlight, built to keep the birds warm, and large enough to permit plenty of exercise. All framing for this house is ready cut, all you have to do is to nail them together according to our plans, which are easy to understand and furnished with every order.

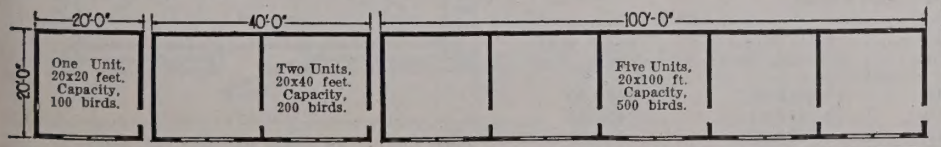

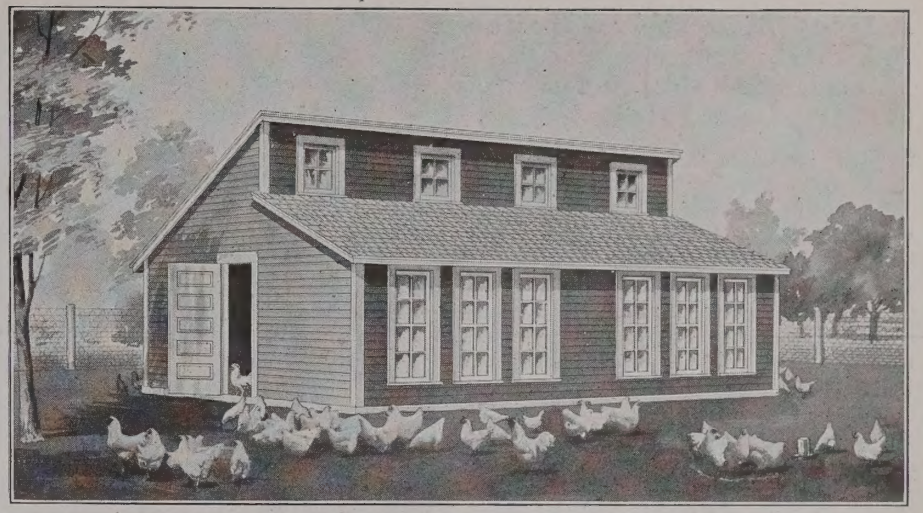

Modern Chicken House No. 2051, "Already Cut" and Fitted

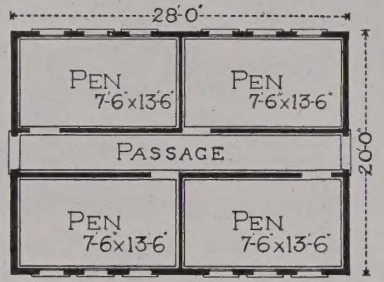

FLOOR PLAN

ALREADY CUT AND FITTED PRICE $248.00 Concrete Not Included.

For $248.00 we will furnish all the material to build this Chicken House, consisting of Lumber, Siding, Windows, Doors, Hardware, Paint and Wire Netting.

On looking at the floor plans it will be seen that entrance can be made from either end of the chicken house directly into the feed alley and from the alley into any one of the pens. These are four in number, each one measuring 13 feet 6 inches by 7 feet 6 inches. Wire netting, 6 feet high around each pen. The dimensions of the building are 28 feet in length by 20 feet in width, 6½ feet from sill to eaves and 17 feet from grade to ridge.

Poultry raising has been demonstrated to be quite a profitable business and the most noted experts in this line agree that a well lighted, well ventilated chicken house is a necessity where the biggest profits are desired. Especially is this true of people who make a specialty of select prize stock. In this Chicken House we provide twelve big windows, six on each side. In addition to these windows we further provide four four-light windows which swing outward at the top of the building, all of same being on the front. No chance for draft if windows are left open, yet this arrangement gives an abundance of light and fresh air. For the roof we now specify our Fire-Chief Shingle Roll Roofing, GUARANTEED FOR SEVENTEEN YEARS.

Build this Modern Chicken House on a concrete foundation 6 to 10 inches above the ground, 16 to 24 inches deep, 4 to 6 inches wide. Fill inside of foundation with dry cinders and put 2-inch mixture of concrete on top of this. This will give you a dry and sanitary chicken house, easy to clean, relatively cheap and permanent.

A Good Modern Ice House, Strongly Built and Well Insulated. "Already Cut" and Fitted

THIS ice house is carefully and solidly constructed. It is not what you put into an ice house that counts, but what you take out of it. Ice in many ice houses will shrink to about 50 per cent of the original filling. If the ice is well packed, shrinkage will be reduced to a minimum; we estimate that it should be less than 20 per cent, which we believe is about the least shrinkage on record.

The walls of this ice house are substantially insulated (see cross sections of the ground floor at the bottom of this page). The construction and insulation are guaranteed to give satisfactory results.

All siding and partitions used for this ice house are of Cypress, "The Wood Eternal," a wood that will not rot. We could have reduced the cost considerably by substituting other lumber which is far less expensive, but that would not have given us the permanent building which we are offering you. The ice house can be furnished with a built-in cold storage room, as is shown in the illustration in the lower left hand corner.

ALREADY CUT AND FITTED PRICE $419.00 AND UP

The U. S. Department of Agriculture says:*

"An ample supply of ice is of greater economic importance in the country home than in the city residence. City people can purchase perishable supplies as needed, but the remoteness of country homes from markets often renders it necessary to use canned corned or smoked meat products during the season of the year when the table should be supplied with fresh meats. Not only is ice appreciated because of its use in the preservation of fresh meats, butter and other table supplies, but the production of high grade domestic dairy products is almost impossible without it. Many markets to which milk is now shipped demand that it be cooled before shipment to a degree not attainable without the use of ice.

"The principles involved in the proper care of milk and cream are very simple and easily understood. Notwithstanding this fact, much of the product delivered to creameries is improperly cared for and therefore is unfit to be made into butter. One of the most common causes of poor quality of butter is the lack of immediate, thorough cooling of the cream after separation. The Dairy Division has made a careful investigation of conditions existing on a large number of dairy farms where first class cream is produced, and the data obtained show that, if properly cooled, cream of the best grade can be produced with but little extra labor or expense.

"These dairymen realize the importance of the use of ice and provide themselves with a suitable supply."

*Farmers' Bulletins Nos. 475 and 623.

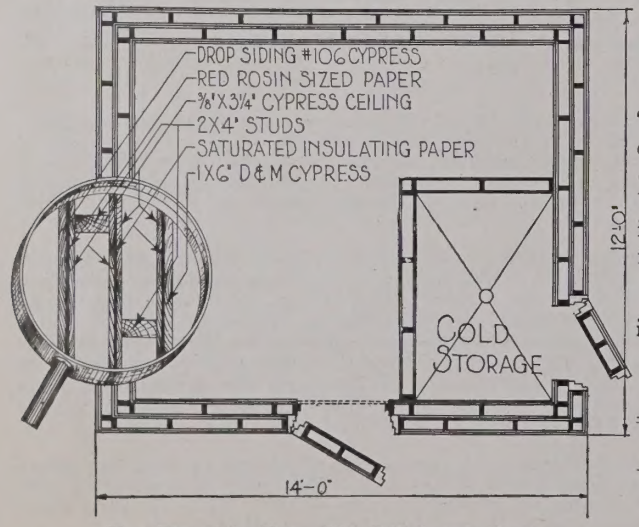

Floor Plan of Ice House With Cold Storage Room.

The "Alaska" Modern Ice House No. 5212, "Already Cut" and Fitted.

All the framing lumber for this ice house comes to you "already cut" and fitted, which not only reduces the building expense but, due to accurate fitting, makes tight joints, very essential in preventing the melting of the ice. Price includes building plans and **seventeen-year guaranteed Fire-Chief Roofing.** An investment in an ice house of this kind will soon pay for itself.

Don't build an ice house with single studding and improperly insulated.

Prices of The "Alaska" Modern Ice House No. 5212, "Already Cut" and Fitted.

Width Feet	Length, Feet	Capacity, Tons	Price Without Cooling Room	Price With Cooling Room
12	14	42	**$419.00**	**$435.00**
12	16	50	**477.00**	**493.00**
14	20	75	**536.00**	**549.00**

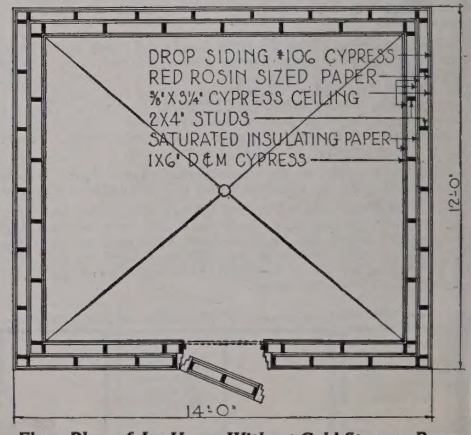

Floor Plan of Ice House Without Cold Storage Room.

Jennison Wright Co.

KREOLITE LUG BLOCKS



Illustration shows actual reproduction of block. Note lugs which make it easy to lay floor rapidly, allow proper space for filling and insure a smooth laying floor of unusual durability.

Manufactured from Select Long Leaf Yellow Pine, thoroughly air seasoned six to eight months. Blocks are then subjected to heat and vacuum treatment and thoroughly impregnated under hydraulic pressure with Kreolite oil, having very high antiseptic qualities. This treatment insures perfect preservation of the wood and renders it impervious to the action of water or acids. Sanitary, easily cleaned, easy under foot, warm and restful, give a good foothold wet or dry, extreme durability and easy to lay.

First, the lug enables you to rapidly set blocks in place without having to allow for the pitch filler. Simply lay the smooth edge of the block against the lug and this takes care of the spacing. Second, the lug takes care of all expansion in the floor itself, thus eliminating the bulging or raising up of the blocks in places when expanding. Third, it eliminates slipping, as it affords a good foothold for horses, cattle, etc. Fourth, as all pressure due to expansion naturally comes in the lug, this prevents squeezing out of the oil from the block itself, which would otherwise happen if blocks were laid side by side and no lug were there to take up the expansion.

Blocks are laid so that all of the wear comes directly on the end of the grain the same as on a mallet; hence the extreme long life of a wood block floor.

For cow barns, piggeries, sheep pens, etc., we recommend 2-inch Kreolite Lug Blocks. For horse stables we recommend 3-inch Kreolite Lug Blocks. Full descriptions for laying lug blocks furnished on receipt of order.

Prices quoted below include necessary pitch filler. When you order the blocks you get the filler with them.

How to Order—Determine the number of square feet in the stalls or floors to be covered. Divide this square surface by nine, which will give the number of square yards required to lay the floor.

To Central and Western territory shipments made direct from GRANITE CITY, ILLINOIS. To Eastern territory shipments direct from TOLEDO, OHIO.

For Cow Barns, Horse Stables and Hog Pens.

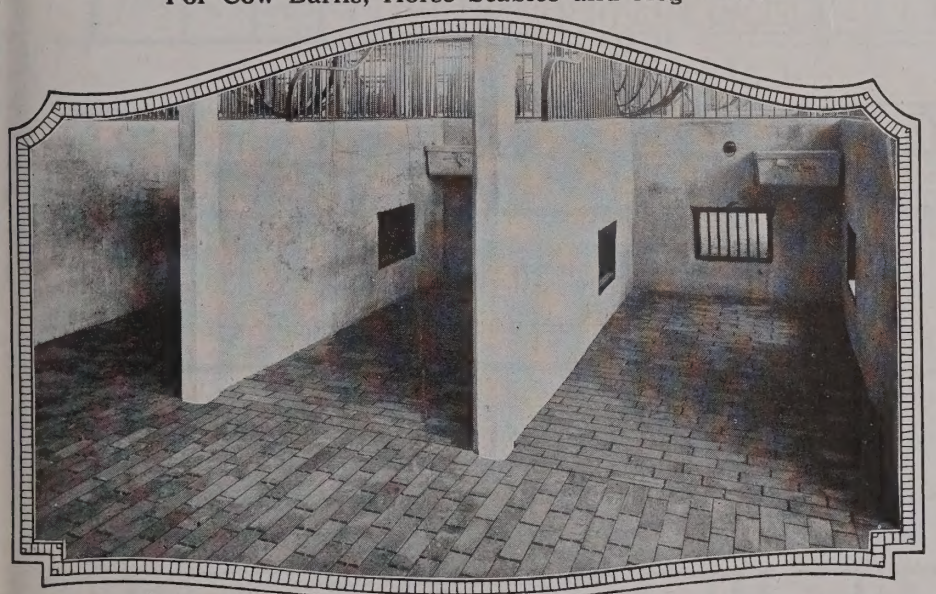

This picture, which is a reproduction of an actual photograph, shows Jennison Wright Kreolite Lug Blocks in use in a large barn.

Catalog No.	Thickness	Width	Length	Wt., per Square Yard	Price, per Square Yd., Including Pitch Filler, From Toledo	Price, per Square Yd., Including Pitch Filler, From Granite City
56DB3660	2 in.	3 in.	5 to 8 in.	80 lbs.	$3.50	$3.35
56DB3661	3 in.	4 in.	5 to 8 in.	120 lbs.	4.65	4.40

Send all orders to Sears, Roebuck and Co., allowing price from whichever point is nearest to you.

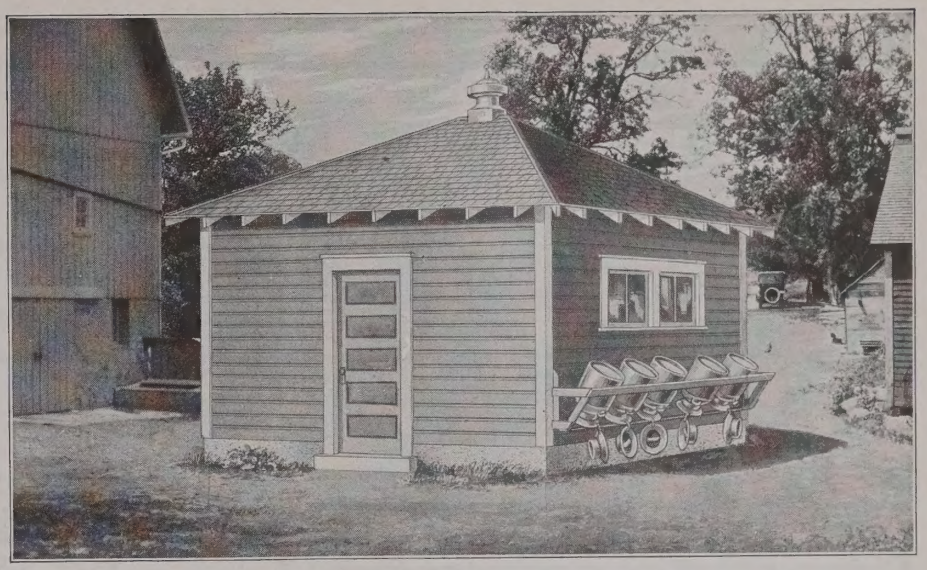

Milk House No. 5293, "Already Cut" and Fitted.

ALREADY CUT AND FITTED PRICE $125.00

For $125.00 we will furnish all the material to build this Milk House, consisting of Lumber, Siding, Flooring, Shingles, Hardware, Door, Sash and Paint.

THE Milk House above illustrated is a solidly constructed building, 14 feet wide by 12 feet long and is 16 feet high from foundation to peak. It has two water troughs in which the milk cans can be set to cool until they are ready to be taken to the creamery or until the milk is disposed of otherwise. On the left hand side a shelf runs from the door to the side wall and extends along the side wall to the water trough in the rear.

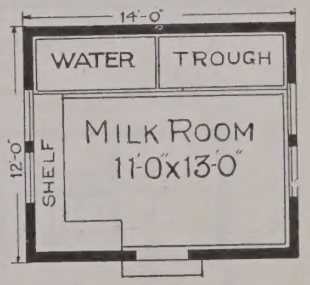

To the farmer who wants to keep his milk in a sanitary condition, this building at the price which we charge for all the materials is a first class proposition. We guarantee a good grade of material all the way through and agree to furnish a sufficient quantity to build it according to our plans. No. 1 yellow pine framing lumber. Cement, dairy equipment, etc., not included in the price.

This Man Saved $300.00.

I am very much pleased with my Ready Cut Barn. It sure is satisfactory in every way. I saved about $300.00 by getting the barn from Sears, Roebuck and Co. I will be glad to show anyone the barn at any time, or answer any letters I get in regard to material. You may use my name and also send anyone here.

Yours truly,
S. J. YOUNG, R. F. D. 2, Parma, Mich.

NOTE—If you write to Mr. Young for information be sure to enclose a stamped envelope for reply.

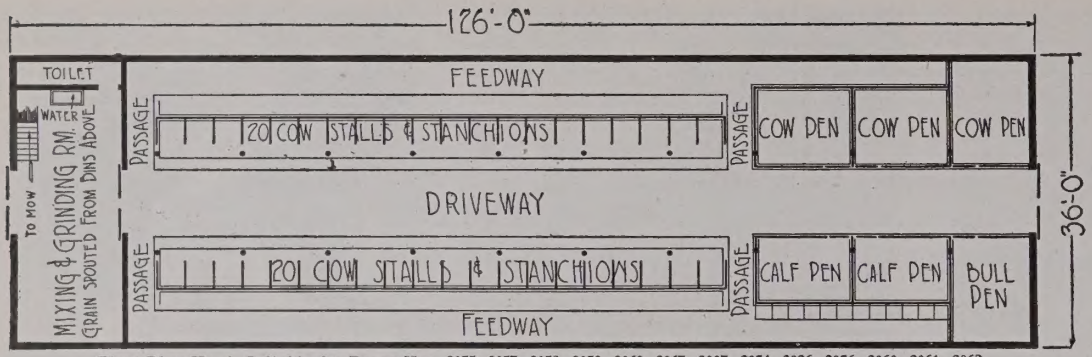

Floor Plan No. 1, Suitable for Barns Nos. 2055, 2057, 2058, 2059, 2063, 2067, 3007, 2054, 3026, 2056, 2060, 2061, 2062.

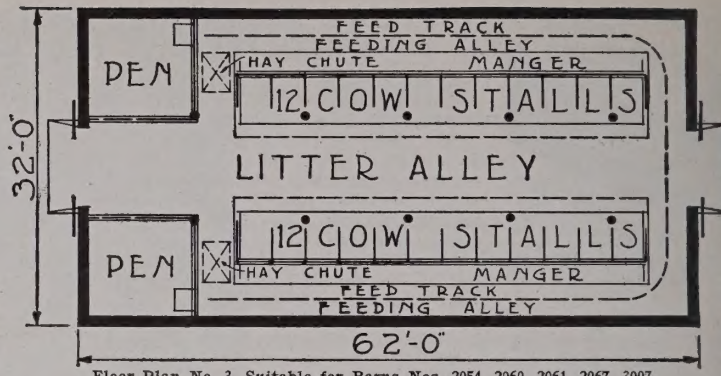

Floor Plan No. 3, Suitable for Barns Nos. 2054, 2060, 2061, 2067, 3007, 2055, 2056, 3026, 2057, 2058, 2059, 2062, 2063.

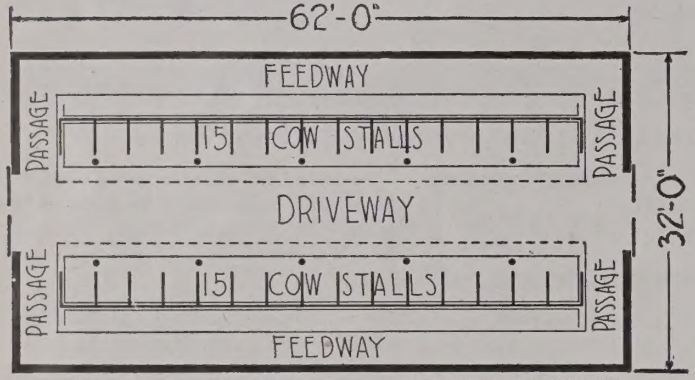

Floor Plan No. 4, Suitable for Barns Nos. 2054, 2060, 2061, 2067, 3007, 2055, 3026, 2056, 2057, 2058, 2059, 2062, 2063.

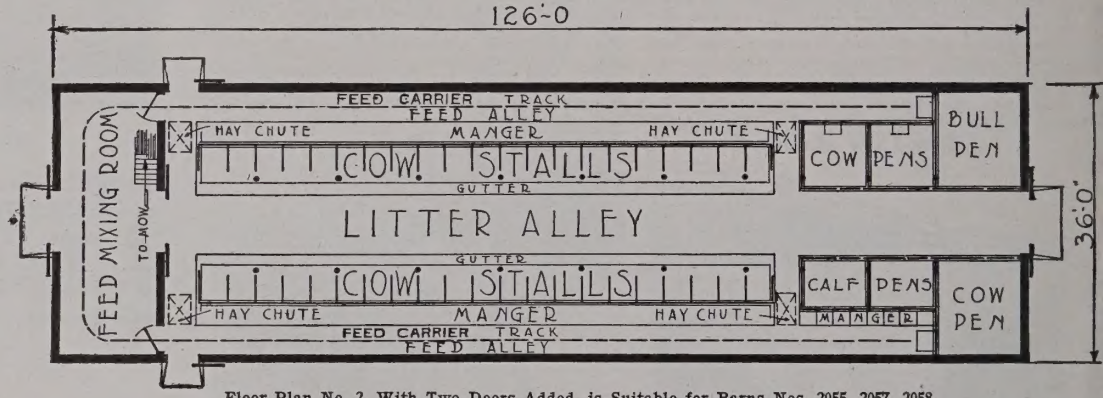

Floor Plan No. 2, With Two Doors Added, is Suitable for Barns Nos. 2055, 2057, 2058, 2059, 2063, 2067, 3007, 2054, 2056, 3026, 2060, 2061, 2062.

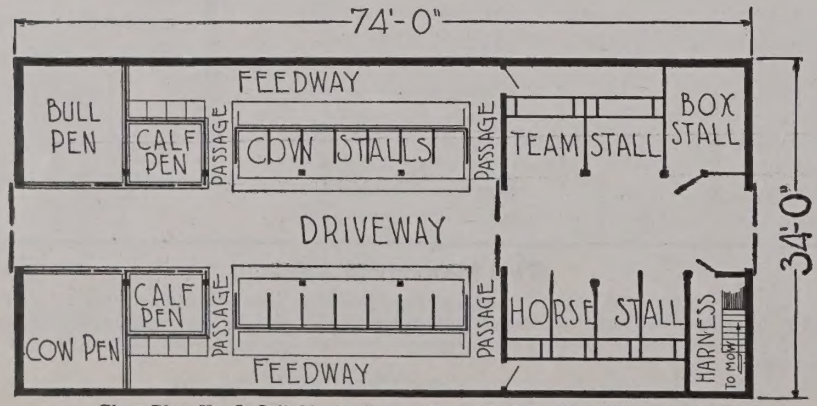

Floor Plan No. 5, Suitable for Barns Nos. 2054, 2060, 2061, 2067, 3007, 2055, 3026, 2056, 2057, 2058, 2059, 2062, 2063.

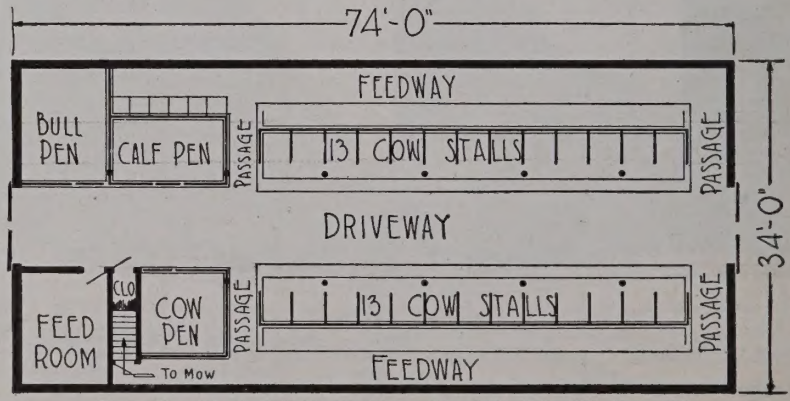

Floor Plan No. 6, Suitable for Barns Nos. 2054, 2060, 2061, 2067, 3007, 2055, 3026, 2056, 2057, 2058, 2059, 2062, 2063.

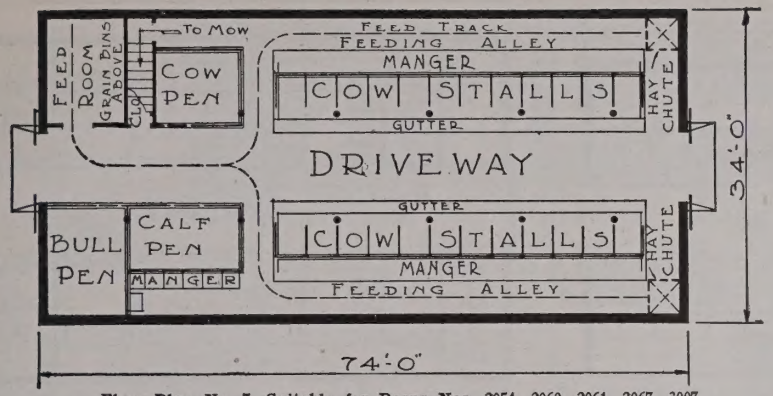

Floor Plan No. 7, Suitable for Barns Nos. 2054, 2060, 2061, 2067, 3007, 2055, 3026, 2059, 2056, 2057, 2058, 2062, 2063.

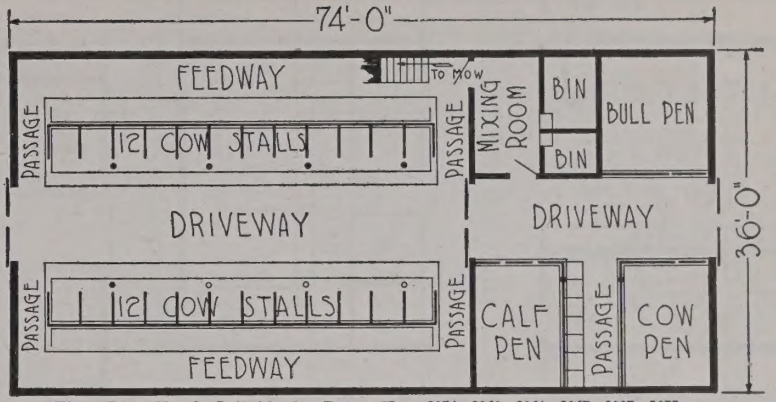

Floor Plan No. 8, Suitable for Barns Nos. 2054, 2060, 2061, 2067, 3007, 2055, 3026, 2056, 2057, 2058, 2059, 2062, 2063.

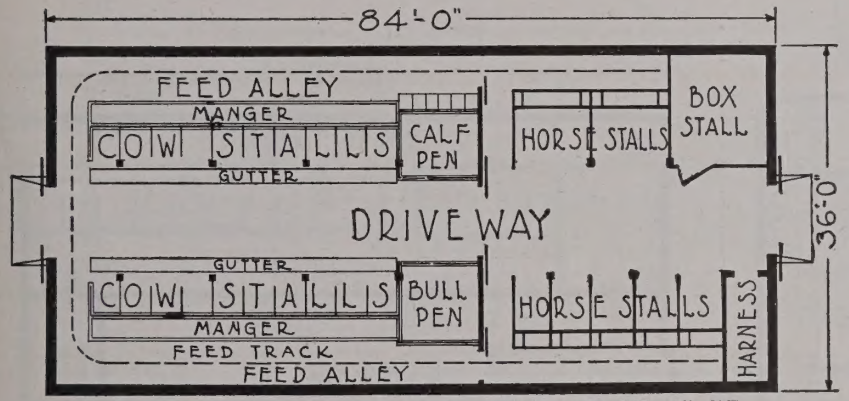

Floor Plan No. 9, Suitable for Barns Nos. 2055, 2057, 2058, 2059, 2063, 2067, 3007, 2054, 3026, 2056, 2060, 2061, 2062, 2063.

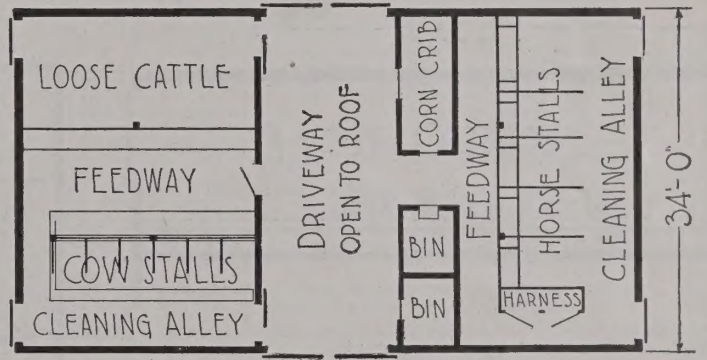

Floor Plan No. 10, Suitable for Barns Nos. 2064, 2068, 3006.

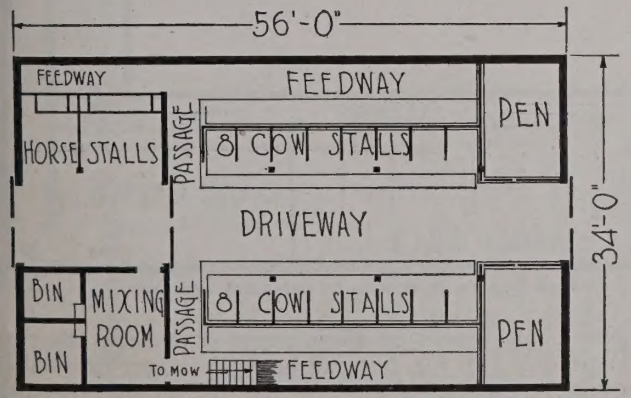

Floor Plan No. 11, Suitable for Barns Nos. 2054, 2055, 2057, 2058, 2059, 2060, 2061, 2063, 2067, 3007, 3026, 2056, 2062.

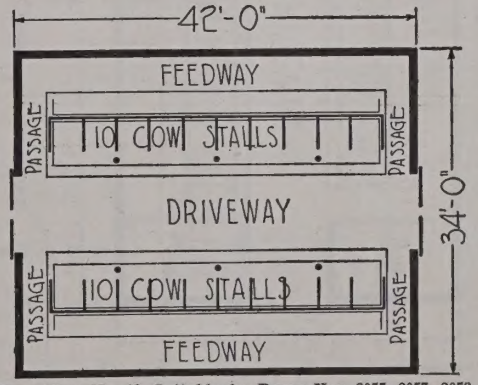

Floor Plan No. 12, Suitable for Barns Nos. 2055, 2057, 2058, 2059, 2063, 2067, 3007, 2054, 3026, 2056, 2060, 2062.

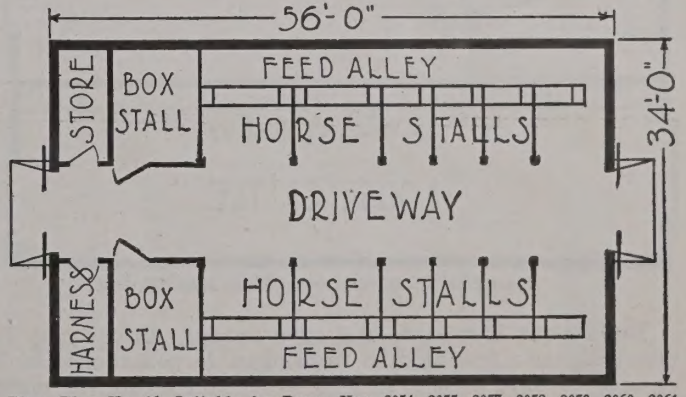

Floor Plan No. 16, Suitable for Barns Nos. 2054, 2055, 2057, 2058, 2059, 2060, 2061, 2063, 2067, 3007, 3026, 2056, 2062.

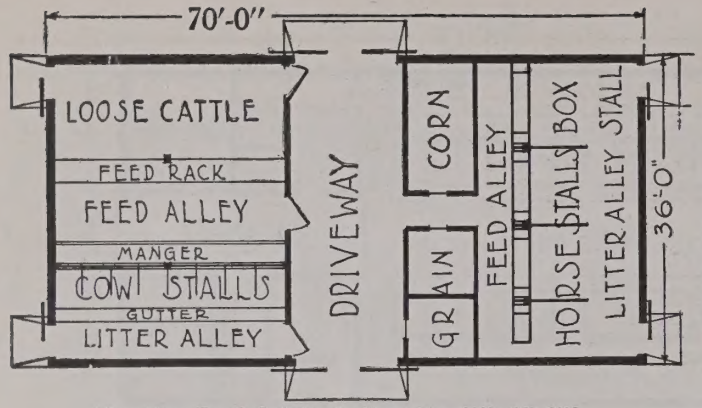

Floor Plan No. 14, Suitable for Barns Nos. 2064, 2068, 3006.

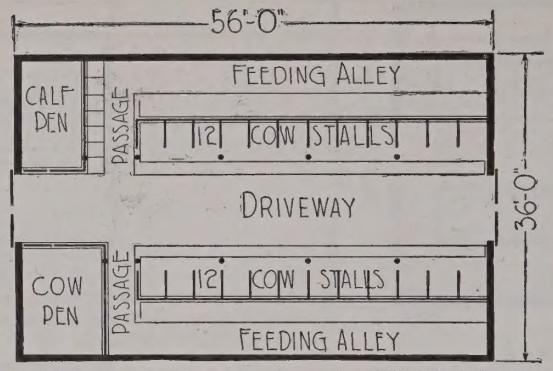

Floor Plan No. 15, Suitable for Barns Nos. 2054, 2055, 2057, 2058, 2059, 2060, 2061, 2063, 2067, 3007, 3026, 2056, 2062.

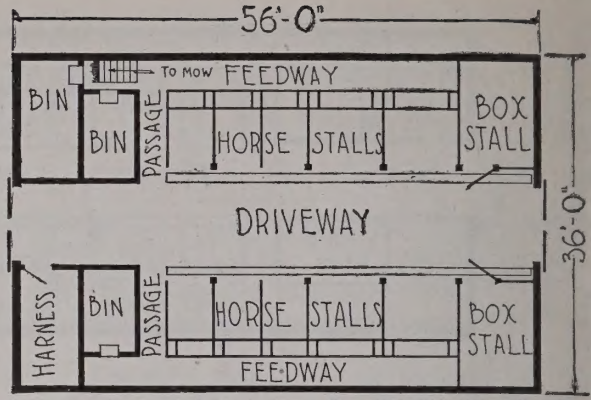

Floor Plan No. 13, Suitable for Barns Nos. 2054, 2055, 2057, 2058, 2059, 2060, 2061, 2063, 2067, 3007, 3026, 2056, 2062.

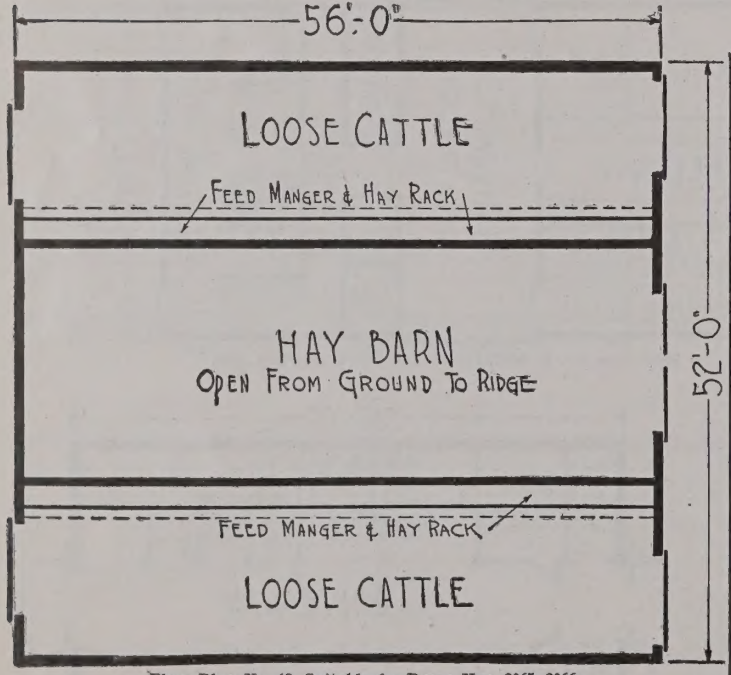

Floor Plan No. 18, Suitable for Barns Nos. 2065, 2066.

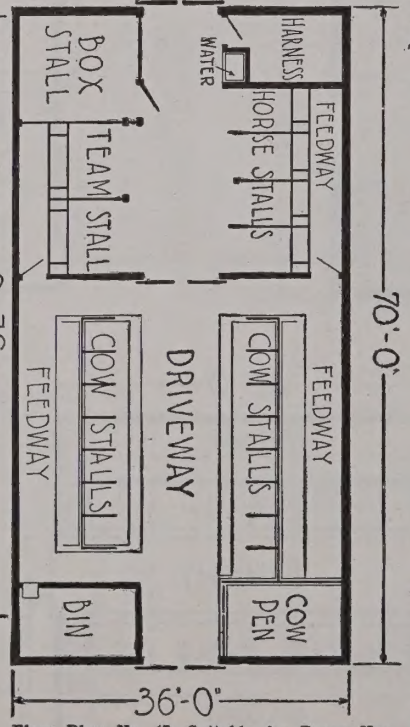

Floor Plan No. 17, Suitable for Barns Nos. 2055, 2057, 2058, 2059, 2062, 2063, 2067, 3007, 2054, 3026, 2056, 2060, 2061.

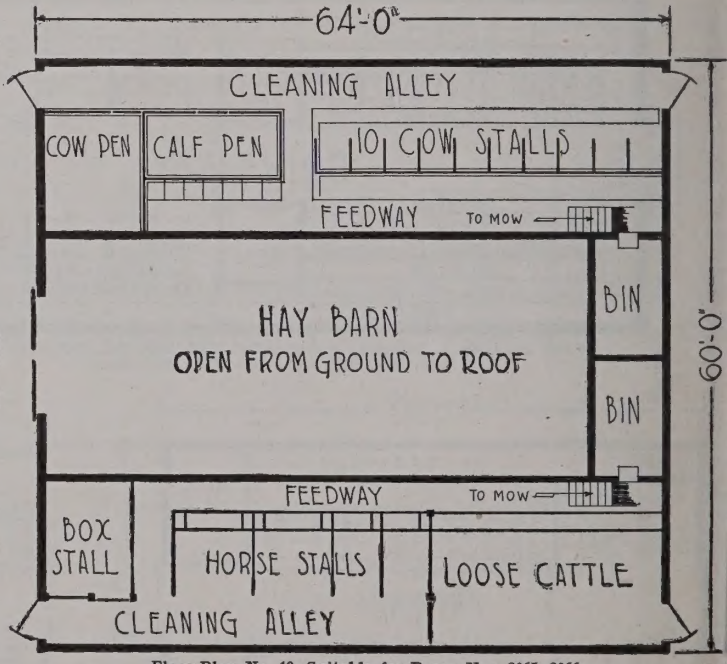

Floor Plan No. 19, Suitable for Barns Nos. 2065, 2066.

Build your barn now and save money. Prices may be much higher a few months from now. If you cannot build at once, be sure to send in your order and secure the material at present prices.

The floor plans shown on these pages fit exactly the particular barns they call for, but can be made larger or smaller by changing the number of stalls to suit the amount of stock you have.

We will be glad to quote on complete lightning rod equipment for any building shown in this catalog.

Lightning Rods

Be sure to include lightning rods in your requirements. Please mention number and size of building when writing us.

The value of lightning rods is recognized by the U. S. Government. They are used on Government buildings and are recommended by the Department of Agriculture in its bulletins; insurance companies report practically no losses on properly rodded buildings and many companies offer reduced premiums for such risks.

32A3702
Complete Top With 30-Inch Horse Vane.
Price, **$3.35**

32A3704
Complete Top With Ornamental Cow Vane.
Price, **$3.35**

32A3705
Complete Top With Ornamental Pig Vane.
Price, **$3.35**

32A3706
Complete Top With Ornamental Sheep Vane.
Price, **$3.35**

Lightning Rods Prevent Strokes.

It is not the chief purpose of lightning rods to attract the lightning, and they do not attract it, but as an electrical discharge will naturally follow the path of least resistance, if a lightning flash cannot be avoided a copper cable lightning rod offers the easiest path for its passage and the discharge is taken care of without injury to the building or its occupants. The lightning rod also collects the charge of electricity which accumulates from the earth and upon the building and the sharp points constantly discharge it into the air.



Standard Cable (30 Wires).

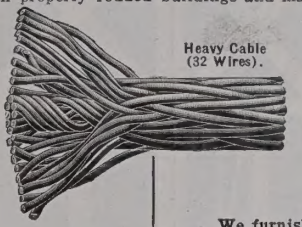

Heavy Cable (32 Wires).



Extra Heavy Cable (34 Wires).

As a building must become charged with earth electricity before it can be struck by lightning, so it follows that the lightning rod, by preventing the accumulation of heavy charges, affords constant protection.

An Expert Not Needed.

Anyone can put up his own lightning rod outfit with but little trouble. All the tools needed are a hammer and a screwdriver. You can buy a standard outfit from us, put it up yourself and save an unnecessary expenditure. If, however, you should feel any doubt as to the proper fixtures to buy or the correct manner in which your building should be rodded, write us, enclosing a rough sketch of your building, and we will be very glad to advise you.

How to Measure Your Buildings for Rods.

The best way is to run a rope or cord over the building in the same lines the rod is to be run, and where the rod will make a turn or branch drive a nail to hold the cord in place. In measuring for cable allow enough so that all bends or turns over eaves or around corners will be gradual, and where cable passes close to metal cornices, water spouts, ornaments, gutters, etc., it should be connected to such points. At least two ground connections are needed for every building, and on large buildings with more than five tops or points, three groundings. Allow 10 feet for each ground connection. That is, the cable must extend into the ground 10 feet so as to be connected with moist earth permanently. Tops or points should not be over 25 feet apart. Each cupola and tower should have a point or top and each gable or wing extending from main structure 10 feet or more should also have a point or top. There should also be a top or point at the side of each chimney. Metal ventilators should always be connected to the cable.

Where gables or wings make branch circuits necessary, we include without extra charge copper splicers for making these connections. All cables should be ordered in one piece and cut on the ground to fit their position on the building. If the roof is of irregular construction and broken up by small gables or hips, it is sufficient to place a point or top on each of the most prominent or elevated parts of the structure.

Lightning Rod Tops.

Plain, Ornamental and Chimney Tops.

Each top is furnished complete, as shown in illustrations, with necessary connections. Glass balls extra for plain tops. Animal vanes are full swell bodied, made of non-rusting zinc and weatherproof gilded.

A complete plain top consists of a heavy pure copper tube upright, a seamless pure copper point, a brace stand for supporting the tube upright and a copper coupling for connecting the upright to the cable rod. A glass ball may be included at an extra price if desired for ornamental purposes.

Where a building requires two or more tops the outfit is usually made up to include one ornamental top and the remaining tops plain, but one style of top affords as much protection as the other.

A complete ornamental top includes the same items as the plain top, and in addition an ornamental vane of selected pattern and a glass ball.

Animal and arrow vanes are mounted on brass swivel to turn easily with the wind. Vanes with animal figures are 30 inches long. Arrow vanes are 23 inches long. Glass balls can be furnished in following colors: Opal, blue, silver or gold. **Be sure to give color of glass ball wanted and state animal figure desired when ordering ornamental tops.**

It is always advisable to place a point or top alongside of projecting chimneys. Chimneys seem to possess an attraction for lightning and are frequently struck. Sometimes our regular tops are not long enough to extend above the chimney, hence we furnish a special top for chimney protection, which consists of a long copper tube with coupling at the bottom for connecting to the cable and a point on the tube, also an eyebolt for attaching the tube to the chimney as shown by the illustration. No brace or ball is supplied with these special chimney tops. See table for prices of various heights.

How to Make the Ground Hole.

The simplest and best method is to have your blacksmith sharpen the end of a 5/8-inch diameter iron or steel rod, 14 or 15 feet long, enlarging the sharpened end slightly about 1 inch above the point. This is to keep the rod from bending in the ground.

This form of rod is the best thing ever devised for making ground holes and will work where ground augers will give serious trouble. Before inserting the cable in the ground hole a string should be tied tightly around the end of the cable to prevent the wires from spreading and catching on the side of the hole.

In doing the work the rod is driven a little at a time and then twisted around. After a little start is made, water is poured into the hole, then by churning the rod up and down, it is possible to make a hole 10 feet or more deep in a very few minutes.

Complete Plain Top.

Barn with cupola. A point or top should be placed on top of the cupola. Hay track should be connected to lightning rod cable if the track projects outside the barn.

Copper Cable Lightning Rods.

The manner of weaving our cables is such that each wire presents practically its entire surface as an electrical conductor. It is a scientific fact that a static electrical current is carried on the surface of all conductors, therefore our cable has more electrical carrying capacity than any cable in which the wires lay very close together.

We furnish three sizes, our Standard cable measuring about 3/8 inch in diameter, with 30 wires; our Heavy cable measuring about 7/16 inch in diameter, with 32 wires, and our Extra Heavy measuring about 1/2 inch in diameter, with 34 wires. In some sections where electrical storms are unusually severe the heavier cables have been extensively adopted, especially for large buildings or those requiring three or more groundings. For all ordinary buildings, however, our Standard cable is sufficient.

Our two heaviest cables, the 7/16-inch and the 1/2-inch sizes, are so woven as to permit the greatest possible circulation of air around and between the wires. They are woven around a center strand of twisted copper wire, as shown in the illustration of the heavy cable. This reduces the danger of overheating and thus melting the cable. The special weave used in our two heaviest cables results in a rod truly scientific and presents a very fine appearance on the building.

Attaching Rods to Buildings.

The lightning rod cable must be attached directly to the building, or in electrical contact with it. The cable must not be insulated from the building by glass insulators. If the cable is not in continuous contact with the building it does not prevent the building from becoming charged, and that is the purpose of a lightning rod.

Copper Clip.

The most common method of attaching the cable to building is by using a copper clip and nailing flat to the roof and sides of the building, and unless otherwise ordered we furnish a sufficient supply of these copper clips and nails for fastening the cable to the building. Our price on the lightning rod cable includes these clips and nails.

Cable Connectors.

Cable Splice Connector.

These are made of copper and are used where branch circuit or lines of cable are necessary to protect gables or extensions of the buildings, also where it is necessary to connect two straight lines. Where a branch cable is to be run the connector is placed in position on the main line and hammered down right around the cable. Then the branch line is slipped into the end of the connector between the two jaws, which are simply pressed firmly together, or pounded just enough to make a firm contact.

We include, without extra charge, as many of these connectors as may be needed with each outfit.

In ordering state which style is desired, whether for branch line or to connect two straight lines.

A complete lightning rod outfit with cable and complete tops will weigh, packed for shipment, from 3/4 to 1 pound to the foot. **Shipped from factory in MICHIGAN.**

32A3700—Standard Copper Cable.
Price, per foot..... **$0.09**

32A3696—Heavy Copper Cable.
Price, per foot..... **.10**

32A3695—Extra Heavy Copper Cable.
Price, per foot..... **.14**

32A3698—Complete Plain Top.
Price, each..... **1.25**

32A3716—4 1/2-Inch Glass Ball. (State color wanted, whether opal, blue, silver or gold.) Weight, 8 ounces.
Price, each..... **.40**

32A3718—Complete Chimney Top. 6 feet high, price, **$1.50;** 8 feet high, price, **$1.90;** 10 feet high, price, **$2.30.**

32A3723
Complete Top With Ornamental Automobile Vane.
Price, **$3.35**

32A3712
Complete Top With 23-Inch Fantail Arrow Vane.
Price, **$2.20**

32A3709
Complete Top With Compass Ornament.
Price, **$3.05**



Chimney Top.

HONOR BILT BARN DOORS ALREADY MADE

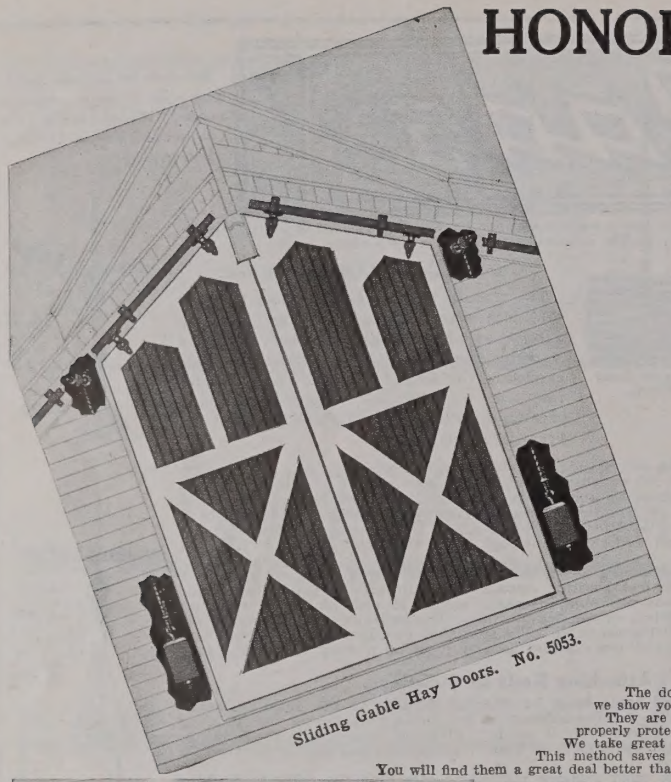

Sliding Gable Hay Doors. No. 5053.

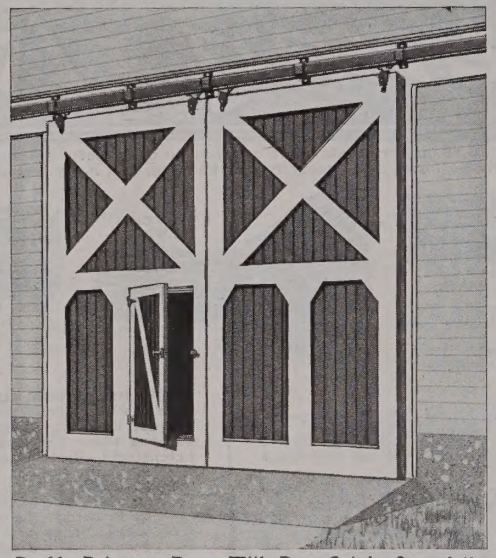

Double Driveway Doors With Door Cut in One of the Door Panels. No. 5059.

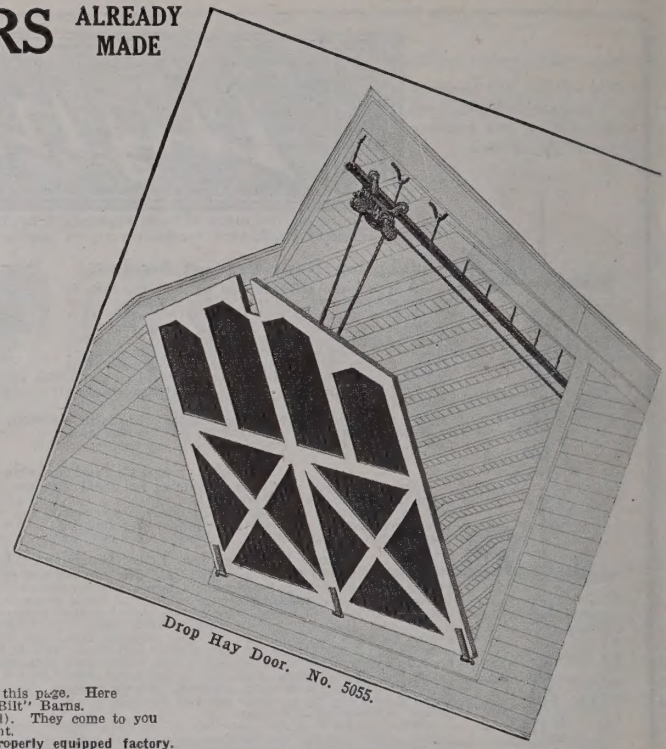

Drop Hay Door. No. 5055.

ALREADY MADE BARN DOORS.

The doors for the barns shown in this book are selected from the assortment on this page. Here we show you barn doors (already made) of a suitable design to match our "Honor Bilt" Barns. They are made of high grade weather resisting material—Cypress (the wood eternal). They come to you properly protected, for we ship them painted with one coat of high grade linseed oil paint. We take great care in making them—they are built **by experienced mechanics in a properly equipped factory.** This method saves you time and labor; all you have to do is to put on the hinges and hang the doors in place. You will find them a great deal better than are generally used. We furnish them in proper sizes with all necessary hardware included.

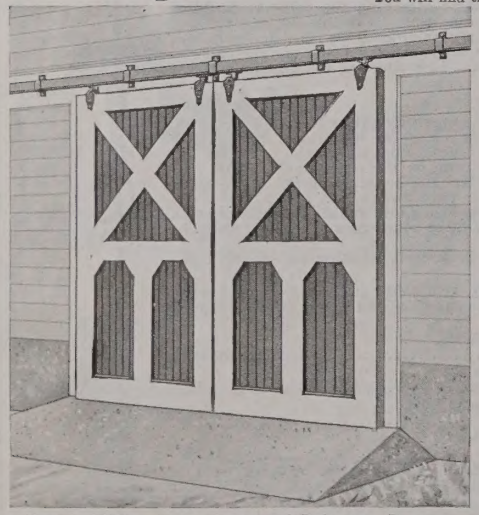

Double Sliding Barn Doors and Driveway Doors. No. 5071.

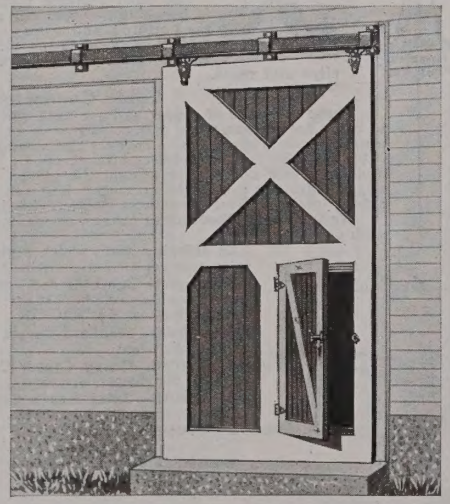

Single Sliding Barn Door With Door in Panel. No. 5062.

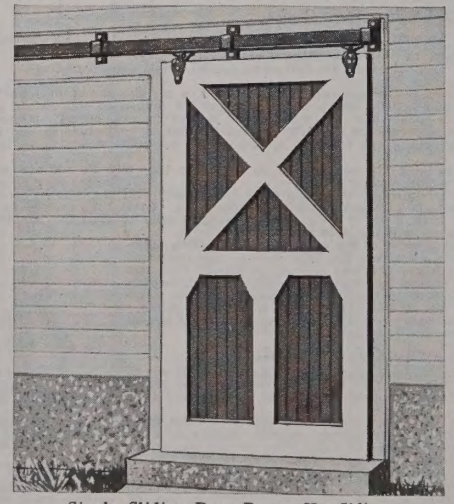

Single Sliding Barn Door. No. 5061.

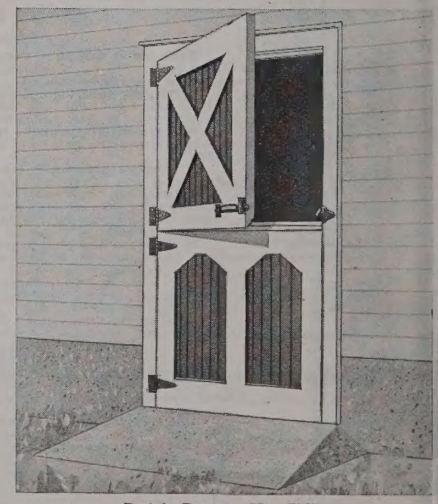

Dutch Doors. No. 5060.

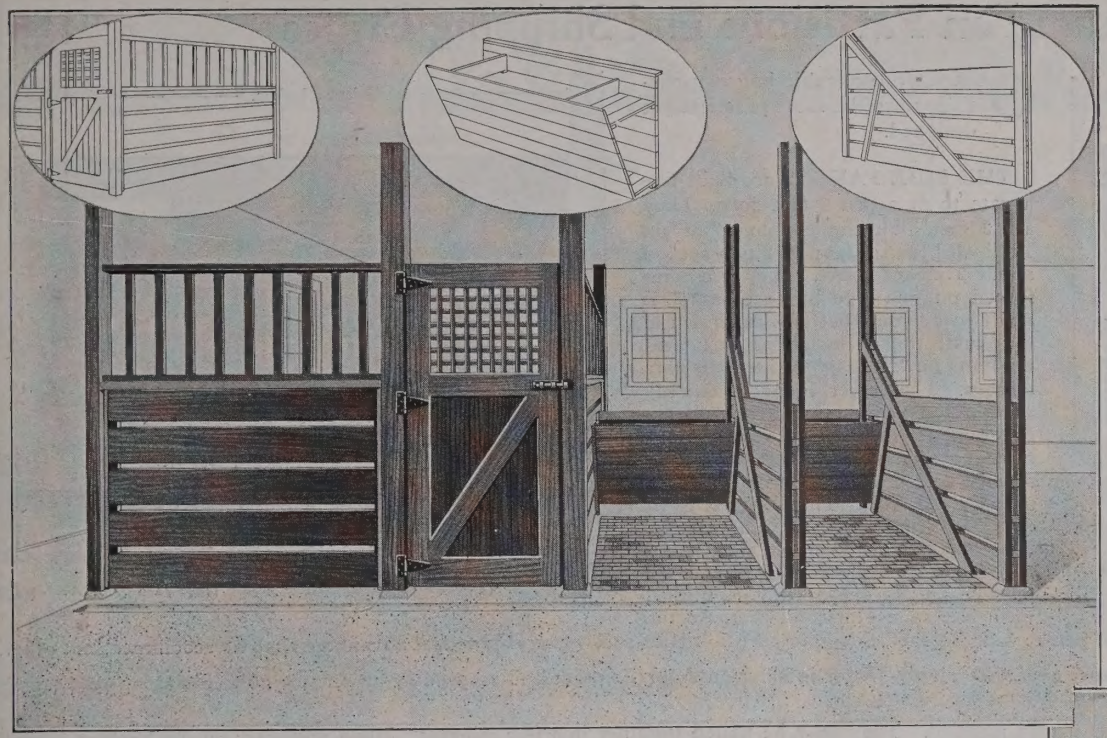

Box Stalls, Stall Partitions and Cattle Feed Racks

THE ECONOMY and the good appearance of our box stalls, stall partitions and cattle feed racks will appeal to you. They are strongly built, serviceable and reasonably priced.

BOX STALLS are 7 feet 4 inches high. They are made of 2-inch planks planned to be spaced 2 inches apart to secure good air circulation and mounted by a grille of 2x2-inch material capped by a 2x4-inch rail. The door is **"already made;" that is, "already cut"** and **nailed,** making a door superior to one produced by hand carpentry. It is 7 feet 4 inches high and 3 feet 8 inches wide and hung on three heavy T hinges. A solid bolt for fastening the door is provided. Note the lattice panel. It is neat and sanitary. Posts are 6x6-inch, solid, and 9 feet high. Because requirements of size vary, we have quoted posts, partitions and door separately, the price of the door including the hardware. **In ordering please specify the number of posts wanted, the length of partitions, the number of each length and the number of doors.** We shall then send the box stalls **"already cut,"** all you have to do is to **nail** them together.

STALL PARTITIONS. They are made of heavy 2-inch planks, spaced 2 inches apart. The planks are made to fit between the posts. These posts are built-up of two uprights, 2x6 inches, 9 feet high, blocked apart. In addition, two braces are provided on each side to make partitions solid and strong. Hay manger and feed box have removable bottoms to facilitate cleaning. Hay manger does not extend down to floor line. Enough room is left for a cat to get under. This prevents rats, mice and other vermin from nesting. As in the case of box stalls, we have priced posts, partitions and mangers separately to enable you to order just what you need. We have also quoted a complete partition, consisting of two built-up posts, the partition, a 5-foot manger with feed box, and a 9-foot manger with two feed boxes for team stalls.

Our CATTLE FEED RACKS will be found very serviceable. They may be used for our feeder barns. They permit of being fitted in nearly every barn where cattle are fed. The illustration shows how they are fitted against the barn wall. The light shaded parts are not included in the price. Order per lineal foot.

Prices for Material "Already Cut" and Fitted

BOX STALLS AND PARTS.

56A5072—Doors, 7 feet 4 inches high, 3 feet 8 inches wide, "already made." Price, each.....$7.00

56A5116—Partitions for box stalls. Price, per lineal foot..... .56

56A5117—Posts for box stalls, 6x6 inches, solid, 9 feet high. Price, each..... 1.21

56A5118—Complete Box Stall, including one door, **"already made,"** 16 feet of partition and two solid posts, sizes as shown at left, including all hardware. Price.....$18.67

HORSE STALL PARTITIONS AND PARTS.

56A5119—Partition between horse stalls, 9 feet long, with built-up posts, 9 feet high. Price, each.....$6.01

56A5120—Mangers between horse stall partitions. Price, per lineal foot..... .76

56A5121—One complete partition and one manger 5 feet long, including one grain feed box and nails. Price, complete.....$9.69

56A5122—One complete partition and one manger 9 feet long, including two grain feed boxes and nails. Price, complete.....$12.63

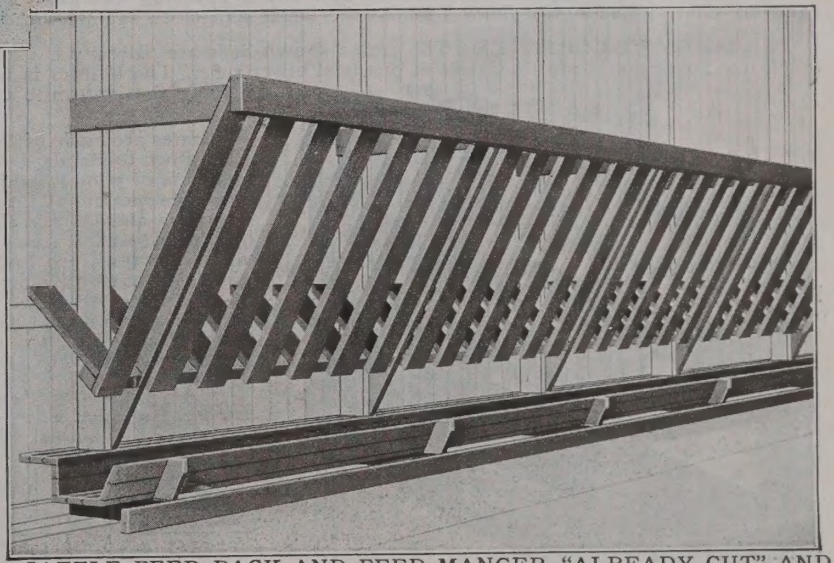

CATTLE FEED RACK AND FEED MANGER "ALREADY CUT" AND FITTED.

56A5109—Feed Rack only. Price, per lineal foot.....46c
56A5110—Manger only. Price, per lineal foot.....40c
56A5111—Complete Feed Rack and Manger. Price, per lineal foot.....86c

"Already Cut" Hog House Pen Partitions and Shipping Crates

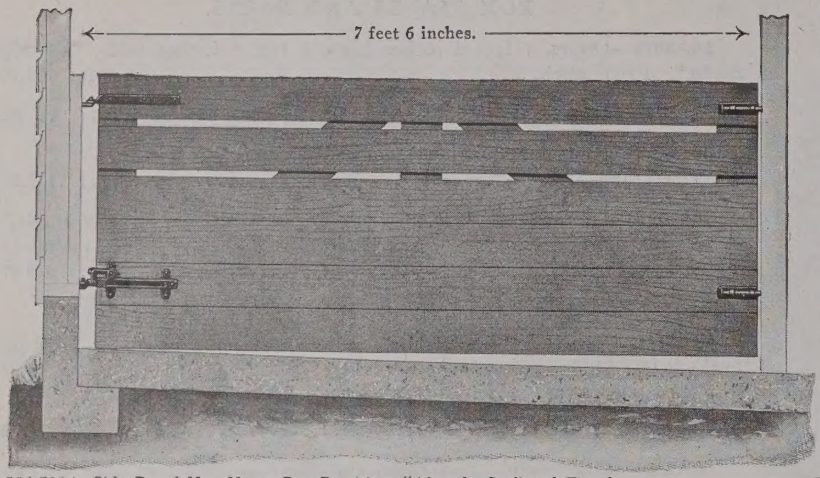

56A5114—Side Panel Hog House Pen Partition, "Already Cut" and Fitted.
Price, per Panel, Including Hardware.....$4.07
Price, per Panel, Without Hardware..... 2.14

OUR interchangeable hog pen partitions are the most practical yet designed.

THE SIDE PANELS are built like a gate to fit a pen 8 feet deep. They are 3 feet high and composed of six 1x6-inch boards, the upper two spaced about 2 inches apart. They are reinforced on one side by three vertical and two diagonal battens, as shown in the illustration at the left. These gates are hung on "No-Sag" Adjustable Gate Hinges. The lower hinge is quickly adjustable by ratchet action to take up the sag, so the gate always swings clear of the ground. The gate may also be raised to allow small animals to pass under it. This feature is of great convenience and importance. Two barrel bolts keep the pen partition securely in place. If you want to remove one of these gate partitions, push back the bolts and lift gate off. This facilitates cleaning of pens. You may also increase or reduce size of pen at will. In fact, this gate partition is of such general practical advantage that we recommend no other.

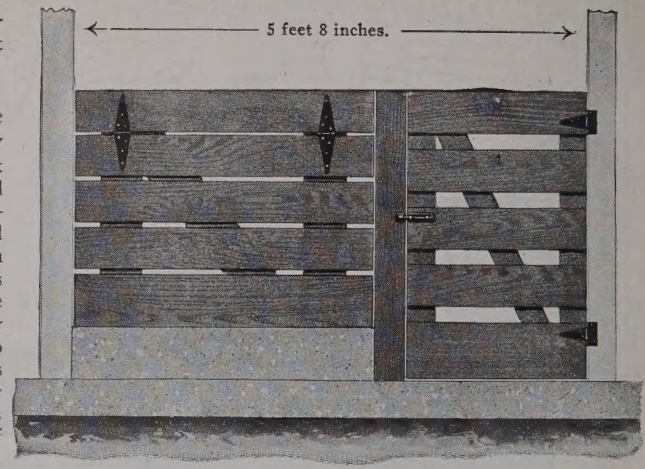

56A5115—Front Panel Hog House Pen Partition, "Already Cut" and Fitted.
Price, per Front Panel as Shown, Including Hardware.....$4.26

THE FRONT PANELS consist of one door and a swinging feed panel over the trough. Door is hung on solid T hinges and secured by an outside bolt. Swinging feed panels hang on solid strap hinges. They open to the inside and close against the outer edge of trough.

"ALREADY CUT" CRATES. The crates shown here are "already cut" and bundled. They may be **nailed** together in a few minutes. Hang your saw on the hook and never touch it. These crates are the result of practical experience. The bottom is to be built on two runners, on which the flooring is nailed. This method of construction permits sliding the crate into cars without "racking" or breaking the crate.

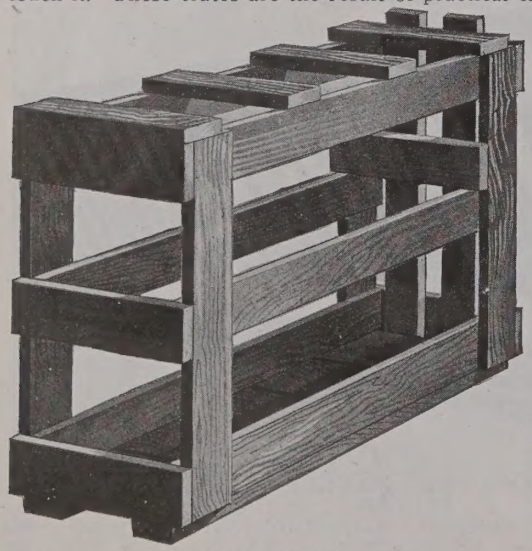

Hog Crate 56A5112.

Crates are made of 1x6-inch and 1x4-inch material, trimmed down to standard sizes. All the lumber used for these crates is of good, sound quality. Two points guided us in the construction of these crates—strongest possible construction and lightest shipping weight. You will not pay for "dead" weight freight when using our crate. The price of our crates is so low, you can hardly afford to waste time and money by buying and sawing the lumber. Remember, every crate is "already cut" and bundled, nothing left for you to do but nail the pieces together. The necessary nails are included in the price. **Shipped from factory in SOUTHERN ILLINOIS.**

Prices of Crates.

Catalog No.	Length, Inches	Inside Width, Inches	Height, Inches	Price, Cut and Bundled, Each
56A5112	36	12	24	**$0.80**
56A5112	48	16	30	**1.27**
56A5112	54	18	34	**1.42**
56A5113	64	25¼	36	**1.92**
56A5113	72	26	40	**2.15**

NOTE—Hog Crates 56A5112, 16 and 18 inches wide, have four side and four end bars each; that is, **ONE MORE** than shown in illustration.

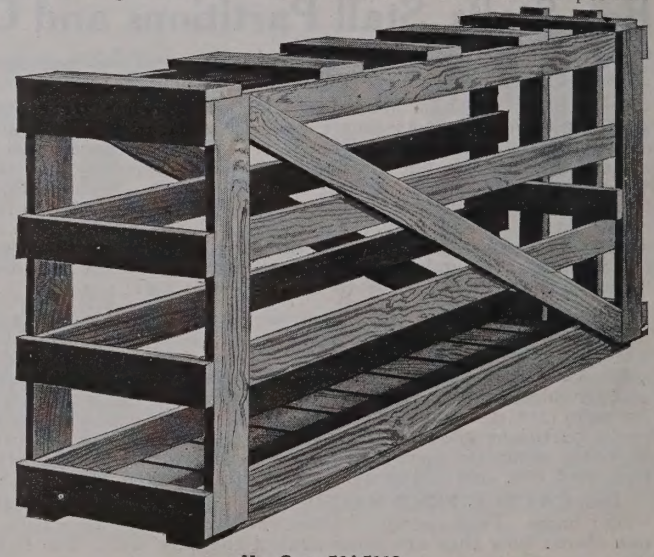

Hog Crate 56A5113.

MAJESTIC VENTILATORS

For Barns and Stables

Our Majestic Ventilators are scientifically designed and constructed. They have been planned according to the best and most approved scientific methods.

The size of ventilator required is governed by the number of stock in the building. If you have more than twenty head under one roof you should have two or more ventilators of the larger size.

Each ventilator has a continuous draft arrangement to draw out the foul air and replace it with fresh air, without causing a draft.

Any one of these ventilators will go a long way in making any outbuilding attractive, but its main service consists in keeping the building perfectly ventilated under all weather conditions. Leading agricultural authorities agree that ventilation is absolutely necessary in order to get the best results from stock of any kind. Animals will thrive better in a building continually supplied with pure, fresh air. Considering the low price and the high quality of our ventilators, no farmer can afford to be without one.

Lightning rod connections, consisting of heavy copper wire, properly fastened inside of ventilator, $3.75 extra.

Your choice of gold bronzed horse or cow weather vane with Majestic Ventilators.

Prices on steel products are subject to market changes. If the market prices go lower, customers get the benefit of the reduction.

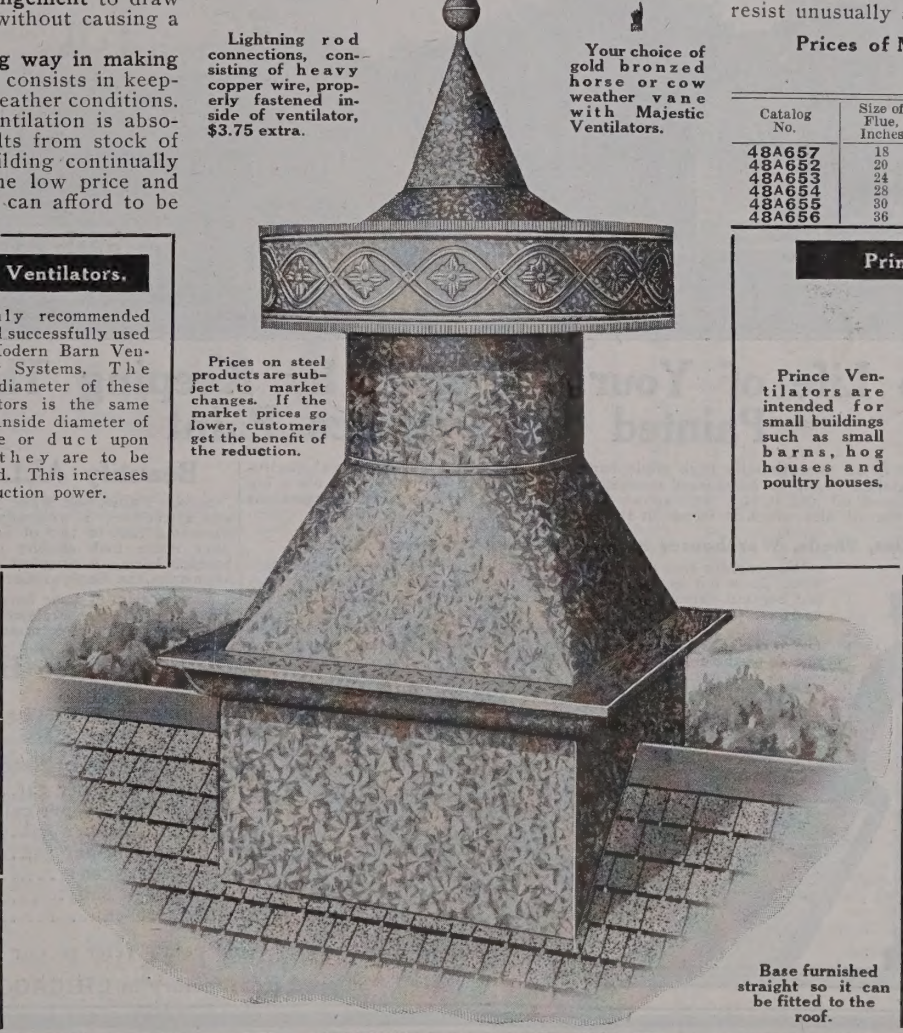

Base furnished straight so it can be fitted to the roof.

Extra heavy 22, 24 and 26-gauge galvanized steel is used in the manufacture of our Majestic Ventilators, according to size. Nothing thinner than 26-gauge galvanized steel is permitted. An unusually thick stock.

Each ventilator is equipped with four stay rods which hold it securely in place on the roof. A wire screen is provided to keep the birds out. When properly secured to the roof, our ventilators, owing to their weight and scientific attachment, will resist unusually severe storms.

Prices of Majestic Ventilators for Large Buildings.

Shipped From OHIO Factory.

Catalog No.	Size of Flue, Inches	Size of Base, Inches	Height	Wt., Lbs.	No. of Cattle	Price
48A657	18	26	7 ft. 6 in.	115	4	$21.35
48A652	20	29	8 ft. 8 in.	155	6	27.70
48A653	24	36	9 ft. 5 in.	182	8	33.35
48A654	28	40	10 ft. 4 in.	235	12	37.70
48A655	30	44	10 ft. 6 in.	252	14	40.35
48A656	36	55	11 ft. 3 in.	396	20	49.00

Leader Suction Ventilators.

Highly recommended for, and successfully used with Modern Barn Ventilating Systems. The inside diameter of these ventilators is the same as the inside diameter of the flue or duct upon which they are to be mounted. This increases their suction power.

Prices of Leader Suction Ventilators for Large Buildings.

Shipped From OHIO Factory.

Catalog No.	Size of Flue, Inches	Height, Inches	Weight, Pounds	Price
48A647	18	20	60	$10.35
48A648	20	24	68	13.35
48A649	24	28	80	15.00

Prince Ventilators for Small Buildings.

Prince Ventilators are intended for small buildings such as small barns, hog houses and poultry houses.

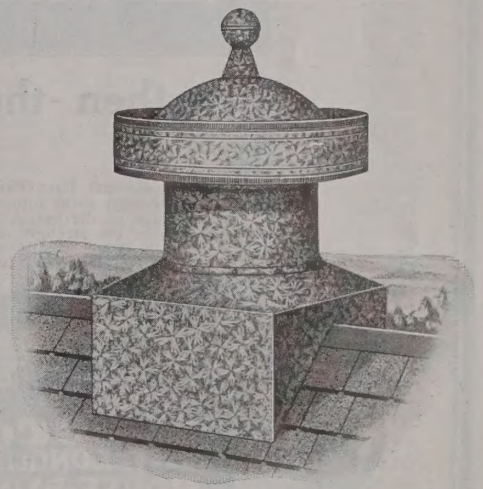

BASE FURNISHED STRAIGHT SO IT CAN BE FITTED TO THE ROOF.

Prices of Prince Ventilators for Small Buildings.

Shipped From OHIO Factory.

Catalog No.	Size of Flue, Inches	Size of Base, Inches	Height	Wt., Lbs.	Price
48A650	16	22	3 ft. 5 in.	55	$10.30
48A651	18	24	3 ft. 6 in.	58	12.00

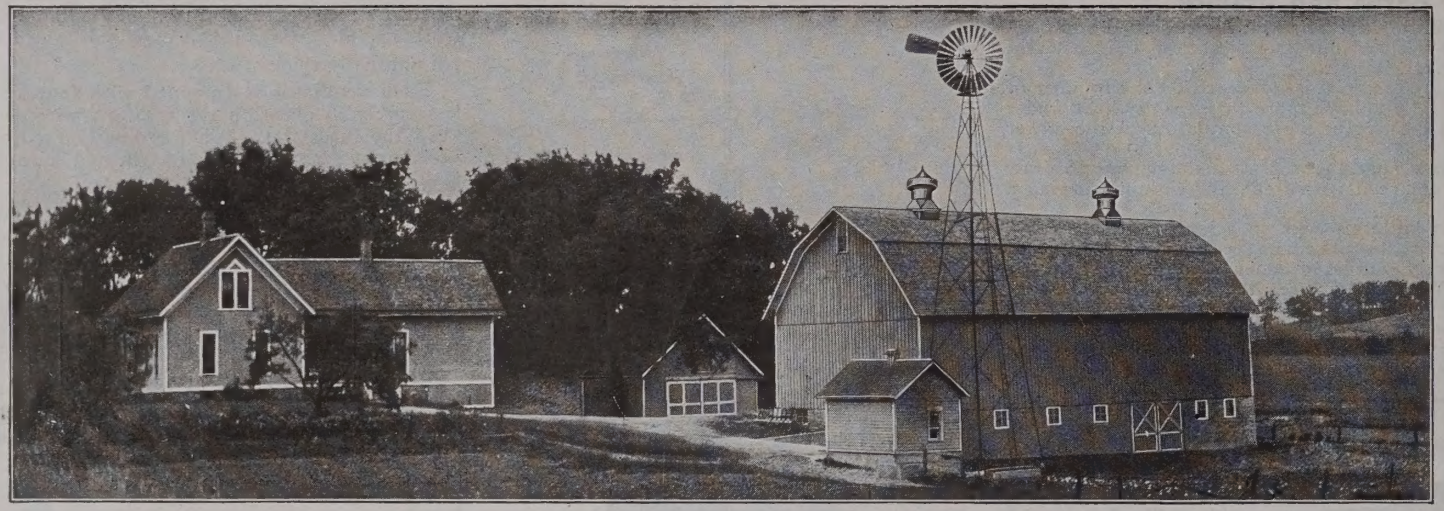

Lengthen the Life of Your Buildings by Keeping Them Always Painted With Seroco Paint

SEROCO Mineral Barn Paint is an exceptionally high grade barn paint. We have put more real quality into our barn paint formula than might be considered necessary for a paint of this class. We use a big percentage of the purest linseed oil and it is a well known fact that the life of any paint is dependent largely on the strength of the oil film which it forms on the surface painted.

For All Barns, Stables, Sheds, Warehouses and All Outbuildings and Fences.

We consider this a first class paint that will give perfect satisfaction. It is not ground quite so fine as our house paints and does not contain expensive lead and zinc pigments which must be used in house paints for the more delicate colors.

Although we specify Oxide Red Seroco Mineral Barn Paint for the body of all barns shown in this catalog, you may have your choice of the following colors if you prefer:

Mineral Barn Paint

30A5800—Oxide Red
30A5820—Dark Gray
30A5830—Yellow
30A5850—Maroon

We furnish enough Barn Paint with every barn for two good coats, but you will want to paint your other barns and outbuildings. Order the additional paint and include the money in your order for your barn.

Prices of above colors.		Per Gal.
★50-gallon barrel	(Shpg. wt., 700 lbs.).	$1.58
★25-gallon half bbl.	(Shpg. wt., 350 lbs.).	1.65
5-gallon kit	(Shpg. wt., 70 lbs.).	1.70
3-gallon can	(Shpg. wt., 45 lbs.).	1.71
1-gallon can	(Shpg. wt., 15 lbs.).	1.72

Beautify ALL Your Buildings

Seroco Paint will make your farm buildings beautiful and attractive. If you want to make the old home new, give it a coat or two of Seroco House Paint. Don't let your house look shabby in contrast with your nicely painted barn. A complete line of House Paint colors is shown in the General Catalog.

For the trim of your barns we furnish 30A5243, Outside White Seroco House Paint. However, if you prefer, you may have your choice of any of the following colors:

Seroco House Paint

30A5215—Cream
30A5207—Lemont Stone
30A5259—Light Gray
30A5235—Light Stone
30A5218—Buff
30A5244—Medium Green

Prices of Seroco House Paint.

★50-gal. bbl., per gal.	(Shpg. wt., 750 lbs.).	$2.40
★25-gal. ½ bbl., per gal.	(Shpg. wt., 375 lbs.).	2.50
5-gal. can, per gal.	(Shpg. wt., 75 lbs.).	2.55
3-gal. can, per gal.	(Shpg. wt., 45 lbs.).	2.57
1-gallon can	(Shpg. wt., 15 lbs.).	2.58
½-gallon can	(Shpg. wt., 10 lbs.).	1 35
1-quart can	(Shpg. wt., 6 lbs.).	.71

For actual colors of these paints refer to our General Catalog.

★Shipped from factory in CHICAGO, ILL.

$95.00 BUYS AN 8x20-FOOT SELECT YELLOW PINE COLUMBIA SILO

The Columbia Silo is guaranteed to give perfect satisfaction and service. It is shipped to the purchaser with the understanding that if it is not exactly as we represent it, the entire silo, or any part of it, can be returned to us at our expense and the purchase price and all transportation charges will be promptly returned.

Columbia Silos are furnished with full length Clear Fir Staves, this being our highest grade, and full length Select Fir Staves, our next grade below Clear. We also furnish Columbia Silos made with Select and Better Fir Spliced Staves and Select Yellow Pine Spliced Staves, same being joined together with galvanized steel splines.

CLEAR GRADE is our highest grade and is practically clear of all defects, as its name implies, furnished only in Fir.

SELECT GRADE Fir or Yellow Pine contains minor defects, which, however, will not injure its use for a good, tight, substantial silo.

Spliced Staves are furnished in SELECT and BETTER GRADE Fir and **Select Yellow Pine.** Two pieces of these staves are joined together with a galvanized steel spline to make the required length.

All of our staves are worked from 2-inch stock planed on both sides, edges worked with tongue and groove.

Do not let our low prices bring any question to your mind concerning the quality of our Silos. We never sacrifice quality for price.

DOORS AND FRAMES—Our door frame is one of the strongest on the market, made of the same quality of material as our staves. The cross braces are made of 2x4s bolted to the uprights. The frame is further reinforced by a ¼x2½-inch bar of steel, which gives great strength to the door frame. The door is so arranged that the inside is practically smooth, allowing the silage to settle freely, as it should.

OUR SILOS ARE TIGHT—The doors are interchangeable and are drawn to place by means of a heavy tail nut and bolt on each side which clamps a heavy piece of steel against the outside of the frame.

FELT GASKETS—Are provided to be tacked on the doors.

HOOPS AND LUGS—Hoops are made of 9/16-inch steel in three or four sections for each hoop, depending on the diameter of the silo, and have standard machine cut threads extending 7 inches from each end, which gives 3 feet and 6 inches draw on each hoop. Strong malleable iron lugs and clean, well fitted nuts join the ends of the hoops.

SAVE ON FREIGHT—If a few men club together, ordering four or five silos, the freight will be reduced considerably by shipping in carload lots (approximately 30,000 pounds). Send us the names of your neighbors who are interested.

If you are unable to secure a sufficient number of neighbors to join you in ordering a carload, send us your own order anyway. Send it early, specifying the latest shipping date that will be convenient to you, and we may be able to include your silo with others coming near to your station.

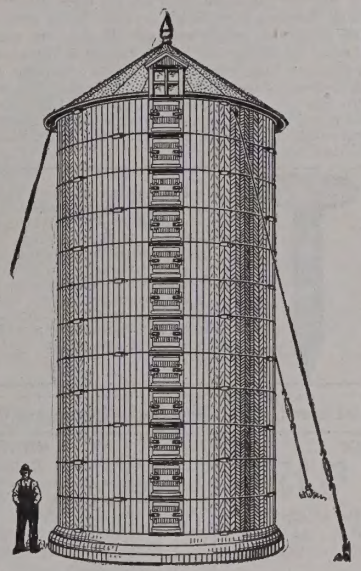

SAVED $50.00—LUMBER A1.

Sears, Roebuck and Co. Chagrin Falls, Ohio.
Gentlemen:—I am well pleased with the silo I purchased from you and have saved about $50.00 on the order over any price I was able to get elsewhere. The lumber is A1. Very truly yours, D. D. GORE.

Prices of Yellow Pine and Fir Columbia Silos Loaded on Cars at Factory.

Diameter, Feet	Height, Feet	Number of Hoops	Estimated Capacity, Tons	Number of Cattle	Approximate Weight, Without Roof, Pounds	Full Length Clear Fir Staves Without Roof, but With Anchors, Cables, Turnbuckles and Hoops **56A1241**	Full Length Select Fir Staves Without Roof, but With Anchors, Cables, Turnbuckles and Hoops **56A1240**	Spliced Select and Better Fir Staves Without Roof, but With Anchors, Cables, Turnbuckles and Hoops **56A1242**	Spliced Select Yellow Pine Staves Without Roof, but With Anchors, Cables, Turnbuckles and Hoops **56A1244**
8	20	9	20	6	3,200	$119.00	$113.00	$110.00	$ 95.00
8	24	11	25	7	3,850	161.00	157.00	151.00	127.00
10	20	9	30	8	4,400	160.00	154.00	148.00	129.00
10	24	10	36	11	5,250	191.00	183.00	176.00	152.00
10	28	13	44	13	6,100	222.00	213.00	206.00	177.00
10	30	13	48	14	6,525	239.00	231.00	219.00	189.00
10	32	14	53	15	6,950	254.00	246.00	233.00	202.00
12	20	9	45	12	5,200	186.00	178.00	171.00	145.00
12	22	10	50	14	5,725	200.00	194.00	186.00	158.00
12	24	11	55	16	6,250	219.00	210.00	201.00	174.00
12	26	12	60	16	6,775	237.00	227.00	218.00	186.00
12	28	12	68	18	7,300	256.00	246.00	237.00	202.00
12	30	13	76	22	7,800	281.00	270.00	259.00	214.00
12	32	14	86	25	8,300	291.00	280.00	268.00	229.00
12	34	15	94	27	8,800	309.00	295.00	282.00	242.00
14	20	9	60	16	6,050	208.00	199.00	191.00	162.00
14	22	10	66	18	6,650	229.00	219.00	208.00	177.00
14	24	11	73	21	7,250	249.00	239.00	227.00	194.00
14	26	12	80	23	7,850	270.00	258.00	253.00	209.00
14	28	12	90	26	8,450	289.00	276.00	264.00	226.00
14	30	13	100	28	9,000	319.00	297.00	293.00	240.00
14	32	14	110	32	9,600	335.00	316.00	302.00	256.00
14	34	15	120	34	10,200	349.00	336.00	321.00	274.00
16	24	11	95	27	8,350	278.00	267.00	254.00	214.00
16	28	12	111	33	9,650	325.00	312.00	297.00	251.00
16	30	13	120	35	10,200	357.00	342.00	329.00	266.00
16	32	14	130	38	10,850	368.00	355.00	337.00	283.00
16	34	15	142	40	11,500	392.00	378.00	357.00	302.00
18	28	12	140	40	10,200	356.00	342.00	324.00	272.00
18	30	13	150	44	10,800	392.00	378.00	357.00	289.00
18	32	14	162	46	11,500	403.00	385.00	368.00	308.00
18	34	15	180	50	12,200	428.00	416.00	391.00	326.00
20	28	12	170	49	11,200	394.00	377.00	357.00	297.00
20	30	13	185	52	12,000	431.00	410.00	392.00	314.00
20	32	14	200	56	12,800	443.00	425.00	402.00	335.00
20	34	15	220	63	13,600	471.00	448.00	427.00	362.00

Galvanized Steel Roofs.

26-gauge steel. This roof is self supporting, the standing seams of four thicknesses of steel serving as rafters. Filling door and ventilator included.

Prices of Galvanized Steel Roofs Without Dormer or Sash.

To Fit Silo Diameter (Outside)	**56A1245** Price	Weight
8 feet	$15.75	145 pounds
10 feet	22.50	185 pounds
12 feet	28.50	245 pounds
14 feet	39.00	310 pounds
16 feet	48.00	400 pounds
18 feet	61.00	540 pounds
20 feet	76.50	700 pounds

56A1248—Steel Dormer and Glazed Sash, with hinges and screws for dormer, extra.....$8.50
Shipped from factory in OHIO.

MONEY SAVERS.

Felt Gaskets for Any Silo.

Be sure to tell us the name and size of your silo and we will send you the proper quantity of good felt gaskets, ready to tack on. Do not delay ordering this until too late, as doors that are not tight cause the silage to decay.

56A1250—Felt Gaskets.	Price
For silos 24 feet or less in height	$1.50
For silos 24 to 30 feet high	1.75
For silos 30 to 36 feet high	2.25

The above prices include sufficient quantity for a complete silo of size given. Shipping weight of any of above gaskets, each, about 1 pound.

Silo Door Hinges.

Allow the Door to Swing Back Into Silo.
Price, 75c per Set Extra for Each Door.
When ordering this patent door hinge for Columbia Silos be sure to order **56A1246.**

Prices for Complete Hoops.

56A1261

Diameter	Price, Each	Weight
8 ft.	$1.85	30 lbs.
10 ft.	2.20	39 lbs.
12 ft.	2.50	48 lbs.
14 ft.	2.85	55 lbs.
16 ft.	3.15	62 lbs.
18 ft.	3.60	69 lbs.
20 ft.	3.90	78 lbs.

Yellow Pine Silos Shipped From SOUTHERN ILLINOIS; Fir Silos Shipped From Factory in MINNESOTA.

Anchor Complete.

56A1262

Height	About	Price, per Set of Three
20 to 26 ft.	75 lbs.	$6.25
28 to 34 ft.	100 lbs.	7.25

Malleable Iron Lug for Silo Hoops.

56A1264
Weight, 1 pound.
Price, each.....13c

BEST-OF-ALL ROOFING

AN ASPHALT FELT ROOFING—One of the thickest, heaviest and most durable smooth finish roofings made.

TEST BEST-OF-ALL ROOFING FOR
1. THICKNESS.
2. WEIGHT.
3. FLEXIBILITY AND STRENGTH.
4. QUALITY.

If you make these four tests there will be but one result. Whether it be for house or barn you will buy Best-of-all Roofing. There is no doubt about Best-of-all wearing qualities.

The Four Tests, simple as they may seem, will more than convince you. Examine the roofing carefully when it arrives and judge it for yourself. **We Guarantee Every Roll of 65-Pound Best-of-all Roofing for Sixteen Years.** If you are not satisfied we will return your money; you simply take no risk whatever.

Our **Best-of-all Roofing** will outwear tin, tar or gravel roofing. It has stood the test in all climates. A weatherproof and fire resisting roofing that looks like silver, feels like rubber and wears longer than steel. Made of heavy, strong, long fibered roofing felt, saturated with high grades of imported asphalt. Best-of-all Roofing is elastic, pliable and tough, not affected by changes in climate, vapors, steam or gas and will not rust. It is free from odor and will not discolor rain water; it can be used on any roof with a pitch of 1½ inches or over per running foot.

It is a fact that roofing of good quality will outwear wood shingles. Here's your chance to buy it at a fraction of their cost.

All the material that enters into the manufacture of Best-of-all Roofing is of high grade. High grades of roofing felts and high grades of **imported asphalt** only are used. Then we analyze all material thoroughly before we use it in manufacturing our roofing, so that we can feel satisfied that positively everything going into the makeup of this roofing is high grade. These precautions, together with the use of only the latest improved machinery, skilled workmen and manufacturing every roll under very careful inspection, result in Best-of-all Roofing being one of the most durable smooth finished roofings made.

We furnish with every roll of our Best-of-all Roofing large headed galvanized roofing nails and plenty of cement for lapping seams or joints. If this roofing is to be used over shingles, be sure to add 10 cents per roll for 1¾-inch nails, otherwise ⅞-inch nails will be sent. Long nails not furnished with 1 and 1½-ply roofing. We recommend the heavier roofing when it is to be put on over shingles.

Each roll of this roofing contains 108 square feet and will cover 100 square feet. Rolls are 3 feet wide.

It Is Fire Resisting and Waterproof. It Is Better and Cheaper Than Tin, Tar and Gravel, or Any Other Kind of Roofing and Will Outwear Them All.

48A33
65-Pound Rolls. Formerly known to the trade as 4-Ply **$3.60** Per Roll
Shipped from CHICAGO, ILL., PHILADELPHIA, PENNA., ALBANY, N. Y., ST. PAUL, MINN., or SOUTHERN OHIO.
Shipped from either of the following warehouses: KANSAS CITY, MO., or ATLANTA, GA., at **25** cents per roll extra.
Approved by Underwriters' Laboratories, Inc., Under Direction National Board of Fire Underwriters.
GUARANTEED TO WEAR 16 YEARS.

48A3032
50-Pound Rolls. Formerly known to the trade as 2½-Ply **$3.15** Per Roll
Shipped from CHICAGO, ILL., PHILADELPHIA, PENNA., ALBANY, N. Y., ST. PAUL, MINN., or SOUTHERN OHIO.
Shipped from either of the following warehouses: KANSAS CITY, MO., or ATLANTA, GA., at **20** cents per roll extra.
GUARANTEED TO WEAR 14 YEARS.

48A3031
40-Pound Rolls. Formerly known to the trade as 1½-Ply **$2.45** Per Roll
Shipped from CHICAGO, ILL., PHILADELPHIA, PENNA., ALBANY, N. Y., ST. PAUL, MINN., or SOUTHERN OHIO.
Shipped from either of the following warehouses: KANSAS CITY, MO., or ATLANTA, GA., at **20** cents per roll extra.
GUARANTEED TO WEAR 11 YEARS.

Be sure to ask for "long nails" if this roofing is to be used over old shingles, and allow 10 cents per roll extra.

YOU CAN LAY THIS ROOFING YOURSELF

WATER TEST.

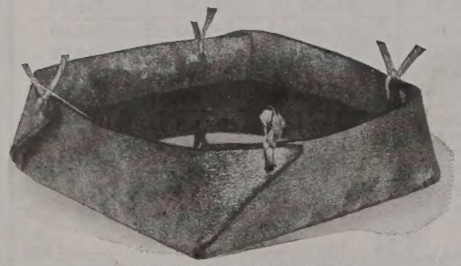

This illustration shows a pan formed of the heavy grade Best-of-all Roofing filled with water. This water test can easily be made by bending up the edges of a piece of roofing, so that the water will remain in the dish so formed. It will hold the water until it evaporates, without a drop soaking into the roofing. Best-of-all is absolutely waterproof, just as waterproof as anything can be. It never injures or taints the rain water flowing from it, which may be used for domestic purposes.

Best-of-all will not rot.

CHIMNEY FLASHING.

For chimney flashing see our Longlife Elastic Compound in our Big Catalog. It is a safe and easy way of flashing a chimney to make a perfectly watertight joint. For Best-of-all Ridge Roll, Flashing and Valleys to match see our Big General Catalog.

STRENGTH TEST.

An actual photograph of three large men (total weight, 613 pounds) sitting on a sheet of the heavy grade Best-of-all Roofing, showing the great strength of this material.

One Order Brings It All

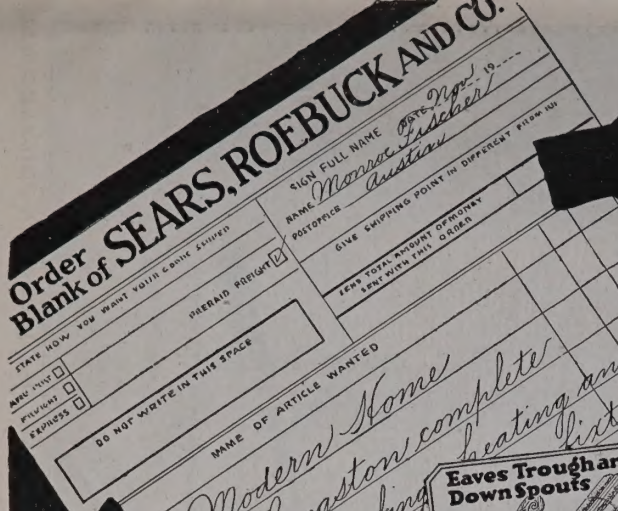

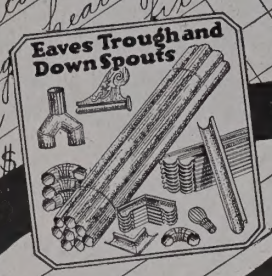

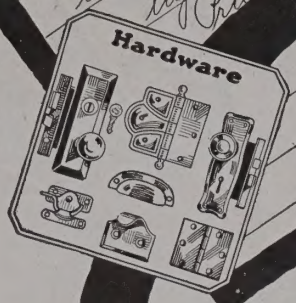

WHEN YOU PURCHASE A HOUSE FROM SEARS, ROEBUCK AND CO.

You dispose of the entire transaction in a few minutes. You select your house from our Book of "Honor Bilt" Modern Homes, merely writing down the name or number, and on receipt of your order we ship at the prices quoted:

THE LUMBER,
LATH AND
SHINGLES;
MILL WORK, SUCH AS
DOORS,
WINDOWS,
MOLDING,
BUILDING PAPER,
FLOORING,
PORCH MATERIAL, ETC.;
HARDWARE,
NAILS,
EAVES TROUGH,
DOWN SPOUT,
PAINT
AND VARNISH

At Your Option: Steam Heating, Furnace Heating, Plumbing Outfit, Electric Wiring, Gas and Electric Fixtures, Wall Paper and Electric Lighting Plants Furnished Extra.

See how much more convenient this is than to be compelled to go to a dozen places for as many different items, each transaction requiring time, expense and worry.

In addition to saving you time and worry in selecting, pricing, etc., you can be sure when you send us your order for a Modern Home that you will make a considerable saving in dollars and cents. Thousands of our customers who have built houses according to our plans and with our materials in almost every state of the Union have proved this to their own satisfaction.

You can even go further and benefit yourself still more by including in your order not only all of the materials for your Modern Home as illustrated on this page, but by adding to your order, to be shipped when convenient to you, your **rugs, furniture,** perhaps a **piano, a Silvertone Phonograph, chinaware, silverware, suits, dresses, linen, etc.,** all of which you will find illustrated, described and priced in our big **General Catalog.**

Doesn't it seem reasonable to you that because we very much desire all of your patronage year in and year out, we should be very particular when selling you a Modern Home to give you **the best that money can buy for this purpose?** A large number of our customers deal with us regularly for their everyday needs because of the splendid material we gave them for their Modern Homes and the substantial savings our prices enabled them to make.

SEARS, ROEBUCK AND CO.

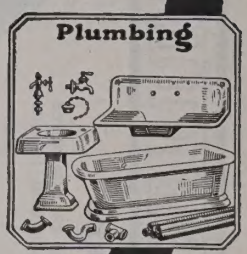

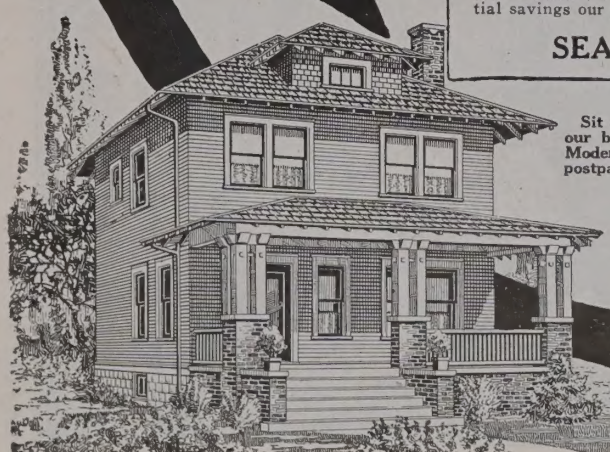

Sit down and write us a letter or use a post card for our beautifully illustrated new Book of "Honor Bilt" Modern Homes 596Ba, which will be mailed to you postpaid on request.

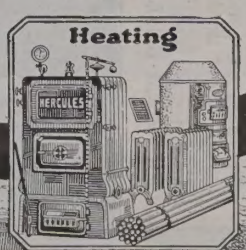

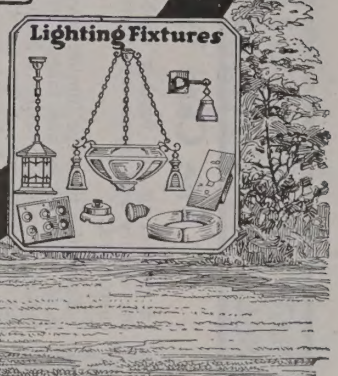

MADE ENTIRELY FROM SELECTED LUMBER

BETTER FARM BUILDINGS

SHELTERED FROM RAIN, SUN, SOOT AND WIND

The Care We Take

In protecting our lumber enables us to guarantee the quality and insure complete satisfaction to our customers.

From the time the lumber leaves the sawmill until it is required in our factory it is thoroughly protected from the weather. Notice the 800-foot loading platform—one of ten—in the small picture and the large, well built rainproof warehouses below. Is it not reasonable that the doors, windows, frames, etc., manufactured from high grade lumber so protected should be more satisfactory in every way than the same articles made from lumber exposed to rain, snow, hail, soot and dust?

We load our lumber direct from our covered platforms into box cars for QUICK DELIVERY TO OUR CUSTOMERS. "Better lumber" means BETTER FARM BUILDINGS.

THESE SOLIDLY CONSTRUCTED RAIN-PROOF WAREHOUSES PROTECT OUR LUMBER UNTIL IT IS REQUIRED IN THIS FACTORY.

Methods That Make Better Material

If we could show you through our modern factory and let you see for yourself the many money saving devices we have installed, you would understand why we offer such excellent quality at the low prices printed in this book.

The high grade lumber which you see piled in the big warehouses below is always clean and dry. Each pile of lumber, containing nearly a carload, rests upon a movable truck which, when the lumber is needed, can be quickly transferred to the tracks in the foreground and pushed either into the dry kilns or wherever required. All lumber handled at our factory is unloaded from the cars on to these trucks and kept ready for use at a moment's notice.

You can see how different this process is from the old custom where selections were made from one pile and another and carried by wagon in small quantities (requiring much time and labor) to the different places around the factory where the workmen were waiting for it. All the money saved by our quick, modern system of handling lumber GOES DIRECT TO YOU in the way of better material for YOUR MODERN FARM BUILDING.

"HONOR BILT" FARM BUILDINGS ORDER BLANK

Four Methods of Payment: 1—CASH WITH ORDER; 2—Pay as Building Goes Up; 3—Pay After Inspecting Material; 4—EASY PAYMENTS

IS THERE A FREIGHT AGENT at your railroad station?.....

HOW TO SEND MONEY. The best and safest ways to send money are by Postoffice Money Order, Express Money Order, Bank Draft or Check.

DO NOT SEND COIN; it is liable to break through the envelope and be lost. If absolutely necessary to send coin BE SURE to wrap it in strong paper before putting it in the envelope, and then send by REGISTERED MAIL.

DO NOT WRITE IN THIS SPACE

SIGN FULL NAME.

DATE.....192

NAME .....

POSTOFFICE .....

R. F. D. No..... BOX No..... STATE.....

STREET AND No.....

GIVE SHIPPING POINT IF DIFFERENT FROM POSTOFFICE.

NAME .....
(Give name here only when shipment is to be made to another party. If to yourself leave space blank.)

SHIPPING POINT .....

COUNTY..... STATE.....

STATE TOTAL AMOUNT OF MONEY SENT WITH THIS ORDER	DOLLARS	CENTS

Sears, Roebuck and Co.

1. CASH WITH ORDER

In accordance with your guarantee of satisfaction or money returned, enclosed please find.....
(State whether Postoffice or Express Money Order, Draft, Check or Letter of Deposit.)

for $..... for your Modern Farm Building No.....described on page.....of your Book
(State number and size of building wanted.)
of "HONOR BILT" Barns. The order is sent with the understanding that, in addition to the lumber, mill work and roofing your price includes nails, hardware and painting material, as well as building plans.

YOUR MONEY, INCLUDING ANY TRANSPORTATION CHARGES YOU PAID, WILL BE IMMEDIATELY RETURNED TO YOU FOR ANY GOODS NOT PERFECTLY SATISFACTORY.

.....
(Sign your name on this line.)

Color of paint for outside body.....

Color of paint for outside trim.....

2. PAY FOR THE MATERIAL AS THE BUILDING GOES UP

If you are building by an arrangement with a bank or building and loan association, we will ship the material to you upon the receipt of a letter from the bank or the building and loan association stating that payments for the material will be made at certain periods as the work progresses.

3. PAY AFTER INSPECTING MATERIAL

If you would like to inspect material before sending us the money you can deposit the payment required with your bank or building and loan association and send us with your order this **letter of deposit.** This will give you a chance to inspect your material before we get a cent of your money.

LETTER OF DEPOSIT

.....192

Postoffice..... State .....

Sears, Roebuck and Co.

Gentlemen:—

.....has deposited with us the sum of $.....
which has been set aside subject to your order, same to be paid to you upon delivery of the building material, ordered of you, with the understanding that the goods must conform with your specifications and meet with depositor's approval. The material is to be inspected immediately upon its receipt and, if satisfactory, accepted by the depositor, who will then notify us to send you the money. Yours truly,

.....
(Name of Bank or Building and Loan Association.)

.....
(Signature of Officer and Title.)

SEARS, ROEBUCK AND CO.

4. EASY PAYMENTS

(SEE OTHER SIDE)

F6015.Rev.3.28.21

4. EASY PAYMENT PLAN

If it is not convenient for you to pay cash according to the terms on the other side of this blank, we may still be able to ship you the material under our **Easy Payment Plan.**

Land Free and Clear From Debt.

If you own farm land free and clear from debt, Sears, Roebuck and Co. will ship Farm Buildings on **Easy Payment terms.** You can pay in small monthly or half yearly installments. Should it be necessary, we will allow you five years' time to pay us. Interest only 6 per cent per year, payable half yearly.

Land Not Free and Clear From Debt.

Even if you should be owing on your property, we may be able to offer you the same liberal terms.

Here Is What Would Be Required of You in Either Case:

1. Show Title to your farm land.

2. Send us with order 2½ per cent of the amount that will be due us for material. This is to cover the cost of handling the transaction, such as examining title, drawing up papers and other expenses we do not have in connection with our regular cash with order business.

3. Make small payments each month for five years on the debt. Payments may be made every three months or every six months if more convenient. You can pay as much more than your regular payment as you wish, or even take up the loan in full any time during the five years.

Here Is What Sears, Roebuck and Co. Will Do:

Ship material and give you five years to pay.

By answering the following questions, we will be able to tell you what our terms will be in your particular case.

---

1. How long have you lived in place where now located? .....
2. How large is the farm? .....
3. Give name of owner .....
4. How much did it cost? $..... 5. Is it free and clear from debt? .....
6. If your property is not free from debt, please state how much you owe on it. $.....

   If a mortgage, tell us when it expires .....
7. Which of our farm buildings do you intend to put up? ..... (Number.) (Size.) (Price.)
8. When do you expect to start building? .....
9. What crops do you grow? .....
10. How many acres under cultivation? .....
11. What buildings are on the farm at present (mention value of each)? .....

    .....
12. How much will it cost you to have your building completed after our material reaches you? $.....
13. How much cash will you have to invest in the deal? $.....
14. How much can you pay us each month? $.....
15. Give name of bank you do business with .....

Your Name .....

Postoffice ..... State .....

R. F. D. No. ..... Box No. ..... Street and No. .....

PLEASE ANSWER ALL QUESTIONS.

SEARS, ROEBUCK AND CO.

LIBRARY OF CONGRESS

Important Notice!

THE barns we offer in this catalog are designed to meet almost any demand for interior arrangement. They have been built many times over, and actual experience proves that they are correct.

For this reason you will have no difficulty in selecting a barn that meets your requirements, the interior of which can be arranged to supply your needs. Use the sketch sheet enclosed with this book to indicate what kind of floor plan you prefer if you cannot use any of the plans shown in this book.

Our Service Department is ALWAYS ready to assist you. If, during the construction of your barn, you should fail to understand some detail, which is unlikely with our proved "Already Cut" system, write us, stating just what the difficulty is. We will promptly set you right.

The specialists of our Modern Farm Building Department are men who specialize only in designing and constructing farm buildings. The first service they render you is to make barn building simple, and, in connection with our low prices, attractive.

The much discussed "difficult task" of barn building has been reduced by us to a pleasing undertaking. This is probably the greatest service we render. All of this is covered by our liberal guarantee of "satisfaction or money back." All service is tendered for one purpose only—to help you build SUCCESSFULLY, without trouble or extra expense. It is to our personal interest to give you our BEST advice, for our reputation, our most valuable asset, is at stake in doing this.

QUALITY TALKS. The quality of our service and of our material, recommended and indorsed by you, are our only salesmen. We extend to you a cordial welcome to use the complete facilities of our Service Department.

Sears, Roebuck and Co., Chicago-Philadelphia

COMPLETE LINE OF HONOR-BILT MODERN FARM BUILDINGS

Sears, Roebuck and Co. Chicago - Philadelphia